
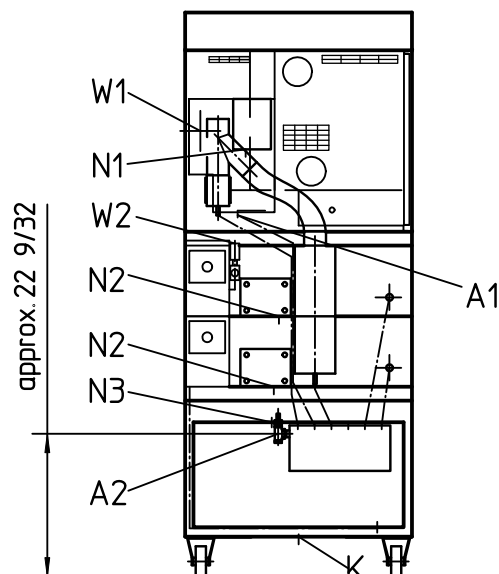
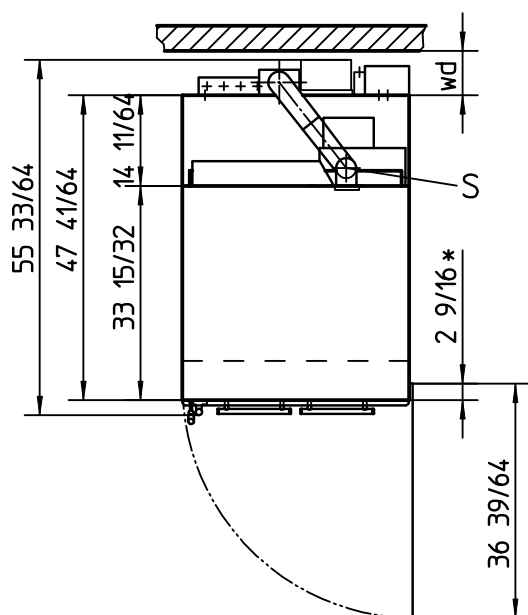
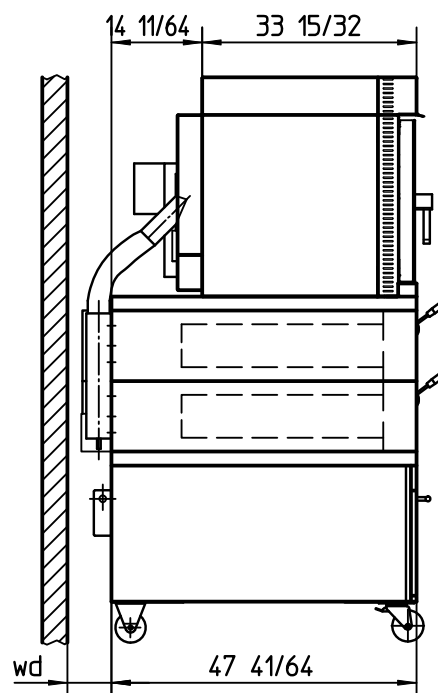


MIWE bakecombi consisting of:

EC 6.1826 / CO 2.0608 / proofer / rollers

Transmission, reproduction, utilization and communication of these technical data are not permitted unless expressly authorized by MIWE. Any noncompliance will result in obligation to pay damages. All rights reserved in the event of a patent grant or registration as a utility model.

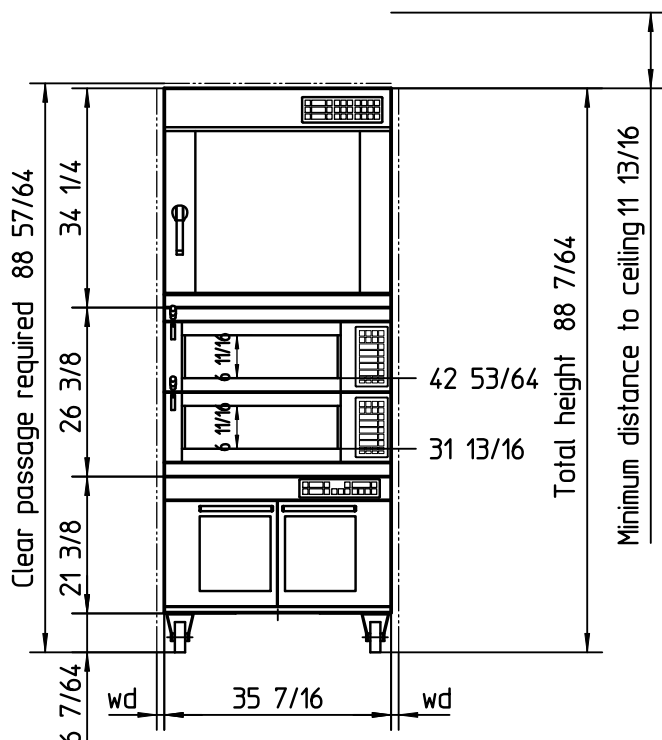

wd: Necessary minimum distance to walls:
to the side 1 3/16
to the rear side 6 57/64

* The customer should not install any covering in this area!

Minimum inside width of bring-in opening: 35 53/64

The door hinge (on the left or the right side) is to be carried out according to the order!

Total weight without baking trays: approx. 560kg

- A1 Baking chamber water outlet 3/4"-hose -for model with CC with drain to on-site pipe - not to siphon
- A2 Water discharge nom.diam. 1 7/64
- S Steam discharge nom.diam. 3 5/32
- K Condensate discharge 1/2"-hose
- N1 Power supply 9.9 kW (3x32A)**
- N2 Power supply 5.5 kW (3x20A)**
- N3 Power supply 2.0 kW (3x10A)**
- N Total power supply 22.8 kW (3x80A)**
- W1 Water supply R3/4"
- W2 Water supply R3/4"

** Protection by fuse with 208V, 3/-/PE, 60Hz

Water discharge provided by customer: minimum nominal diameter 1 31/32!

We reserve the right to change any technical specifications!

Datum	Name	Maßstab	Freig-Stab
03.08.17	V. Shirin.	1:30	
16.01.18	Schn. Mi.		
16.01.18	Schn. Mi.		
Bearbeiter			
Geprüft			
Freigegeben			

Michael Wenz GmbH · D-97450 Arnstein · Phone (+49 93 63) 68-0 · Fax (+49 93 63) 68 8400

MIWE