



Indigo NXT Series iP0420 Ice machine on D320C bin  
Ice machine and bin sold separately.

50 Hz

### ICE SHAPES



▶ **Half-Dice:**  
0.95 x 2.86 x 2.22 cm  
(3/8" x 1 1/8" x 7/8")



▶ **Dice:**  
2.22 x 2.22 x 2.22 cm  
(7/8" x 7/8" x 7/8")

### SIZE

▶ Up to 198 kgs (436 lbs)  
of daily ice production

### SPECIFICATIONS

#### Refrigerant: R290

▶ 240 g

#### BTU Per Hour

- 3,604 (average)
- 6,435 (peak)

#### Compressor: Nominal rating 1 HP

#### Operating Limits:

- ▶ Ambient temperature range: 4.4° to 43.3°C (40° to 110°F)
- ▶ Water temperature range: 4.4° to 32.2°C (40° to 90°F)
- ▶ Water pressure ice maker (water in)
  - Min. 137.9 kPA (20 psi)
  - Max. 551.1 kPA (80 psi)

#### Power

230/50/1

- ▶ Instant Power
  - 1056W
- ▶ Total Amps
  - 4.59 amps
- ▶ Maximum Fuse Size
  - Air-cooled: 15 amps

### FEATURES

- ▶ Sanitation
  - Hinged front door and removable components (water trough, tube, curtain, probe, pump) allow easy interior access and cleaning.
  - Select parts feature AlphaSan<sup>®</sup> antimicrobial protection.
  - Durable 304 stainless steel exterior resists corrosion.
  - Optional LuminIce<sup>®</sup> Growth Inhibitor helps control bacteria and yeast, with status indicator on display.
- ▶ Sustainability & Value
  - R290 natural refrigerant offers high performance with low global warming potential.
  - Icon-based easyTouch<sup>®</sup> display simplifies operation.
  - Acoustical probe and Active Sense ensure consistent ice production.
  - 24-hour diagnostics support preventative maintenance.
  - Programmable ice production reduces energy costs.
  - Lower lifetime cost through reduced energy and water use.

### ACCESSORIES

- ▶ LuminIce<sup>®</sup> II Virus and Bacteria Inhibitor  
Controls viruses and bacteria in the ice machine.
- ▶ External Scoop Holder  
Protect the ice scoop with the NSF approved versatile scoop holder.
- ▶ Arctic Pure<sup>®</sup> Plus Water Filters  
Reduce sediments and chlorine contaminants down to 0.5 microns. Use with a pre-filter is recommended.



LuminIce II



External Scoop Holder



Arctic Pure Water Filters

# INDIGO NXT iP0420

## Manitowoc 50 Hz Ice Cube Machine

IDP0420A | IYP0420A

### INSTALLATION


Minimum installation clearance:

Top/side: 30.5 cm (12")

Back is 12.7 cm (5")

Installation location must be indoors.

- A** Electrical Entrance (2) Options
- B** 3/8" (0.95 cm) F.P.T. Water Condenser Inlet (water-cooled units)
- C** 1/2" (1.27 cm) F.P.T. Water Condenser Outlet (water-cooled units)
- D** 1/2" (1.27 cm) Auxiliary Base Drain Socket
- E** 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet
- F** 1/2" (1.27 cm) F.P.T. Ice Making Water Drain
- G** 3/4" (1.91 cm) Bin Drain

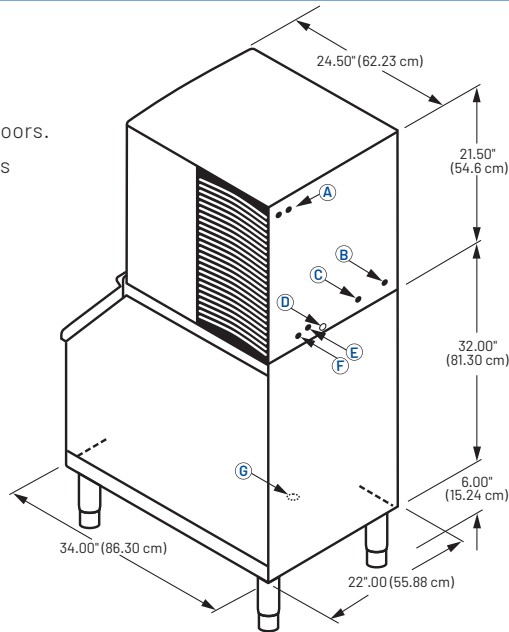

### SPACE-SAVING DESIGN



	iP0420 D320C	iP0420 D420C
Height	59.50" 151.13 cm	71.5" 181.61 cm
Width	22.0" 55.9 cm	22.0" 55.9 cm
Depth	34.0" 86.36 cm	34.0" 86.36 cm
Bin Storage	264 lbs 120 kgs	383 lbs 174 kgs

Height includes adjustable bin legs 6.00" to 8.00", (15.24 to 20.32 cm) set at 6.00" (15.24 cm).

Bin capacity is based on 90% of the volume x 33 lbs/ft<sup>3</sup> average density of ice. Ice machine and bin sold separately.

### SPECIFICATIONS

	Model	Ice Shape	Shipping Weight	Ice Production 24 Hours				Power Usage kWh per 45.4 kgs of ice @ 90° Air/70°F Water (32° Air/21°C Water)	Potable water usage L per 45.4kgs ice
				70° Air/50°F Water 21° Air/10°C Water		90° Air/70°F Water 32° Air/21°C Water			
Air Cooled	IDP0420A	Dice	62 kgs	432 lbs	196 kgs	380 lbs	172 kgs	4.66	53.8 L (14.22 gal)
	IYP0420A	Half Dice	62 kgs	436 lbs	198 kgs	395 lbs	180 kgs	4.48	51.6L (13.63 gal)

Order separately: Ice storage bin for all units.

R290 is a refrigerant grade propane which is naturally occurring with no ozone depletion potential and extremely low global warming potential.

#### Limited Commercial Warranty

**Ice Maker** Three (3) years parts and labor

**Evaporator** Five (5) years parts and labor

**Compressor** Five (5) years parts, three (3) years labor



2110 South 26th Street | Manitowoc, WI 54220 | United States  
+1.920.682.0161 | 920.683.7589 Fax | manitowocice.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners. ©2025 Pentair. All rights reserved.