



# INSTALLATION INSTRUCTIONS

## PERLICK TOUCHLESS FAUCETS ADAPTER FOR 944GN



904-088

**MODEL**  
904-088



### GENERAL INFORMATION

#### Introduction

Congratulations on your purchase of a Perlick Touchless Faucet Adapter. This manual has been prepared to assist you in the installation of your 904-088 Adapter.

We dedicate considerable time to ensure that our products provide the highest level of customer satisfaction. If service is required, your dealer can provide you with a list of qualified service agents. For your own protection, never return merchandise for credit without our approval.

We thank you for selecting a Perlick product and assure you of our continuing interest in your satisfaction.

#### Warranty

To register your product, visit our web site at [www.perlick.com](http://www.perlick.com). Click on "Commercial", then "Service". Click on the link "Warranty Registration Form". You must complete and submit this form or the installation date will revert back to the ship date.

Please record the purchase date and the dealer's name, address and telephone number below.

Model Number: \_\_\_\_\_

Order Number: \_\_\_\_\_

Purchase Date: \_\_\_\_\_

Dealer Name & Address \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_


Phone Number \_\_\_\_\_

## INSTALLING YOUR ADAPTER

### Step 1

Remove current faucet.

Backsplash must have 3 small screw holes and two large obrounds.

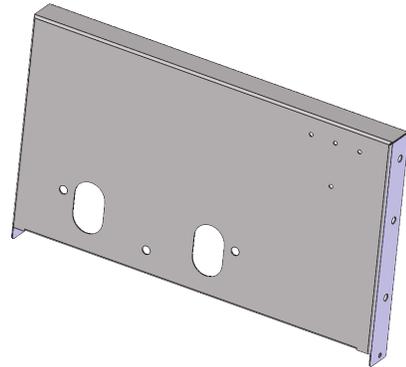


### Step 2

Remove faucet adapter from package and loosen the set screw with 5/64 hex key.


*(Note: Do not remove set screw).*

Separate the two packs.

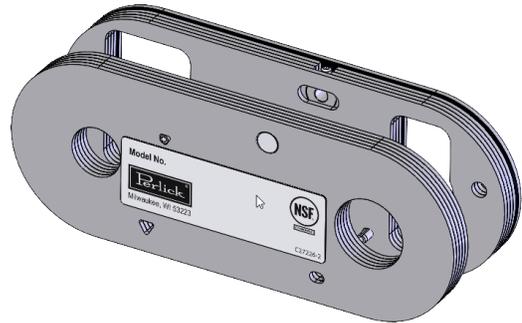

### Step 3


Place pack with set screw and flat gasket against back splash. Tighten pack of plates to back splash with 3 screws (provided).

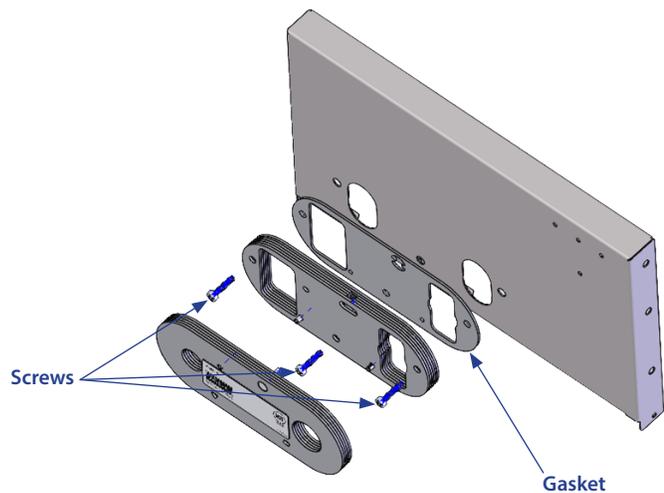

**Step 4**

Attach other pack to faucet using large brass nut and the small brass nut and hat channel on the adapter's back.

Before assembling, tighten brass elbow and flexible water line to back of faucet.

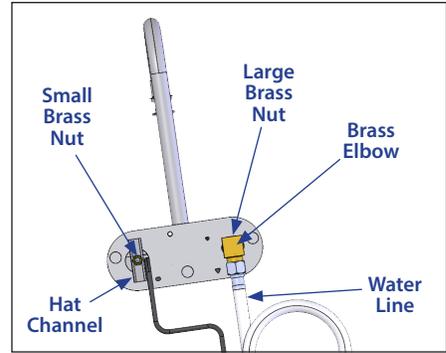


**Step 5**

Feed faucet water line and faucet electrical connection thru corresponding holes in the backsplash.

Align pins in adapter packs.

*(Note: Angle the top of the faucet and straighten it as you align the adapter pins.)*

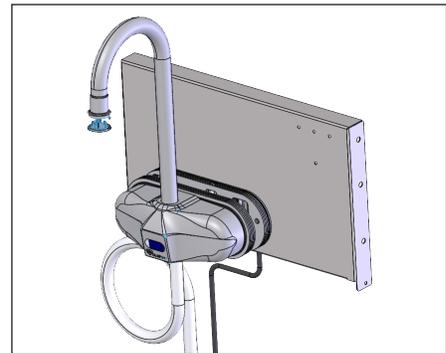


**Step 6**

Push faucet and adapter packs firmly together.

Tighten set screw to 5 to 10 in./lbs.

Inspect to ensure faucet is in place.

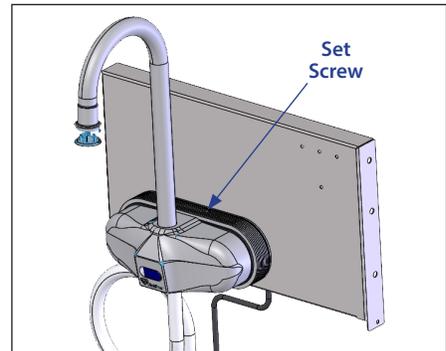

**Step 7**

Place band seal over spout and around adapter, snug to backsplash.



**Step 8**

See faucet installation instructions (included with faucet).



Form No. Z2735  
Rev. 04.09.2021