



## MAINTENANCE MANUAL





# Table of contents

<b>1. THE ESSENTIALS .....</b>	<b>5</b>
1.1 REPLACING ELECTRONIC BOARDS.....	5
1.2 REPLACING THE HUMIDITY SENSOR.....	6
1.3 REPLACING THE FOOD CORE TEMPERATURE PROBE.....	7
1.4 REPLACING THE TEMPERATURE PROBE OF ELECTRIC STEAM GENERATOR.....	7
1.5 REPLACING THE TEMPERATURE PROBE OF GAS STEAM GENERATOR.....	8
1.6 REPLACING THE AMBIANT TEMPERATURE PROBE.....	8
<b>2. SPECIFIC TOOLS .....</b>	<b>9</b>
<b>3. SETTINGS .....</b>	<b>10</b>
3.1 PIN CODES .....	10
3.2 SOFTWARE INITIALIZATION .....	10
3.3 SETTING THE SOFTWARE LANGUAGE .....	10
3.4 WATER TREATMENT CAPACITY .....	11
3.5 CHECKING SOFTWARE VERSION.....	11
3.6 UPDATING THE SOFTWARE .....	11
3.7 PROBES CALIBRATION.....	13
3.8 PARAMETERS SCREEN .....	14
<b>4. PREVENTIVE MAINTENANCE.....</b>	<b>16</b>
4.1 LIST OF ACTIONS .....	16
4.2 SETTING MAINTENANCE INTERVENTION FREQUENCY, DAILY USAGE RATE.....	18
<b>5. TROUBLESHOOTING .....</b>	<b>20</b>
5.1 TROUBLESHOOTING METHOD .....	20
5.2 ERRORS MESSAGES .....	20
5.3 MAINTENANCE SCREENS .....	26
5.4 COMMUNICATIONS LEDS .....	29
5.5 OTHER SYMPTOMS.....	33
5.6 FLOWCHART .....	35
5.7 RESET.....	39
<b>6. ELECTRIC DIAGRAMS .....</b>	<b>41</b>
6.1 DIAGRAMS.....	41
6.2 6 AND 10 LEVEL CAVITY VENTILATION.....	47
6.3 GREASE COLLECTION OPTION .....	48
6.4 PARTS LIST .....	49
<b>7. HYDRAULIC DIAGRAM.....</b>	<b>51</b>
7.1 6 AND 10 LEVEL OVENS.....	51
<b>8. GAS DIAGRAM .....</b>	<b>53</b>
8.1 6 AND 10 LEVEL OVENS.....	53
<b>9. ACCESS TO COMPONENTS .....</b>	<b>54</b>
9.1 LOCATION OF TECHNICAL COMPONENTS.....	54
9.2 ACCESS TO COMPONENTS .....	54
<b>10. COMPONENTS .....</b>	<b>57</b>
10.1 ELECTRONIC BOARDS.....	57
10.2 ELECTRIC BOARDS.....	61
10.3 OTHER COMPONENTS.....	62
<b>11. RECOMMENDED AND EMERGENCY SPARE PARTS .....</b>	<b>64</b>
<b>12. COMBUSTION GAS ANALYSIS PROCEDURE .....</b>	<b>66</b>
<b>13. CONTROL OF THE ELECTRODES (GAS BURNER).....</b>	<b>68</b>
<b>14. CHANGING THE EQUIPMENT FROM ONE GAS TO ANOTHER .....</b>	<b>69</b>
14.1 GAS FLOW RATES AND POWERS.....	69

14.2	CHART OF GAS INJECTORS.....	69
14.3	CHANGEOVER FROM ONE GAS TO ANOTHER: .....	69
14.4	CHANGING/ADJUSTING GAS VALVE .....	71
<b>15.</b>	<b>CONVERSION TABLE.....</b>	<b>72</b>
15.1	PT100 PROBE.....	72
15.2	CELSIUS / FAHRENHEIT TEMPERATURE.....	73
15.3	WATER HARDNESS.....	73
15.4	PRESSURE .....	73

## 1. THE ESSENTIALS













### 1.1 REPLACING ELECTRONIC BOARDS

When replacing the electronic boards (Aag gas board, Ahu humidity board, Ar Main board or Ac encoder board), no additional updates or settings are required. Simply follow these steps:

- » Remove the faulty board.
- » Install new card in its place.
- » Make necessary connections.
- 🔧 On start-up, the system will automatically set up the new card

However, to replace the Ai interface card, it is essential to recover the SD card from the faulty card. This makes it easier to set parameters and recover customer settings and data. Follow these steps:

- » Remove faulty interface card.
- » Remove SD card from the interface card.
- » Insert this SD card into interface card.
- » Install new interface card.
- » Make necessary connections.
- 🔧 When it starts up, the system will ask you to confirm that the parameters have been copied and will automatically configure the card.

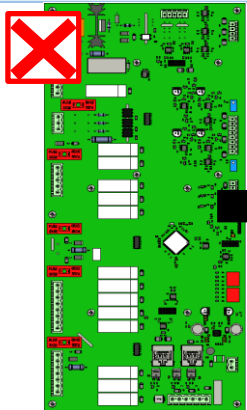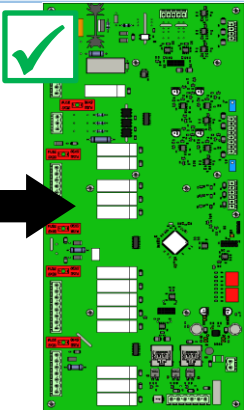Boards	Faulty board	New board	Application
Main board - Ar			No settings - Automatic recognition between cards
Humidity board - Ahu			No settings - Automatic recognition between cards
Gas board - Aag			No settings - Automatic recognition between cards
Encoder board - Ac			No settings - Automatic recognition between cards
Interface board - Ai			Recover the SD card and insert it on the new Interface card. Copy settings and customer data if the SD card present on the faulty card is recovered.
			 

## 1.1.1 INTERFACE BOARD SETTING

This step is crucial if the interface card on your Chef'sCombi oven is to be replaced. There are two methods available for carrying out this operation: you can either copy the existing configuration using the SD card from the faulty interface card, or you can configure the oven manually. Be sure to follow the instructions carefully to ensure correct configuration.



It is in your interest to recover the SD card, as all customer data, history, logs, settings and oven configuration will be preserved.



SD card: Mini 4GB / FAT32 formatted

### Replace the SD card on the faulty interface card.

- » When replacing interface card, make sure you recover the SD card present on it.
- » Insert this SD card into the new interface board.
- » Start oven.
  - ⓘ Important, When the oven starts up, the system will detect that there is no configuration and will offer to copy the configuration.
  - » If you accept to copy the configuration, the oven will be configured with the previously saved settings.
  - » If you refuse, or if the SD card is corrupted, you will have to configure the oven manually by following the instructions ([▶ Troubleshooting : Reset](#)).

### Insert a blank SD card into the Interface card

- » If you do not have the original SD card or if it is damaged, you can use the blank SD card present on the new Interface (check that it is present).
- » Start oven.
  - ⓘ When it starts up, the system will detect that there is no configuration and will ask you to configure the oven.
  - » Configure the oven manually by following the instructions ([▶ Troubleshooting : Reset](#)).

## 1.2 REPLACING THE HUMIDITY SENSOR

Prepare your intervention:

- ✓ Remove the left-hand oven cover ([▶ Access to components](#))
- ✓ Tools: 22" spanner

Disconnecting the probe



- » Disconnect the probe at the Black terminal block by pressing on the terminal block tab

Removing the probe

- » Unscrew the probe using the spanner
- » Remove the probe


Fitting the new probe

- » Reposition and screw the probe fully into its housing, taking care not to twist or damage the cable
- » Connect the probe to the black terminal block, taking care to follow the instructions below.

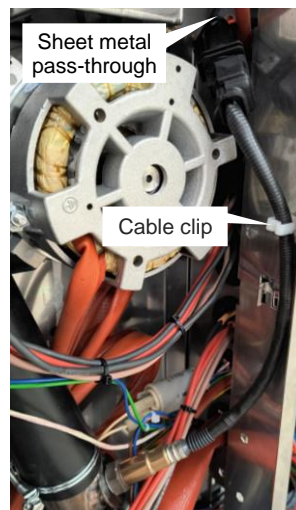

When connecting the new probe to the humidity card, make sure that :

- » The cable is as straight as possible (no loops)
- » The cable is not twisted
- » The cable has passed through the cable clip provided.
- » The cable is routed through the highest grommet on the board to avoid twisting the cable

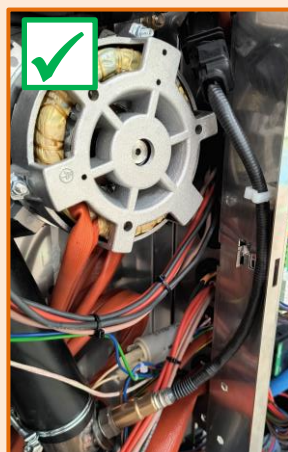



### 1.3 REPLACING THE FOOD CORE TEMPERATURE PROBE

Prepare your intervention:

- ✓ Remove the right-hand ladder from the cooking chamber (► [Access to components](#))
- ✓ Tools: Wrenches, screwdriver

Disconnecting the probe


- » Unscrew the 2 fixing screws (8 wrench) from the core probe pass-through and remove the 2 screws.
- » Gently pull on the lead wire to access and release the connector.
- » Disconnect the 2 wires from the connector.
- » Remove the probe and its gasket.

Mounting the new probe

- » Connect the probe to the connector and insert the connector into its housing.
- » Position the gasket and attach the probe pass-through to the cooking cavity.

Check / Test

- » Perform the probe calibration procedure.



### 1.4 REPLACING THE TEMPERATURE PROBE OF ELECTRIC STEAM GENERATOR



Locate the probe wires on the terminal block according to color. Red wire: analog, White wire: numeric.



It is imperative to systematically change the probe seals each time the probe is serviced (replacement or inspection).



It is imperative to systematically change the immersion element seal when servicing the immersion element.

Prepare your intervention:

- ✓ Remove the left-hand oven panel (► [Access to components](#) - Left-hand side panel)
- ✓ Drain the steam generator (► [Troubleshooting](#) - Maintenance screens - Hydraulics diagram)
- ✓ Tools: Wrenches, screwdriver

Probe disconnection

- » Disconnect the wires from the terminal block on the Main board.

Removing the immersion element

- » Unscrew the 3 flange nuts on the immersion heater fitted with the temperature probe.
- » Remove the immersion element.

Removing the probe

- » Unscrew and remove the clamp holding the probe to the immersion element.
- » Unscrew the probe and remove it.

Mounting the new probe






- » Position the new probe on the immersion element according to the instructions.
  - Insert the cable gland and the two seals on the temperature probe.
  - Insert the temperature probe into the immersion element housing, leaving it protruding by 0.4 inch, then tighten the cable gland.
  - Secure the probe to the top bar with a metal Serflex clamp at 0.2 inch from the end of the probe.

Mounting the immersion element

- » Insert the immersion element into the steam generator not forgetting to change the gasket.

Check / Test

- » Perform the probe calibration procedure.

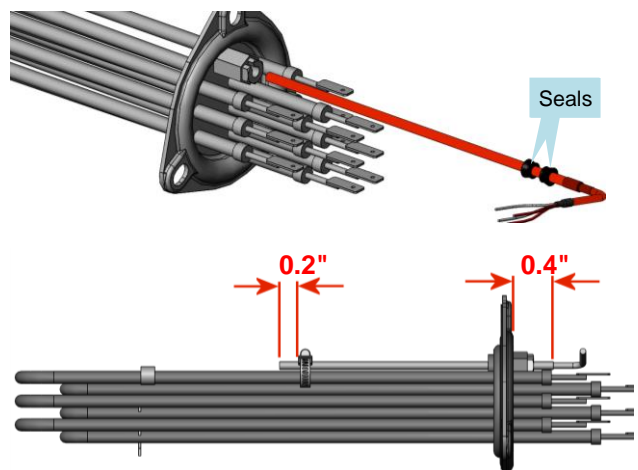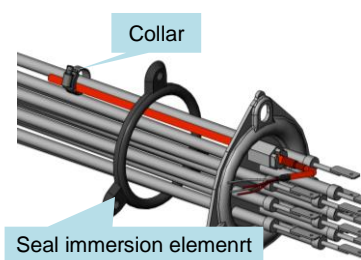

## 1.5 REPLACING THE TEMPERATURE PROBE OF GAS STEAM GENERATOR



Locate the probe wires on the terminal block according to color. Red wire: analog, White wire: numeric.



It is imperative to systematically change the probe seals each time the probe is serviced (replacement or inspection).

Prepare your intervention:

- ✓ Remove the left-hand oven panel (► [Access to components](#) - Left-hand side panel)
- ✓ Drain the steam generator (► [Troubleshooting](#) - Maintenance screens - Hydraulics diagram)
- ✓ Tools: Wrenches, screwdriver

Probe disconnection

- » Disconnect the wires from the terminal block on the Main board.

Removing the probe





- » Unscrew the collar holding the probe to the gas steam generator.
- » Remove the probe and the two seals and replace them.

Mounting the new probe

- » Position the new probe in the steam generator according to the instructions
  - Insert the 2 seals on the temperature probe as far as they will go.
  - Insert the probe into the steam generator and tighten with a screw clamp.

Check / Test

- » Perform the probe calibration procedure.

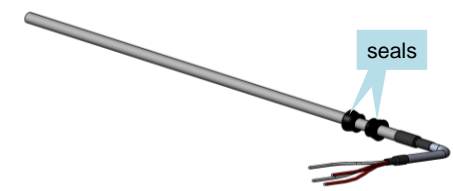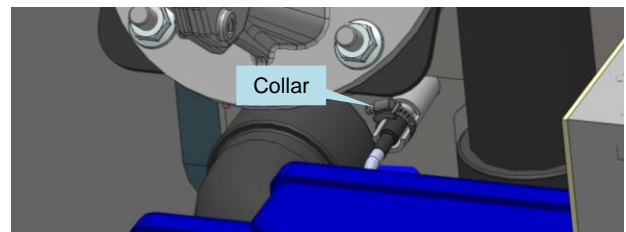

## 1.6 REPLACING THE AMBIANT TEMPERATURE PROBE



It is imperative to systematically change the probe seal each time the probe is serviced (replacement or inspection).

Prepare your intervention:

- ✓ Remove the left-hand oven panel (► [Access to components](#) - Left-hand side panel)
- ✓ Remove the left-hand runner from the oven (► [Access to components](#) - Runners)
- ✓ Remove the ventilation duct (► [Access to components](#) - Ventilation duct)
- ✓ Tools: Wrenches, screwdriver

Probe disconnection

- » Disconnect the wires from the terminal block on the Main board.

Removing the probe






- » In the technical compartment, unscrew the threaded hexagonal spacer (14 mm spanner) used to secure the probe.
- » Remove the probe and its seal from the inside of the oven.

Mounting the new probe

- » Lubricate and assemble the O-ring with the ambient probe
- » Pass the wires of the new probe through from the inside of the oven.
- » Position and secure the new probe.
- » Insert and press the probe against the inside of the cooking cavity and secure it with the threaded hexagonal spacer.
- » Reconnect the probe wires to the terminal block on the Main board

Check / Test

- » Perform the probe calibration procedure.

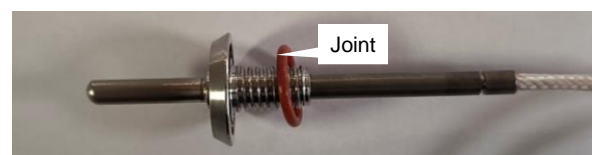



## 2. SPECIFIC TOOLS

Chapter	Tools	Characteristics	Application
<b>Common</b>	Standard hand tool kit		
	Cutting tools	Retractable blade knife	
	Set of metric wrenches (flat, pipe, ratchet with sockets, BTR)	From 5.5 to 22 mm	
	Set of screwdrivers (flat, Phillips)	Philips.	
	Pliers (multi-socket, flat, cutting, stripping)		
	Measuring tools (tape measure, calliper, level)	Classic tubular level 40cm	
	Wrench		
	PPE	Standard	Personal protection for technicians.
<b>Water</b>	Water control kit	Allows control of Hardness, Cl-, PH, Conductivity and Cl2	Check the characteristics of the water.
	Water pressure gauge	Measuring range 0-10 bar	Check water supply pressure.
<b>Drain</b>	Container	3 litres minimum	Fill the drain box.
<b>Electric</b>	Verification of absence of voltage (VAT)	Max 690V a.c.	Check that there is no voltage.
	Multimeter-Voltmeter	Max 690V a.c.	Various checks on electrical and electronic components.
	Draw knife	Type : "JOKARI" No 50 and No 28	Pull out the power cable.
	Torque spanner	Type : J208-50 + 13mm 3/8" square socket	Motor mounting: Torque 14N/m.
<b>Gas</b>	Flue gas analyser	Type : "Testo 300 professionnel or equivalent	Check the level of CO emitted when the oven is operating.
	Water column or electronic pressure gauge	Type :Testo 510 or equivalent	Check the gas pressure.
	Spray or Electronic Gas Leak Detector	Type : 1000 Bubbles spray	Check gas connection for leaks.
	Thickness gauges	Dimensions: 6mm and 3.5mm	Position the ignition and detection electrodes.
	Ratchet spanner	Size 8mm M5 screw	Remove the gas exchanger.
	Claw key	Opening 1/2-3/4	Dismantle the gas hoses and connections if the grease collection option is chosen.
<b>Software</b>	USB flash drive	USB2 type: Maximum capacity = 32 GB - FAT32 formatted	Updating software version, copying oven configuration data and customer data (protocols, images, etc.).
<b>Mécanical</b>	Hub puller	Type : "Facom U35.L or similar pulling tool.	Remove the convection fan to service the motor.


### 3. SETTINGS

#### 3.1 PIN CODES

The access PIN codes are essential for entering the settings menu reserved for the installer, user (after setting by the Chef) and maintenance. They ensure the security and protection of the sensitive settings of your Chef'sCombi oven. Please keep these codes in a safe place and only share them with authorised personnel.


Code No	Description	Level	Remark
<b>0000</b>	Default user code	1	Accessible in the settings / Can be changed by the user.
<b>CHEF</b>	Emergency code for Chef	1	If the password set by the Chef (user) is forgotten (after changing 0000).
<b>INST</b>	Installers	5	Access to installer parameters
<b>SERV</b>	Network Service Technicians	7	Access to 1st level maintenance parameters

#### 3.2 SOFTWARE INITIALIZATION

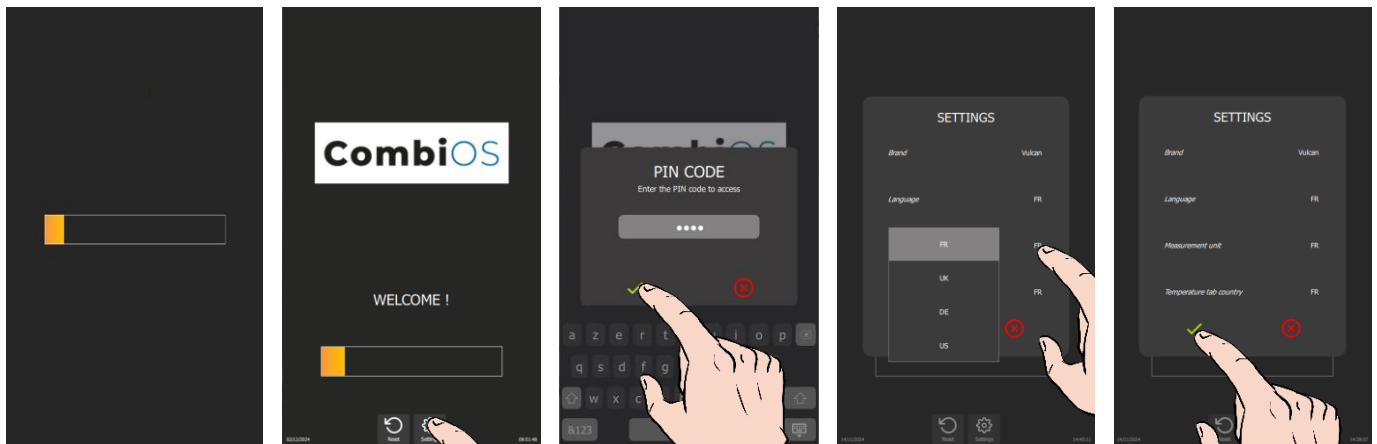

- » Switch on the display by holding down the encoder button.
- » Before the power-on bar graph is displayed, press the « Settings » button.
  - ⓘ The PIN code identification pop-up appears.
- » Enter PIN code "INST" to access "Installer" parameters.
- » Confirm by pressing the « ✓ » icon. If the code is correct, access to the screen is authorized; otherwise, return to PIN code entry.
- » Press on the parameter values to modify if necessary.
  - ⓘ The selection drop-down menu appears.
    - Select the desired value.
- » Confirm by pressing the « ✓ » icon.

#### 3.3 SETTING THE SOFTWARE LANGUAGE

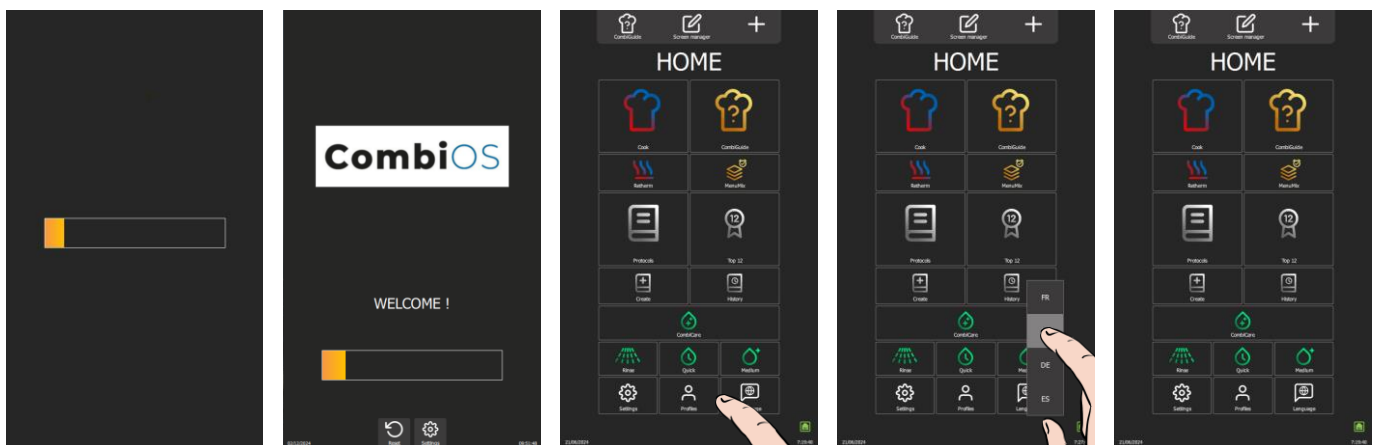

- » Switch on the display by holding down the encoder button until the power-on bar graph is displayed.
- » Wait for the "Home" menu to appear.
- » Press the "Languages" button.
  - ⓘ The language selection drop-down menu appears.
- » Select the desired language (En: by example).

### 3.4 WATER TREATMENT CAPACITY


This counter is only applicable when the oven is supplied by two separate water networks.



- » From the "Home" menu screen, select the "Settings" button.
- » The screen displays the "Parameters" menu with the "User" tab selected.
- » Select "Cooking and Installation choices" button.
- » The screen displays the "Cooking and Installation" settings.
- » Enter the capacity of the water treatment system in litres. Adjustable from 0 to 99999L. The value defaults to 0 if there is no dedicated water treatment for the oven.
  - Select the area of the value to be modified.
  - Set the value using the encoder knob or the keypad.
- » Confirm by pressing "✓" icon.
- » Reset the counter if necessary, by pressing the "Reset" button.
- » Confirm by pressing "✓" icon.

### 3.5 CHECKING SOFTWARE VERSION

The software version is visible in the "User" tab of the "Settings" screen, below the device serial number.

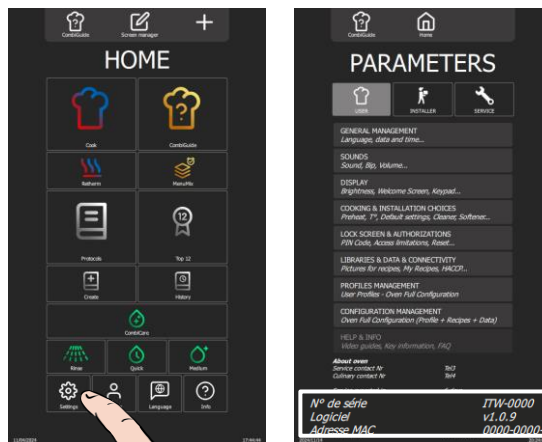

- » From the "Home" menu screen, select the "Parameters" button.
- » The screen displays the "Parameters" menu with the "User" tab selected.

### 3.6 UPDATING THE SOFTWARE

A regular software update ensures that the oven interface has the latest developments and improvements for use by the customer and/or the technician. The technician is alerted as soon as a new update is available via the "Vulcanequipment.com/resource-center" website software and/or the "software info" distribution.

Before starting the update, check that the software is in the local language and change if necessary.

**Warning:**

Do not disconnect the power supply to the device while the software is being loaded.

**Do not remove the UBS key while the software is being loaded.**

The oven will be unavailable for the duration of this operation.

#### USB key

For this configuration operation, you will need a blank FastPad USB key or a blank USB key with the following specifications:

- Maximum capacity = 32 Gb
- Formatted in FAT32 (default allocation unit size = 4096 bytes) or formatted in FAT (default allocation unit size = 32 Kilobytes).


### Software update file

Download the software update file "CVxxx-SW.zip" from our Vulcan website maintenance site.


Unzip the downloaded file.

Copy the executable file to the blank USB key and run it: fastpad3\_imxX\_VX.X.XX.upd

The files will be automatically created on the USB key. The USB key must contain only :

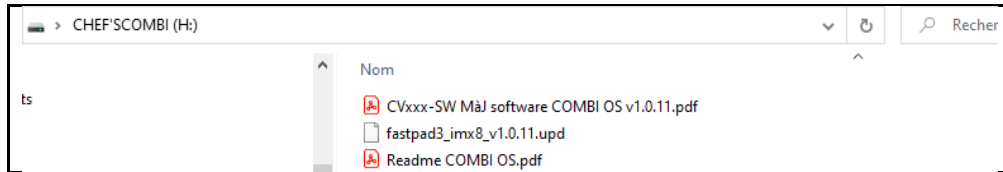

### Procedure

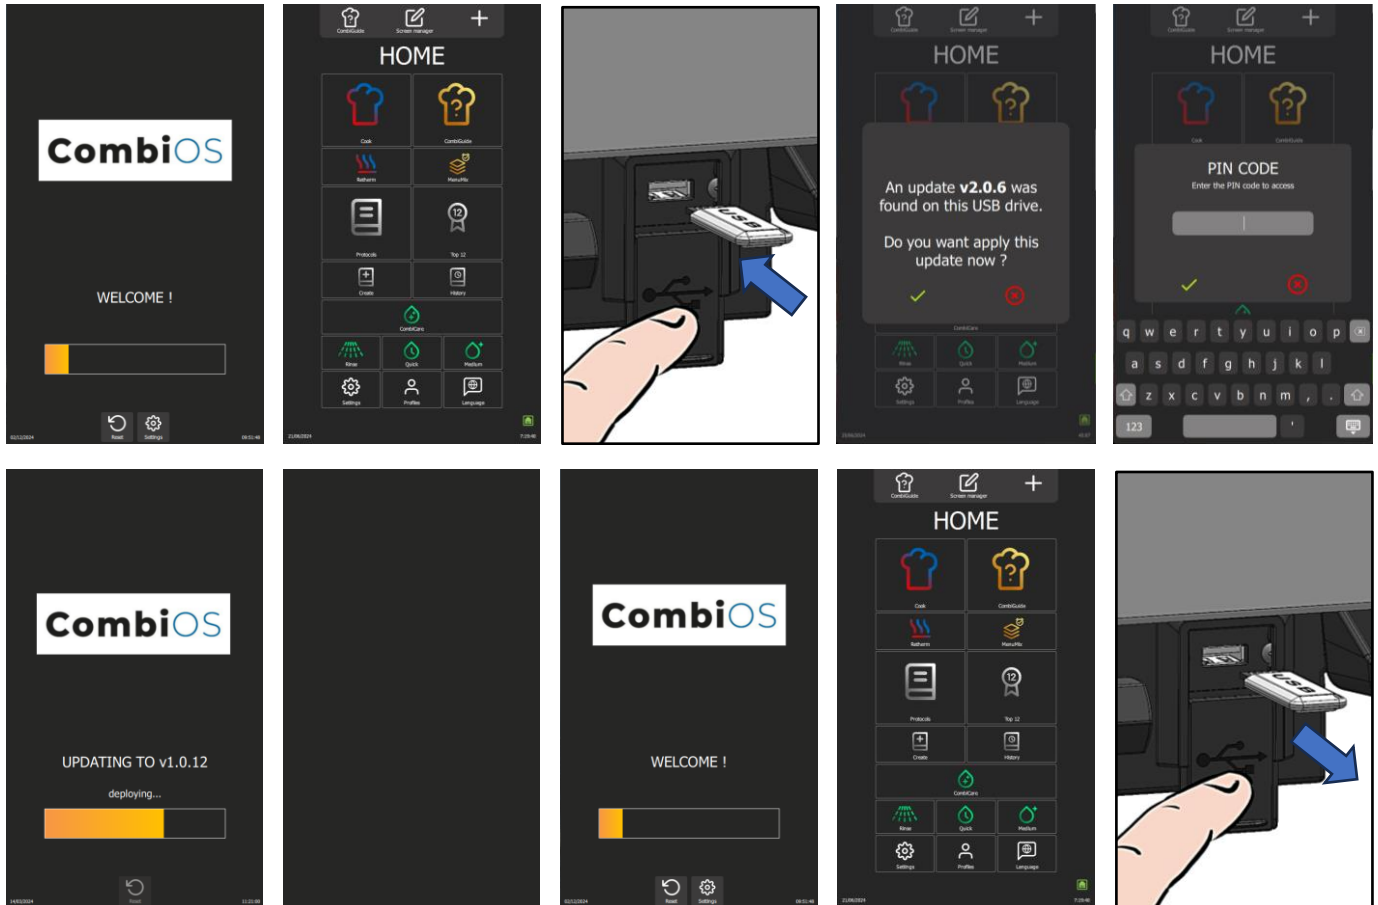

- Step 1 Switch on the device.  
Wait for welcome menu to appear. If necessary, skip the pre-heating.
- Step 2 Insert USB key with the new version of Software into the USB socket (next to the spray hose location).  
The USB socket has a protective cover.  
Lift the cover upwards to insert the USB key.



#### Caution !

Verify flap has closed as soon as USB socket is no longer in use.


- Step 3 When the USB key is connected, the "UPDATE" request window will appear.  
*If no window appears, this means software version is identical between the USB key and the device.*
- Step 4 Confirm the update by pressing the « ✓ » icon.
- Step 5 Confirm the update by entering your PIN code (► [PIN Codes](#)).  
Software will start loading.  
*The device may restart once during the update.*
- Step 5 Do not remove the USB key until the welcome screen appears.

### 3.7 PROBES CALIBRATION



Calibration of the probes (core probe, steam generator probe and cavity probe) must be carried out **systematically** each time these components are replaced.

The cavity probe, core probe and humidity sensor are calibrated during the 'boiler calibration' procedure, which takes approximately 12 minutes. If a measured value is inconsistent during the process, interrupt the check immediately by pressing the 'Reject' button. Then switch off the oven and check the probe(s) concerned. Replace faulty components if necessary.

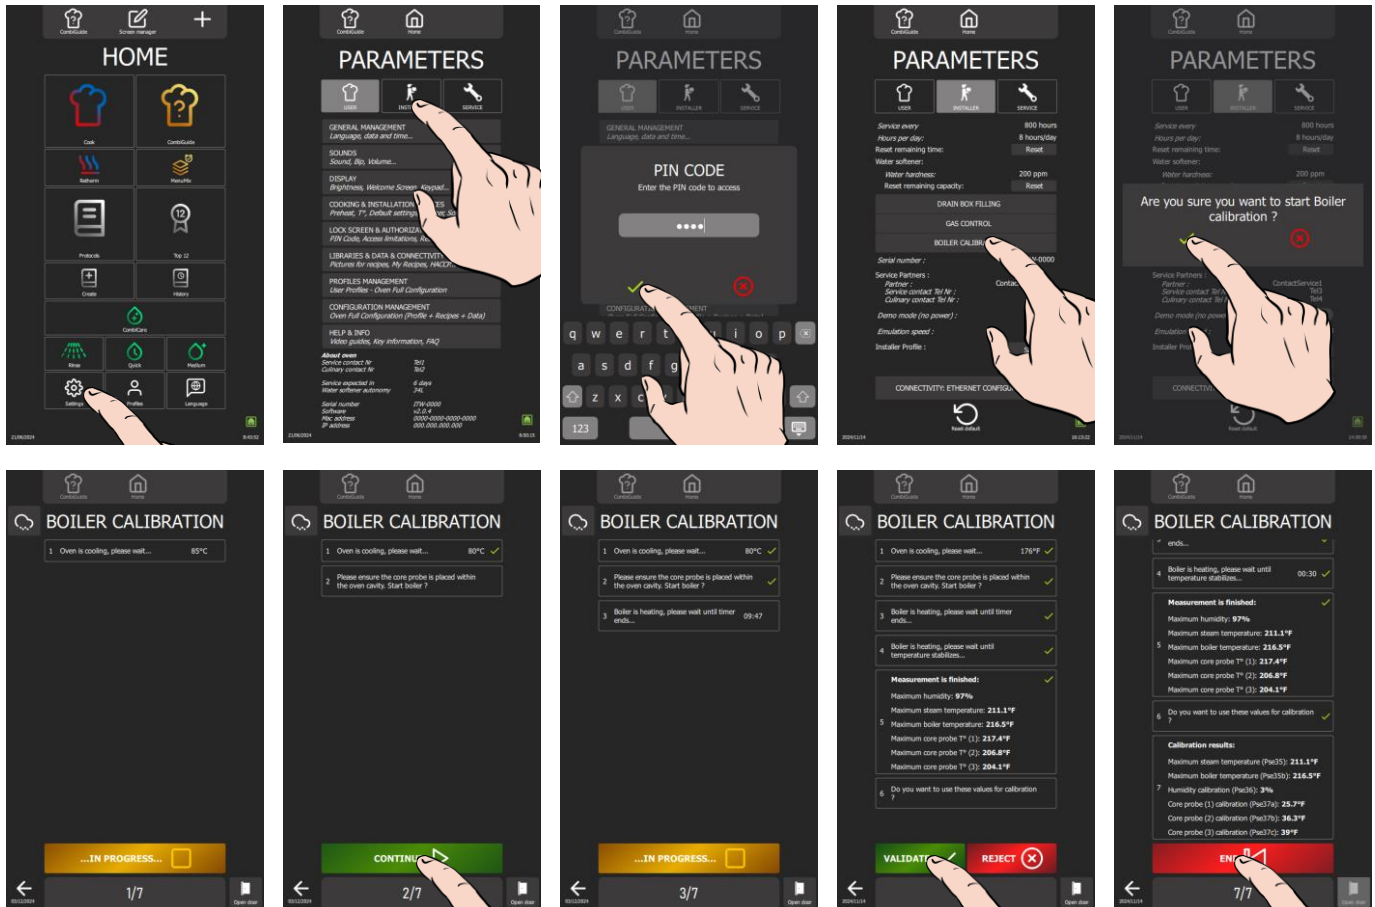


Prepare for your test:

- ✓ The oven door is closed.
- ✓ The left-hand trim panel is in place.
- » From the "Home" menu screen, select the "Settings" button.
- » The screen displays the "Parameters" menu with the "User" tab selected.
- » Select the "Installer" tab.
- » The PIN code identification pop-up appears.
- » Enter the PIN code to access the "Installer" parameters. (► [PIN Codes](#)).
- » Confirm by pressing the "✓" icon. If the code is correct, access to the screen is authorised; if not, return to entering the PIN code.
- » Press the "Boiler calibration" button
- » Confirm by pressing the "✓" icon.
- » The "Boiler calibration" screen appears.
- » Start the test by pressing the "Start" button.
- » Follow the actions shown on the oven display "step by step".
- » When point 5 "Do you want to use these values for calibration?" is displayed, press "✓" to confirm.
- » When the calibration result is displayed, press the "End" icon to return to the previous screen.

### 3.8 PARAMETERS SCREEN


For security reasons, the "Installer" and "Service" tabs are password-protected. You can permanently adjust your device's factory settings by pressing the value of the parameter you want to change or activate. Once settings have been made, the parameters are adjusted immediately.

#### 3.8.1 ACCESSING THE SERVICE SETTINGS MENU

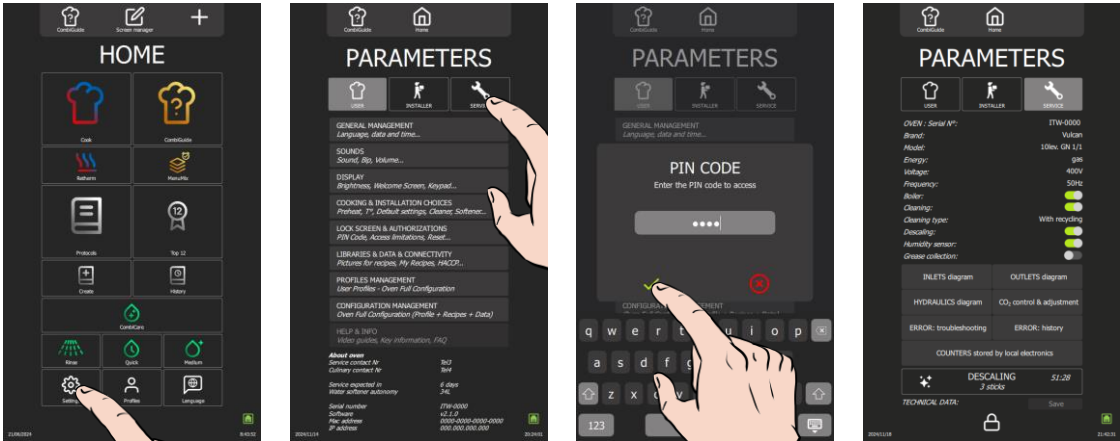

- » On the "Home" menu screen, select the "Parameters" button.
- » The screen displays "Parameters" menu with "User" tab selected.
- » Select "Service" tab.
- » The PIN code identification pop-up appears.
- » Enter PIN code to access "Service" parameters (► [PIN Codes](#)).
- » Validate by pressing « ✓ » icon. If the code is correct, access to the screen is authorised; otherwise, return to entering the PIN code.

#### 3.8.2 LIST OF PARAMETERS

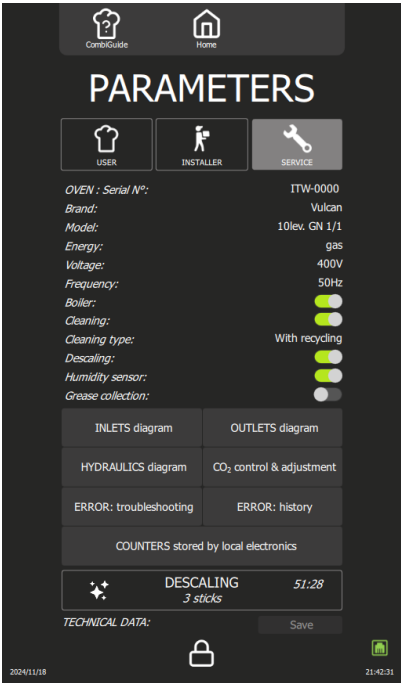

- » Oven serial number
- » Oven settings
- » Maintenance diagrams
- » Errors
- » Counters
- » Descaling the steam generator
- » Save maintenance history: Button active if a USB key is connected to the oven

#### 3.8.3 TROUBLESHOOTING ACCESS

**Service screens: [Input status screen](#), [Output status screens](#) and [Hydraulics screen](#).**  
(► [Troubleshooting](#) : [Maintenance diagrams](#))

##### Error : Troubleshooting

The screen displays the error table, starting with the first number listed in the error table (► [Operating faults](#)). To scroll through the numbers, use the encoder to scroll to the desired number.  
Alternatively, you can click on the number field to bring up the keypad and enter the desired target number directly.  
You can access this screen by selecting an error line in the error history (► [Error: History](#)). When browsing the history, click on the specific error to be automatically redirected to this screen. This feature enables efficient incident management, providing quick access to specific error details.



### Error : History

The Error History screen provides a detailed view of incidents that have occurred, presented in chronological order from most recent to oldest. This feature enables users to follow and understand the evolution of problems encountered by the Chef'sCombi. Error messages are recorded in the history for a set period of 6 months; ensuring reliable tracking of incidents over an extended period.

### Counters

The counter screen lists all the counters, with a history for the main counters. Following values for main counters, you will find the following values:

- The total value since the oven was switched on.
- Values for the last 7 days (D, D-1, D-2, D-3... D-7).
- Values for the last 12 months (M, M-1, M-2, M-3... M-12).

Note: Some counters can only display the current day's value, with no history of previous days.

#### List of counters

Designation	Units
Total operating time	Seconds
Cooking time convection mode	Seconds
Cooking time steam mode	Seconds
Cooking time combi mode	Seconds
Total time in cooking cycle	Seconds
Total time in cleaning cycle	Seconds
Hard water consumption	Millilitre
Softened water consumption	Millilitre
Elec. energy consumption	0.1Wmin
Gas energy consumption	0.1Wmin
Water consumption since last reset	Litre
Remaining water capacity	Litre
Hours elapsed since last service	Hours
Remaining hours before service	Hours
Cooking seconds elapsed since last cleaning	Seconds
Cleaning status	-
Number of completed cooking cycles	-
Number of completed cleaning cycles	-
Number of completed descaling cycles	-
Total operating time	Seconds
Cooking time convection mode	Seconds
Cooking time steam mode	Seconds
Cooking time combi mode	Seconds
Total time in cooking cycle	Seconds
Total time in cleaning cycle	Seconds
Hard water consumption	Litre
Softened water consumption	Litre
Elec. energy consumption	KWh
Gas energy consumption	KWh
Elec. energy consumption last cycle	KWh
Gas energy consumption last cycle	KWh
Water consumption last cycle	Litre
Duration last cycle	Seconds
Elec. energy consumption per cycle	KWh
Gas energy consumption per cycle	KWh
Water consumption per cycle	Litre
Average duration per cycle	Seconds
Elec. energy consumption last hour	KWh
Gas energy consumption last hour	KWh
Water consumption last hour	Litre
Average duration last hour	Seconds
Elec. energy consumption per hour	KWh
Gas energy consumption per hour	KWh
Water consumption per hour	Litre
Average duration per hour	Seconds
Total cleaning tabs consumption	-
Total descaling sticks consumption	-

Designation	Units
S01 CAVITY LIGHT (MOS)	-
S02 DAMPER (MOS)	-
S03 GREASE PUMP (MOS)	-
S04 DESCALING PUMP (RELAY)	-
S05 CAVITY DRAIN PUMP (RELAY)	-
S06 STEAM GENERATOR DRAIN PUMP (RELAY)	-
S08 TECH FAN (RELAY)	-
S09 KP (RELAY)	-
S10 POWER HEAT 1 (RELAY)	-
S11 POWER HEAT 2 (RELAY)	-
S12 POWER HEAT G (RELAY)	-
S13 CLEAN PUMP (RELAY)	-
S15 SPRAY VALVE (RELAY)	-
S16 DESCALER DISSOLUTION VALVE (RELAY)	-
S18 CONDENSER VALVE (OPTO)	-
S19 COOLING VALVE (OPTO)	-
S20 STEAM GENERATOR FILLING VALVE (OPTO)	-
S22 FAN OPERATION (TRIAC)	-
S23 FAN DIRECTION (RELAY)	-
SR1 COOKING STATE (RELAY)	-
S01 CAVITY LIGHT (MOS)	Seconds
S02 DAMPER (MOS)	Seconds
S03 GREASE PUMP (MOS)	Seconds
S04 DESCALING PUMP (RELAY)	Seconds
S05 CAVITY DRAIN PUMP (RELAY)	Seconds
S06 STEAM GENERATOR DRAIN PUMP (RELAY)	Seconds
S08 TECH FAN (RELAY)	Seconds
S09 KP (RELAY)	Seconds
S10 POWER HEAT 1 (RELAY)	Seconds
S11 POWER HEAT 2 (RELAY)	Seconds
S12 POWER HEAT G (RELAY)	Seconds
S13 CLEAN PUMP (RELAY)	Seconds
S15 SPRAY VALVE (RELAY)	Seconds
S16 DESCALER DISSOLUTION VALVE (RELAY)	Seconds
S18 CONDENSER VALVE (OPTO)	Seconds
S19 COOLING VALVE (OPTO)	Seconds
S20 STEAM GENERATOR FILLING VALVE (OPTO)	Seconds
S22 FAN OPERATION (TRIAC)	Seconds
S23 FAN DIRECTION (RELAY)	Seconds
SR1 COOKING STATE (RELAY)	Seconds

### Descaling

Descaling enables the oven and steam generator to be descaled by force. Pressing the button starts a descaling process at the maximum level for the oven without the cleaning program. The number of sticks required is clearly indicated and varies according to the oven model. The descaling process is similar to that used for a wash with descaling and is carried out automatically.

### Save

The save function automatically exports all the oven's essential parameters and data to a USB stick, organising them in different files for more efficient management. Each type of data is saved in a separate file, including connectivity logs, errors, counters, cooking parameters and appliance configuration. These files are automatically filed in a specific folder, created on the USB key, guaranteeing a complete and organised backup of maintenance data.

The function is accessible if a USB stick is plugged into the USB socket.

## 4. PREVENTIVE MAINTENANCE

To ensure that your equipment operates safely and reliably over the long term, we recommend that you have it checked and serviced by our qualified personnel.

The customer is automatically notified of the need for preventive maintenance. The overhaul counter is determined according to the frequency of use of the oven and the number of hours between each intervention. These values must be entered by the technician at the time of installation and checked at each service.

### 4.1 LIST OF ACTIONS




**WARNING :** he appliance must be disconnected from its power supply during cleaning or maintenance, and when replacing parts.

Subject	Recommendations (Every year or every 3000h)
<b>General</b>	
Earthing	Check the continuity of the earthing system
Oven position	Levelling, loading sill height, adjust if necessary.
Fixing the oven	If the appliance is fixed, check that it is correctly fixed.
<b>Facia / Screen</b>	
Control panel sealing	Check that the control panel is watertight. If there are any leaks, make it watertight
Screen electronics / Interface board	No traces of dirt or dust deposits on the components - Clean and seal the compartment. - Check that the screen is securely fastened to the bracket, as this ensures that it is watertight.
Screen connections	No traces of oxidation on the USB / RJ45 plug connectors - Replace if necessary.
Encoder card	No signs of dripping or oxidation - Check that it is working properly.
Encoder button	Check that it is in good condition and securely fixed, with no excessive play or wear, etc. - Replace if necessary.
<b>USB compartment / Spray hose</b>	
USB compartment	Check the condition of the USB socket: no deformation, no oxidation, check the closing flap, good general condition, closing spring working, compartment completely sealed - Replace if necessary.
Spray hose	Check the condition of the spray hose: no blockages, no leaks - dismantle and clean - Check the supply pipe: no leaks, no cracks in the pipe - Check the reel: secure and return spring in good working order - Replace if necessary.
<b>Technical compartment</b>	
Air vents / technical fan	Clean the inlets - Clean the fan blades
Power supply terminals	Check that there are no signs of overheating - Tighten the connections
Fuse holders (if any)	Check that there are no signs of overheating - Tighten the connections
Contactors	Check that there are no signs of overheating - Tighten the connections
Main board	Remove dust - Check that there is no oxidation on the output contacts - Check the condition of the fuses (visual check of the status LEDs) - Check that the connector screws are tight and that they are correctly connected.
Valve In	Check the general tightness - Check the seal - Clean - Using the maintenance table, operate and check that there is no noise, Depending on the model, check the operation of the associated motor, noise, etc. - Replace if necessary.
<b>Heater</b>	
Ventilation motor	Using the maintenance table, operate the motor and check that there are no abnormal noises - Systematically replace the motor shaft seal - Check that the mechanical fasteners are tight - Lubricate the motor shaft (high-temperature lubricant).
Resistors	Check the condition of the supply wiring, cables in good condition, no cracks in the insulation. Heat-shrink tubing present and in good condition. - Repair or replace if necessary.
Intensity measurement (convection heat 180°C)	Measure the current on each phase of each heating element and check that there is no imbalance between phases and no drift from one test to the next. - Replace the element if necessary.
<b>Gas or electric steam generator</b>	
Steam generator body	Descale if necessary (remove at least one immersion heater for visual inspection) - Replace the seal - Check that there are no traces of dripping at the hydraulic connections.
Immersion heaters	Dismantle only if leaking - Replace seal - Check condition of wiring and heat-shrink tubing - Repair or replace if necessary.
Intensity measurement (100°C steam heater)	Measure the current on each phase of each heating element and check that there is no imbalance between phases and no drift from one test to the next. - Replace the element if necessary.
Level probe	Dismantle and clean - Check that the connections (probe and earth) are tight and that the thread is watertight.
<b>Hydraulic</b>	
General waterproofing	Carry out a visual check.
Water inlet	Cleaning the filter.
Solenoid valves	Check that there is no indication of overheating in the coils (change of colour if necessary) - Check operation using the maintenance menu, leave the solenoid valves operating and check the various circuits, seals, tightness of connections, etc. - Re-seal or replace the hoses if necessary, and the solenoid valves if necessary.
Washing / descaling circuit	Check the condition of the descaling box: that the descaling flap is working properly, and that the grille is clean and in good condition - clean if necessary. Check the condition of the pipework: connections, hoses, no leaks. Check the pump: using the maintenance menu, turn it over and check that there are no abnormal noises, no leaks, and that the electrical connections are free from gap or oxidation. Replace if necessary. Check that there are no foreign bodies in the tank.
Steam generator drain circuit	Check the condition of the pipework: connections, hoses, no leaks.

	Check the pump: using the maintenance menu, turn it over and check that there are no abnormal noises, no leaks, and that the electrical connections are free from gap or oxidation. Check for leaks or replace the pump if necessary.
Wash box drain circuit	Check the condition of the pipework: connections, hoses, no leaks. Check the pump: using the maintenance menu, turn it over and check that there are no abnormal noises, no leaks, and that the electrical connections are free from gap or oxidation. Check for leaks or replace the pump if necessary.
<b>Cavity</b>	
General condition	Check that there are no rust stains and that cleaning and descaling are effective.
Joint	Clean - Check general condition - Replace if necessary.
Core probe	Check the general condition (tip, cable) - Check that the bulkhead feed-through is tight and watertight - Check that it is working properly by starting a firing and checking the temperature change.
20-level oven ventilation duct	Check that the lower axle ring is present and that it functions correctly (pivoting; hooking in).
Sprinkler	From the maintenance menu, activate the wash pump and visually check the water flow - Clean the nozzles and retighten if necessary.
Water injection tube	Internal cleaning - Descaling if necessary - Changing the seal if necessary - Mechanical fastening.
Drain	Check that the grille is clean, tight and watertight. Change the seal if necessary.
Under-door trunking	Check the drain and flue for leaks and cleanliness - Re-seal if necessary.
Ladders	Check that there is no corrosion and that the fixings and rails are in good condition. - Repair if necessary.
<b>Door</b>	
Top and bottom hinges	Check general condition (wear, etc.); Lubricate and tighten if necessary.
Internal door	Condition and presence of the door stops (complete if necessary); Check that the springs are correctly pivoted and effective (adjust if necessary).
Lighting	General operation - Condition of label (must be watertight) - Clean - Replace if necessary
Door closing mechanism	Check clearances and general tightness - Check the state of wear of friction parts - Readjust if necessary.
Bottom door seal (20 levels only)	Clean and check general condition - Replace if necessary.
<b>Gas ovens only</b>	
Gas connection	If the connection is made with a flexible hose, check its suitability for use (date, condition, etc.) - Replace if necessary
Gas pressure	Check the "static" and "dynamic" pressures at the appliance inlet - Adjust if necessary.
Combustion	Refer to the installation manual to carry out this check.
Exchangers	Visually check the general condition and tightness of the flanges in relation to the technical compartment - Check the fixing points.
Ignition control / Flame safety / Burner motor speed	Carry out the checks suggested by the technical screen in the maintenance menu before any dismantling - Observe the results and, if necessary, follow the appropriate procedure.
Tightness of the gas circuit	Using a product such as "Mille Bulles", check the tightness of the connections upstream of the gas valves and downstream of each connection when the burner is operating.
Safety checks	Switch off the gas supply while the burner is operating - The burner must go into safety mode
Plastic fireplaces	Check their presence and condition and clean if necessary.
Gas valves	Check: tightening of electrical control retaining screws, condition of metal hoses, tightness of connections, etc. - Readjust in accordance with the instructions in this manual - Replace if necessary.
Burner motor	Check during operation that there are no abnormal noises - Replace if necessary.
<b>Grease collection option</b>	
Grease pump	Check the general condition, in particular that there are no leaks or drips, and that the electrical connections are in good condition: no overheating, no traces of oxidation, etc. Using the maintenance menu, run the motor and check that there are no noises - Replace if necessary.
Circuit	Check the condition of the pipes: no leaks, no cracks, no brittleness, no deformation or blockages. - Replace defective parts if necessary.
Valve	Check general condition: no excessive gap at the handle, tightness of connections. - Replace if necessary.
Safety valve	Check that it is working: close the grease outlet valve and activate the pump, the valve will discharge the liquid - If not, replace the valve.
Safety pressure switch	Check that it is working: close the grease outlet valve and activate the pump. The pump should stop and an error message should appear on the display. If this is not the case, replace the pressure switch.

## 4.2 SETTING MAINTENANCE INTERVENTION FREQUENCY, DAILY USAGE RATE

### Access to the Installer parameters menu

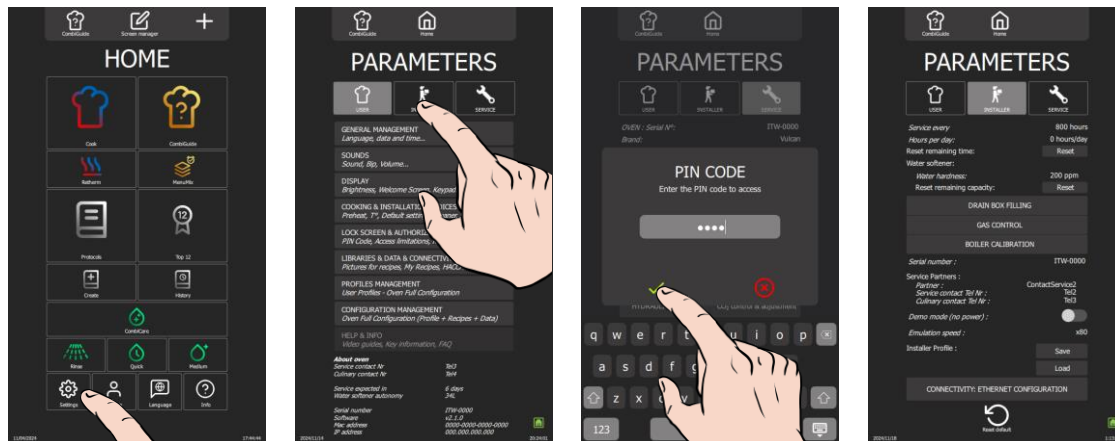

- » From the "Home" menu screen, select the "Settings" button.
- » The screen displays the "Parameters" menu with the "User" tab selected.
- » Select the "Installer" tab.
- » The PIN code identification pop-up appears.
- » Enter PIN code to access the "Installer" (► PIN Codes).
- » Confirm by pressing "✓" icon. If the code is correct, access to the screen is authorised; if not, return to entering the PIN code.


### Frequency of maintenance work and rate of use per day

The frequency of maintenance interventions and the rate of use per day are calculated in the table below according to the information supplied by the customer at the time of installation, such as the number of hours the appliance is used per day and the type of cooking performed. It is the responsibility of the technician to check that these settings correspond to the actual use of the oven, and to modify them if necessary (according to the table below):


Type of use (Customer information)	Hours of use / day (Customer information)		Setting the installation parameters (to be entered in the Installation parameters)	
			Maintenance every (in hours)	Maintenance every (in hours)
<b>NORMAL USE</b> (Restaurants, etc.)	LIGHT	< 7 h	2000	6
	STANDARD	7-12 h	3000	8
	INTENSIVE	12-17 h	3000	16
	VERY INTENSIVE	17-24 h	3000	24
<b>COOKING &gt;428°F</b> and/or <b>COOKING FATTY</b> <b>PRODUCTS</b> (e.g. chicken rotisserie)	STANDARD	< 7 h	3000	8
	INTENSIVE	7-12 h	3000	16
	VERY INTENSIVE	12-17 h	3000	24
		17-24 h		

\* hours of use


#### Frequency of maintenance

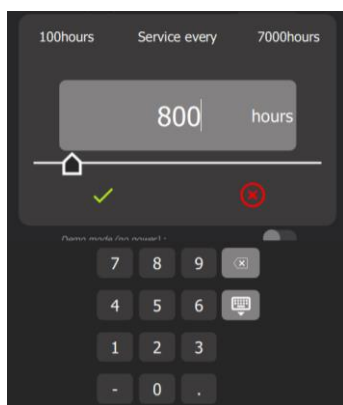

#### Number of hours / day

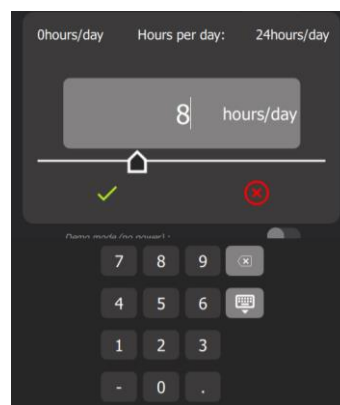

- » Press number of days input box.
- » The screen displays a keypad and the number entry field.
- » Enter number of hours before the next maintenance (800h by default): Adjustable from 100 to 7000 hours. It's essential that you plan to have your appliance serviced at least once a year.
  - Select the area of the value to be modified.
  - Set the value using the encoder knob or the keypad.
- » Confirm by pressing "✓" icon.
- » Select box to enter number of hours of use per day.

- »  The screen displays a keypad and the number entry field.
- » Enter average hours appliance is in use each day. NOTE: This can be adjusted from 0 to 24 hours.
  - Select area of the value to be modified.
  - Set value using the encoder knob or the keypad.
- » Confirm by pressing "✓" icon.

*Resetting the counter*

- » Reset the counter
  - Press the "Reset" button.
- » Confirm by pressing "✓" icon.

## 5. TROUBLESHOOTING

### 5.1 TROUBLESHOOTING METHOD



Before replacing components without being certain of the problem, it is important to use all the tools supplied with the oven to target the real problem: error history, counters, error message and associated solutions, test using the technical screens, check the status of the LEDS, etc...

1. **Interview the customer:**
  - Collect as much information as possible from the user about the problems encountered (frequency, anomalies, blocking errors, etc.).
2. **Identify the problem:**
  - Check combi steamer is correctly supplied with electricity or gas, water and drain, depending on the type of model used.
  - Visually inspect interior of the oven for signs of possible damage or obstructions.
  - Check the indications potentially provided by the Chef'sCombi: the error history, counters, ... may give indications of the type of problem encountered, its frequency ....
  - Write down the details of the problem encountered, for better understanding.
3. **If an error message is displayed: Fault search with ERROR MESSAGE**
  - Follow instructions given in the error message.
  - Refer to error table in this manual if necessary for further information on the specific error code encountered (► [Errors messages](#)).
4. **If no error message is displayed:**
  - Fault-finding via the maintenance screens
    - ❖ Check different components via the maintenance screens of outlets, inlets and hydraulics in the maintenance parameters of the oven interface (► [Maintenance screens](#)).
    - ❖ Refer to this manual to understand their meaning.
    - ❖ Write down any anomalies and proceed with troubleshooting.
  - Fault-finding via communication LEDS
    - ❖ Identify LEDS on the oven boards (► [Communications LEDS](#)).
    - ❖ Refer to the LED guide to understand their meaning (► [Communications LEDS](#)).
    - ❖ Proceed with troubleshooting.
  - Fault-finding OTHER:
    - ❖ Consult the manual to access available diagnostics (► [Other symptoms](#)).
    - ❖ Follow the flow charts provided to diagnose the problem and identify the appropriate troubleshooting steps (► [Flow charts](#)).
    - ❖ Consult the electrical diagrams (► [Electric diagrams](#)).
5. **Contact technical support if necessary:**
  - If the problem persists or if you are unable to solve the problem using the above steps, contact the manufacturer's technical support.
  - Give all the relevant information you have collected during diagnosis for effective assistance.

### 5.2 ERRORS MESSAGES

Code	Title	Propable Causes	What to do?
E00	Cavity overheat greater than 626°F	Control contacts stuck.	POWER OFF: Use an ohmmeter to check the continuity between the input and output of contactor Kr. Replace one or both of the bonded contacts.
		Output S10 of the Main board permanently activated.	POWER OFF: Use an ohmmeter to check the continuity between the terminal "230Vac" of connector J15 and the output "S10" of connector J16 of the Main board. If there is continuity, replace the Main board.
		Output S11 of the Main board permanently activated (gas ovens only).	POWER OFF: Use an ohmmeter to check the continuity between the terminal "230Vac" of connector J15 and the output "S10" of connector J16 of the Main board. If there is continuity, replace the Main board.
		To reset this fault, the power supply to the oven must be cut off by disconnecting the associated protection circuit breaker.	
E01	Ambient probe cavity fault.	Check fault on the "Technical screen".	Open "Technical Screen" page and check the temperature being indicated by the ambient temperature probe "Ban". If the value is "---", the probe circuit is faulty (either short-circuited or open).
		Wire broken in probe or input connection "Ban".	Disconnect probe Pt100 "Ban" from the connector J2 of the Main board and take a measurement between the 2 white wires using an ohmmeter; If the circuit is broken, repair the connection. If not, replace the probe.
		Short circuit in the probe or probe input connection "Ban".	If there is a short-circuit repair the connection. Otherwise change the probe.
		Main board electrical fault.	If the probe and the connections are functioning, replace the Main board.
To reset this fault, the power supply to the oven must be cut off by disconnecting the associated protection circuit breaker.			
E02	Ambient probe cavity fault.	Check fault on the "Technical screen".	Open "Technical Screen" page and check the temperature being indicated by the ambient temperature probe "Baa". If the value is "---", the probe circuit is faulty (either short-circuited or open).
		Wire broken in probe or input connection "Baa".	Disconnect probe Pt100 "Baa" from the connector J2 of the Main board and take a measurement between the 2 red wires using an ohmmeter; If the circuit is broken, repair the connection. If not, replace the probe.



		Short circuit in the probe or probe input connection "Baa".	If there is a short-circuit repair the connection. Otherwise change the probe.
		Main board electrical fault.	If the probe and the connections are functioning, replace the Main board.
	<i>To reset this fault, the power supply to the oven must be cut off by disconnecting the associated protection circuit breaker.</i>		
<b>E10</b>	Steam generator scale.		
<b>E11</b>	High level of steam generator scale.		
<b>E12</b>	Steam generator overheat greater than 266°F.	The steam generator is heating; however, the water level is low: The water level controller is faulty.	Check the functionality of the water level control "BnC" on the "Technical Screen" page: => If the control probe is immersed in water, BnC = 1 => If the control probe is not in water, BnC = 0. If not functioning, check the state (Presence of calcium; Mineral fouling...).
		Steam generator heats even though water level is too low: Sensor connection short-circuited or grounded.	Disconnect the connector J1 on the Main board and take a reading between the terminals "BnC" and "EARTH" using an ohmmeter; If there is a short circuit, locate the fault and repair as required.
		The steam generator is heating; however the water level is low: Input "BnC" at the Main board is defective.	Replace the Main board.
<b>E13</b>	Steam generator temperature probe fault	Check fault on the "Technical screen".	Open the "Technical Screen" page and check the temperature being indicated by the ambient temperature sensor "Bgn". If the value is "---", the sensor circuit is faulty (either short-circuited or open)
		Wire broken in probe or input connection "Bgn".	Disconnect the probe Pt100 "Bgn" from the connector J2 of the Main board and take a measurement between the 2 white wires using an ohmmeter; If the circuit is broken, repair the connection. If not, replace the probe.
		Short circuit in the probe or probe input connection "Bgn".	If there is a short-circuit repair the connection. Otherwise change the probe.
		Main board electrical fault.	If the probe and the connections are functioning, replace the Main board.
<b>E14</b>	Steam generator temperature probe fault.	Check fault on the "Technical screen".	
		Wire broken in probe or input connection "Bga".	Disconnect probe PT100 "Bga" from J2 connector on PLC board. Measure between the two white wires using ohmmeter. If circuit is broken, repair connection. If not, replace probe. If the circuit is broken, repair the connection. If not, replace the probe.
		Short circuit in the probe or probe input connection "Bga".	If there is a short-circuit repair the connection. Otherwise change the probe.
		Main board electrical fault.	If the probe and the connections are functioning, replace Main board.
<b>E15</b>	The level of water in the steam generator has not been reached after 117 seconds.	Water supply closed.	Verify water supply in-line valves are open.
		Water pressure too low.	Verify water pressure at the oven connection. When the water supply to the oven is maximum, the pressure must be greater than 1.5 bar.
		Steam generator is not being fed water: The fuse "F1" of the Main board has blown.	Disconnect the water inlet and put the hose into a receptacle to collect any water. Open "Technical Screen" page. Select "Yrc" to activate the output "S20" on PLC board for 1 min. If the solenoid fill valve on the steam generator, "Yrc", doesn't open, inspect Fuse "F1". If fuse is blown, check condenser and solenoid valves (Yc) and (Yr) operation. Perform needed repairs and replace fuse with one of same type.
		Steam generator is not being supplied water: The output "S20" of the Main board is faulty.	Press button "Yrc" on the "Technical Screen" and measure the voltage between the output "S20" of the Main board and terminal "Xb". If the voltage is less than 230V, change the Main board. WARNING: The output is controlled by a triac: a voltage at the output can be measured even if the triac is not open.
		Steam generator is not being supplied water: Then steam generator fill solenoid valve is defective.	Select "Yrc" on the "Technical Screen". If the steam generator fill solenoid valve "Yrc" does not open, replace the solenoid valve.
		Water flow rate too low.	Select "Yrc" on the "Technical Screen" and let water flow into the receptacle whilst keeping the solenoid valve open (1 min). Measure the volume of water collected. This should be approximately 5 litres. If less than 5 litres, check the state of the steam generator fill solenoid valve filters and flow limiter (fouling...). Clean as required.
		Steam generator water level control failure.	Check the functionality of the water level control "BnC" on the technical control screen. If water is detected, BnC = 1. If the probe is not in water, BnC = 0. If not functioning, check the probe state (Presence of calcium; Mineral fouling...) and its electrical connection. If the probe is functioning correctly, change the Main board.
<b>E16</b>	Steam generator drainage pump fault.	24/230Vac supply voltage input fault.	With a voltmeter, check the supply voltage between input 24/230Vac of the Main board and terminal "Xb". This voltage should be 230V (120V on ovens version "UL"). If not, find the cause of the fault and repair as required.

		Fuse F4 blown.	Check the state of the fuse LED F4; If lit, check the state of fuse F4. If it is blown, find the cause (Check the state of the descaling pump (Mdg) and the cavity drainage pump (Mvm)). Repair by replacing the fuse with the same model.
		Fault with the Main board switch S06.	Connect a voltmeter between the terminal S06 of the Main board and terminal Xb. Activate relay output S06 from the technical control screen. If the voltage reads zero when the relay is operated, replace the Main board.
		The drainage pump is not powered.	Connect a voltmeter to the terminals of the steam generator drain pump (Mvg). Activate relay output S06 from the technical control screen. If the voltage reads zero when the relay is operated, check the pump cabling and repair as required.
		Steam generator drainage pump defective or blocked.	Activate relay output S06 from the technical control screen. If the pump does not function, visually check its state: clean or swap out as required.
		Steam generator water level control failure.	Check the functionality of the water level control "BnC" on the technical control screen. If water is detected, BnC = 1 if the probe is not in water, BnC = 0. If not functioning, check the probe state (Presence of calcium; Mineral fouling...) and its electrical connection. If the probe is functioning correctly, change the Main board.
<b>E20</b>	The level of water in the cleaning tank has not been reached after 50 seconds.	Water supply closed.	Open water supply
		Water pressure too low.	Check water pressure at the oven connection. During maximum kitchen water use, the pressure must be greater than 1.5 bar.
		Water flow rate too low.	Check state of the filter and of the condenser flow limiting solenoid valve (Fouling...). Clean if required. The water flow rate should be approximately 5l/min.
		Fuse F1 blown.	Check state of the fuse LED F1; If lit, check the state of fuse F1. If it is blown, find the cause (Check state of the solenoid valves Yr and Yrc). Repair by replacing the fuse with the same model.
		Fault with the Main board output S18.	Connect a voltmeter between the terminal S18 of the Main board and terminal Xb. Activate relay output S18 from the technical control screen. If the voltage is zero when the output is activated, replace the Main board. WARNING: The output is controlled by a triac: a voltage can be read at the output, even when the triac is not open.
		The condenser solenoid valve (Yc) is not powered.	Connect a voltmeter to the terminals of the condenser solenoid valve (Yc). Activate relay output S18 from the technical control screen. If the voltage reads zero when the output is operated, check the solenoid valve cabling and repair as required.
		Condenser solenoid valve defective.	Activate output S18 from the technical control screen. If the solenoid valve does not function, then replace.
		Self clean cleaning box water level control failure.	Check the functionality of the water level control of the cleaning tank "BnL" on the technical control screen. If water is detected, BnL = 1; if the probe is not in water, BnL = 0. If not functioning, check the probe state (Presence of calcium; Mineral fouling...) and its electrical connection. If the probe is functioning correctly, change Main board.
<b>E21</b>	Self cleaning tank drainage pump fault.	24/230Vac supply voltage input fault.	With a voltmeter, check the supply voltage between input 24/230Vac of the Main board and terminal "Xb". This voltage should be 230V (120V on ovens version "UL"). If not, find the cause of the fault and repair as required.
		Fuse F4 blown.	Check state of the fuse LED F4; If lit, check the state of fuse F4. If it is blown, find the cause (Check the state of the descaling pump (Mdg) and the cavity drainage pump (Mvm)). Repair by replacing the fuse with the same model.
		Fault with the Main board switch S05.	Connect a voltmeter between the terminal S05 of the Main board and terminal Xb. Activate relay output S05 from the technical control screen. If the voltage reads zero when the relay is operated, replace the Main board.
		The drainage pump is not powered.	Connect a voltmeter to the terminals of the Cavity drain pump (Mvm). Activate relay output S05 from the technical control screen. If the voltage reads zero when the relay is operated, check the pump cabling and repair as required.
		Cleaning tank drainage pump defective or blocked.	Activate relay output S05 from the technical control screen. If the pump does not function, visually check its state: clean or swap out as required.
		Self clean wash box water level control failure.	Check functionality of the water level control of the cleaning tank "BnL" on the technical control screen. If water is detected, BnL = 1; if the probe is not in water, BnL = 0. If not functioning, check the probe state (Presence of calcium; Mineral fouling...) and its electrical connection. If the probe is functioning correctly, change Main board.
<b>E22</b>	Descaling pump cartridge fault.	24/230Vac supply voltage input fault.	With a voltmeter, check the supply voltage between input 24/230Vac of the Main board and terminal "Xb". This voltage should be 230V (120V on ovens version "UL"). If not, find the cause of the fault and repair as required.
		Fuse F4 blown.	Check state of the fuse LED F4; If lit, check the state of fuse F4. If it is blown, find the cause (Check the state of the steam generator drainage pump (Mvg) and the cavity drainage pump (Mvm)). Repair by replacing the fuse with the same model.

		Fault with the Main board switch S04.	Connect a voltmeter between the terminal S04 of the Main board and terminal Xb. Activate relay output S05 from the technical control screen. If the voltage reads zero when the relay is operated, replace the Main board.
		The descale pump is not powered.	Connect a voltmeter to the terminals of the descaling pump (Mdg). Activate relay output S04 from the technical control screen. If the voltage reads zero when the relay is operated, check the pump cabling and repair as required.
		Descaling tank drainage pump defective or blocked.	Activate relay output S04 from the technical control screen. If the pump does not function, visually check its state: clean or swap out as required.
		Steam generator water level control failure.	Check functionality of the water level control on the technical control screen. If water is detected, BnC = 1; if the probe is not in water, BnC = 0. If not functioning, check the probe state (Presence of calcium; Mineral fouling...) and its electrical connection. If the probe is functioning correctly, change Main board.
<b>E30</b>	Unpricked Core probe or Failed Core Probe.	Check fault on the "Technical screen".	Open "Technical Screen" page and check the temperature being indicated by the food probe "Bsc". If the value is "----" at all points, the common point of the probe (Bsc com) is faulty (either short-circuited or open).
		Wire broken in probe or input connection Bsc Com.	Disconnect probe Pt100 from the Main board and take readings using an ohmmeter between points Bsc com and Bsc1, Bsc2 and Bsc3; If the circuit is broken, repair the connection. If not, replace probe.
		Short circuit in the probe or probe input connection Bsc Com.	Disconnect probe Pt100 from the Main board and take readings using an ohmmeter between points Bsc com and Bsc1, Bsc2 and Bsc3; If there is a short circuit, locate the fault and repair as required. If not, replace probe.
		Main board electrical fault.	If the probe and the connections are functioning, replace Main board.
<b>E31</b>	Food probe degraded.	Check fault on the "Technical screen".	Open "Technical Screen" page and check the temperature being indicated by the food probe "Bsc". If one of the values is "----", this point of the probe (Bsc1 => Bsc3) is faulty (either short-circuited or open).
		Wire broken in probe or the input connections Bsc 1 to 3.	Disconnect probe Pt100 from the Main board and take readings using an ohmmeter between points Bsc com and Bsc1, Bsc2 and Bsc3; If one of the test points is broken, repair the connection. If not, replace the probe.
		Short circuit in the probe or one of the probe input connections Bsc 1 to 3.	Disconnect the probe Pt100 from the Main board and take readings using an ohmmeter between points Bsc com and Bsc1, Bsc2 and Bsc3; If one of the test points has short circuited, repair the connection. If not, replace the probe.
		Main board electrical fault.	If the probe is functioning, replace the Main board.
<b>E32</b>	Food probe not inserted.		
<b>E34</b>	USB Core Probe unpricked or out of service.	The probe is detected at the USB port but temperature is not being measured.	Open "Technical Screen" page and check the temperature being indicated by the food probe "USB". If the value is "----" at all points, the probe is defective. Replace probe.
<b>E35</b>	USB food probe degraded.	One or more of the measured temperatures are out of range.	Open "Technical Screen" page and check the temperature being indicated by the food probe "USB". If the value is "----" at one of the measuring points, the probe is defective. Replace the probe.
<b>E40</b>	Gas safety device active on "convection" cavity burner.	Gas inlet valve closed - no gas - Incorrect gas type.	Check the of gas in the network -Check that the type of gas being supplied conforms with that shown on the appliance's specification plate- Open the gas valve.
		Gas pressure too low.	Check the gas pressure at the appliance connection when all appliances running off the same supply are operating at maximum capacity. The gas pressure must be within the allowed limits.
		Gas board output AL12 defective.	If not, adjust the gas pressure or increase the capacity of the gas supply (Expansion valve, pipe diameter).
		Gas board output AL12 defective.	Connect a voltmeter between the terminal AL12 of the add-on gas board (Aag) and terminal Xb. Activate relay output AL12 from the technical control screen. If the voltage reads zero when the relay is operated, replace the add-on gas board.
		The igniter is not powered.	Connect a voltmeter to the terminals of the "convection" burner igniter. Activate relay output AL12 from the technical control screen. If the voltage reads zero when the relay is operated, check the igniter cabling and repair as required.
		The igniter is defective.	Activate output relay AL12 from the technical control screen. If the igniter does not function, then replace.
		Incorrect setting of flame control electrode.	Check the state and position of the flame controller electrodes.
		The gas add-on board (Aag) is not receiving the flame lit signal at PF1 (or PF2).	Connect a voltmeter between PF1 (or PF2 in the case of oven 20N) and Xb. When the burner is functioning, the voltage must be 230V. If not, check the flame control box cabling and repair or replace as required.
<b>E41</b>	Gas safety device active on steam generator burner.	Gas inlet valve closed - no gas - Incorrect gas type.	Check the of gas in the facility - Verify type of gas being supplied conforms with that shown on the appliance's specification plate- Open the gas valve.
		Gas pressure too low.	Check the gas pressure at the appliance connection when all appliances running off the same supply are operating at maximum capacity. The gas pressure must be within the allowed limits. If not, adjust the gas pressure or increase the capacity of the gas supply (Expansion valve, pipe diameter).

		Gas board AL3 output defective.	Connect a voltmeter between the terminal AL3 of the add-on gas board (Aag) and terminal Xb. Operate the output relay AL3 from the technical control screen. If the voltage reads zero when the relay is operated, replace the add-on gas board.
		The igniter is not powered.	Connect a voltmeter to the terminals of the steam generator burner ignier. Operate the output relay AL3 from the technical control screen. If the voltage reads zero when the relay is operated, check the igniter cabling and repair as required.
		The igniter is defective.	Activate relay output AL3 from the technical control screen. If the steam generator burner igniter does not function, then replace.
		Incorrect setting of flame control electrode.	Verify state and position of the flame controller electrodes.
		The gas add-on board (Aag) is not receiving the flame lit signal at PF3.	Connect a voltmeter between PF3 et Xb. Whilst the burner is functioning, the voltage must be 230V. If not, check the flame control box cabling and repair or replace as required.
		Input "PF3" of the gas add-on board is defective.	Change add-on gas board (Aag).
<b>E50</b>	Humidity sensor faulty.	"Humidity" add-on board (Ahu) is not powered.	Check the flashing of the communication LED "green" and "orange" on the board, If they do not flash, use a voltmeter to check that the board is powered (Set to DC current). This must be +24Vdc.
		"Humidity" add-on board (Ahu) is not communicating with the Main board.	Check the flashing of the communication LED "green" and "orange" on the board. If they do not flash, change the add-on board.
		Humidity sensor is defective.	Replace the probe (► <a href="#">The essentials</a> - Replacing the Humidity sensor).
<b>E60</b>	Convection fan not functioning.	If it exists, the fuse "Ftmv" is blown.	Check the state of the fuse Ftmv and change if required.
		The fuse F3 of the Main board has blown.	Check fuse F3 on the Main board. If it is blown, find the cause and replace with fuse of the same value.
		The fuse Fm of the Main board has blown.	Check fuse Fm on the Main board. If it is blown, find the cause and replace with a fuse of the same value.
		The fan motor thermal protection is open.	POWER OFF, check the continuity of the circuit between the terminal A2 of the connector Kp and terminal Xb. If the circuit is broken, check the cabling or change the motor.
		Contactor Kp is not powered.	Connect a voltmeter between the terminals A1 and A2 of the main contactor Kp. Activate relay output Kp from the technical control screen. If the voltage reads zero when the relay is operated, check the Kp cabling or replace the Main board.
		Contactor Kp is defective.	Connect a voltmeter between the terminals A1 and A2 of the main contactor Kp. Operate the output switch Kp from the technical control screen. If the main switch Kp does not close when powered, replace the switch.
		The motor is not powered.	Connect a voltmeter between the terminals Xm1 and Xm0. Operate the output switch Kp from the technical control screen. If the voltage is not between 208V et 240V, inspect the cabling.
		Motor circuit cut.	POWER OFF, check the continuity of the circuit between the outputs S22 and S23 of the Main board and the terminal Xm0. If the circuit is open, check the cabling or change the fan motor.
		Short-circuited Triac motor.	POWER OFF, measure the continuity between the terminals E21 and S22 of the Main board. If they are short-circuited, change the Main board.
		<i>To reset this fault, the power supply to the oven must be cut off by disconnecting the associated protection circuit breaker.</i>	
<b>E70</b>	Electronics overheat: temp. greater than or equal to 149°F.		
<b>E71</b>	Electronics overheat: temp. greater than or equal to 158°F.	Ambient temperature around oven too high; Extract hot air.	Check the installation and keep away from appliances such as open burners, hot plates.
		Air inlets require cleaning.	Clean the cool air intake vents.
		Cooling fan requires cleaning.	Clean the cooling fan.
		The fuse F3 of the Main board has blown.	Check the fuse F3 on the Main board. If it is blown, find the cause and replace with fuse of the same value.
		The output S08 of the Main board is defective.	Connect a voltmeter between the terminal S08 de la Main board et une terminal Xb. Activate relay output S08 from the technical control screen. If there is no voltage, replace the Main board.
		The cooling fan is not powered.	Connect a voltmeter between the terminal ventilator power supply. Activate relay output S08 from the technical control screen. If the voltage reads zero, inspect the cabling.
		The cooling fan is defective.	Activate relay output S08 from the technical control screen. If the fan does not turn, then replace.
<b>E72</b>	Electronics overheat: temp. greater than or equal to 167°F.	Ambient temperature around oven too high; Extract hot air.	Check installation and keep away from hot appliances.
		Air inlets require cleaning.	Clean the cool air intake vents.
		Technical fan requires cleaning.	Clean the cooling fan.
		The fuse F3 of the Main board has blown.	Check the fuse F3 on the Main board. If it is blown, find the cause and replace it with a fuse of the same value.
		The output S08 of the Main board is defective.	Connect a voltmeter between the terminal S08 on the Main board et terminal Xb. Activate relay output S08 from the technical control screen. If there is no voltage, replace the Main board.
		Cooling fan is not powered.	Connect a voltmeter between the power supply terminal of the cooling fan. Activate relay output S08 from the technical control screen. If no voltage, check wiring.

		Cooling fan is defective.	Activate relay output S08 from the technical control screen. If the fan does not turn, then replace it.
<b>E80</b>	Communication fault between boards.		
<b>E81</b>	Break in communication between circuit boards.	Degraded communications cable.	Test a new communication cable.
		Defective Main boards.	Check Main boards and replat it needed.
	<i>To reset this fault, the power supply to the oven must be cut off by disconnecting the associated protection circuit breaker.</i>		
<b>E82</b>	SD Card fault.		
<b>E83</b>	Cloud error.	Service configuration contains an error.	Ensure serial number, code number, cloud URL are correct.
		Cloud server is offline.	Ignore the error until cloud server is back online.
<b>E90</b>	Steam generator fault (E11,12,13,14,15) during cycle.	E11,12,13,14,15 fault appeared and remained for more than 3 minutes, triggering the TWIN CONTROL and automatically switching to Convection mode.	Check error history to identify the original error and potential causes.
<b>E91</b>	Steam generator fault (E11,12,13,14,15) during cleaning.	E11,12,13,14,15 fault appeared and remained for more than 3 minutes, triggering the TWIN CONTROL and removing the steam phases.	Check error history to identify the original error and potential causes.
<b>E92</b>	Humidity sensor fault (E50).	E11,12,13,14,15 fault appeared and remained for more than 3 minutes, triggering the TWIN CONTROL and removing the steam phases.	Check error history to identify the original error and potential causes.
<b>E93</b>	Core probe fault (E30, E34).	A fault E130, E34 appeared and remained for more than 3 minutes, triggering the TWIN CONTROL and removing the steam phases.	Check error history to identify the original error and potential causes.
<b>E94</b>	Fault preventing washing.	A fault E00, 02, 14, 60, 81 appeared and remained for more than 3 minutes, triggering TWIN CONTROL and cancelling the wash sequence.	Check error history to identify the original error and potential causes.
<b>I98</b>	Started with Remaining Water Treatment Capacity at 0.		Carry out or arrange for maintenance of the water treatment system.
<b>I99</b>	Started with Number of days before service < 0.		Contact the technical department to arrange preventive maintenance.
<b>i100</b>	Gas Control: Speed control of a gas fan done successfully.	During preventive maintenance or any other operation requiring this check, it has been carried out successfully, the fan speed in ignition mode does not exceed +/- 20% of the setpoint value on average.	No intervention.
<b>E101</b>	Gas Control: Speed control of a gas fan, with speed drift/ speed issue.	During preventive maintenance or any other operation requiring this control, the fan speed in ignition mode exceeds +/- 20% of the setpoint value on average.	Check rotating motor, no suspicious noises, replace gas board.
<b>E102</b>	Gas Control: Speed control of a gas fan made, with acquisition issue.	During preventive maintenance or any other operation requiring this control, the Aag gas board does not detect the return of the speed setpoint.	Check fan motor wiring, i.e. correct connection of speed feedback connector, correct connection of connector on gas board, wiring between these two elements, if correct, replace motor.
<b>i103</b>	Gas Control: Control of a burner done, with rapid ignition, OK.	If the average ignition time is less than or equal to 9 seconds.	No intervention.
<b>E104</b>	Gas Control: Control of a burner done, with average ignition but OK.	If the average ignition time is greater than 9 seconds and less than or equal to 19.5 seconds.	Caution: plan a thorough check during the next preventive maintenance cycle.
<b>E105</b>	Gas Control: Control of a burner done, with ignition OK but difficult.	If average ignition time is greater than 19.5 seconds and less than or equal to 30 seconds.	Check burner ignition line, gas pressure at time of sequence, condition of valve and igniter if ok disassemble burner and readjust ignition electrodes.
<b>E106</b>	Gas Control: Control of a burner done, with ignition OK but very problematic.	If the average ignition time is greater than 30 seconds and less than or equal to 51 seconds.	Disassemble burner adjust or replace electrodes.
<b>E107</b>	Gas Control: Ignition failed. Safety activated.	If average ignition time is greater than 51 seconds.	See error E40 or E41.
<b>E108</b>	The grease collection is stopped.	The grease collection valve is close.	Open the valve.
		The pressure switch is defective.	In the " Technical Screen", check the state of the E1 input, the contact is normally closed, if it's open, check there is no overpressure,check the wiring, and if the problem persists, replace the pressure switch. Be careful, the pressure switch is setting by the builder, never modify the set.
		The circuit is blocked.	Check the grease flows properly, if problem, clean the circuit and/or replace the defective elements.



5.3 MAINTENANCE SCREENS


After taking into account the information provided by the customer, and if no error message is displayed on the screen, activate the diagnostic help module, which consists of 3 separate screens.

Help function checks the board's inputs and outputs, as well as the associated peripheral components:

- Screen 1 "Inlets Diagram" check inputs: temperatures, doors, water level, humidity, etc...
- Screen 2 "Outlets Diagram", comprising two screens, controls outputs: ventilation, heating, lighting, safety contactor, technical ventilation, IN valve, etc.
- Screen 3 "Hydraulic diagram" controls hydraulic outputs: water solenoid valves, cleaning pump, drain pump, descaling pump...

You can navigate between the various diagrams using the display area at the bottom of the screen, accessible from any of the 4 screens of the diagnostic assistance module.


5.3.1 INLETS STATUS SCREEN

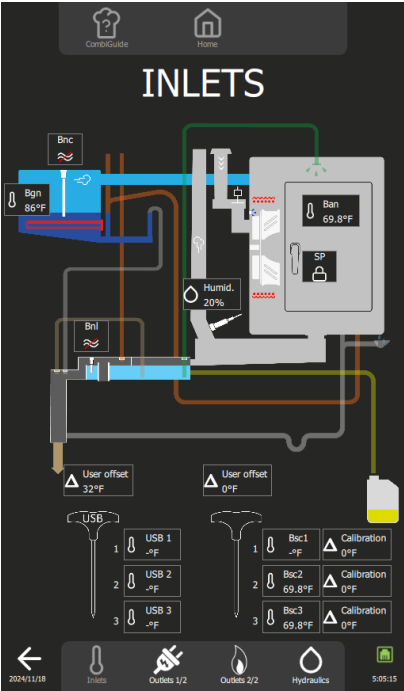

Inputs	Normal status	Remarks
Ban	Cooking cavity temperature	-
Sp	Door position	Padlock closed = door closed Padlock open = door open
Bnl	Cleaning box level	Red line through symbol = no water
Bnc	Steam generator water level	Red line through symbol = no water
Bgn	Steam generator temperature	-
Bsc1...3	Core probe temperature	-
Humid.	Humidity rate	-

5.3.2 OUTLETS STATUS SCREEN

This screen is divided into 2 screens: Outlets 1/2 and Outlets 2/2.

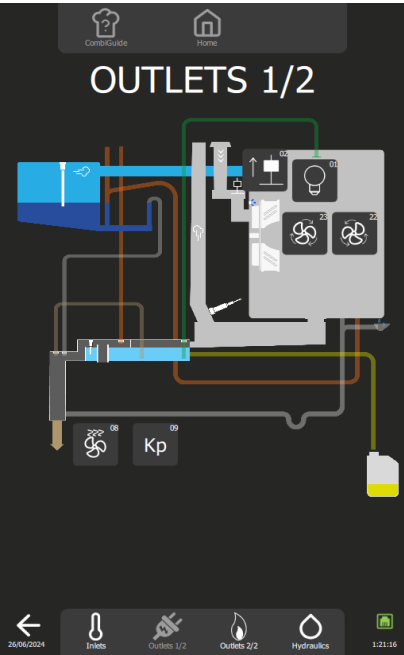


Screen 1/2

Pressing a button activates a timer, the duration of which may vary according to the element being controlled. This time delay can be cancelled by pressing the same button again.

No. Outlet	Components	Operating
01	Leds lighting	1 press on the button activates the lighting for 60s
02	In flapper motor	1 press on the button activates the flapper for 60s
08	Technical fan	1 press on the button activates the fan for 5s
09	Safety contactor	1 press on the button activates the contactor for 1s
22	Turbine (clockwise)	1 press on the button activates the turbine for 5s
23	Turbine (counterclockwise)	1 press on the button activates the turbine for 5s




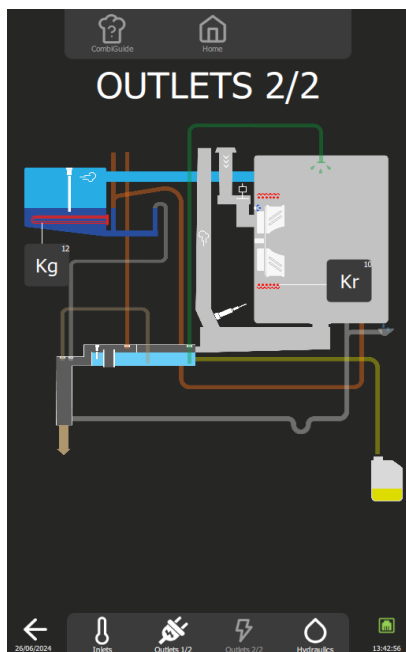

### Screen 2/2: Electric ovens

Pressing a button activates a timer, the duration of which may vary according to the element being controlled. This time delay can be cancelled by pressing the same button again.

No. Outlet	Components	Operating
10	Heating contactor	1 press on the button activates the contactor for 1s
12	Steam generator contactor	1 press on the button activates the contactor for 1s

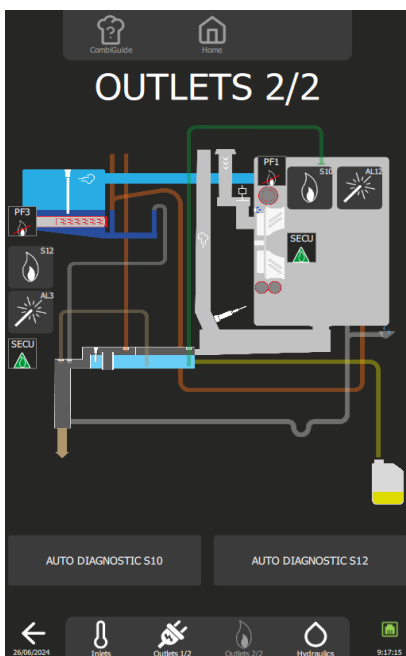

### Screen 2/2: Gas ovens

Pressing a button activates a timer, the duration of which may vary according to the element being controlled. This time delay can be cancelled by pressing the same button again.

No. Outlet	Components	Operating
AL12	Ignitor	1 press on the button, activates the igniter(s) for 5s
AL3	Steam generator igniter	1 press on the key, activates the igniter(s) for 5s
PF1	Burner 1 flame present	Crossed out: flame absent Not crossed out: flame present
PF2	Burner 2 flame present	Crossed out: flame absent Not crossed out: flame present
PF3	Burner 3 flame present	Crossed out: flame absent Not crossed out: flame present
S10	Outlet S10	1 press on the button activates outlet for 10s
S11	Outlet S11	1 press on the button activates outlet for 10s
S12	Outlet S12	1 press on the button activates outlet for 10s
SECU	Safety	Green: not active Red: active

### Procedure for checking the operation of the gas heater: presence of a flame in the burner (S10 - S11 or S12)

During the preventive maintenance visit, or in order to check the burners BEFORE removing them, you can use TWO TOOLS on this screen:

- The S10 / S11 / S12 burner buttons (number of burners depending on the model): Each button will attempt to ignite the burner, resulting in correct ignition and flame detection (the corresponding PFx icon is no longer crossed out), or in a safety shutdown (the associated SECU label changes to red).
- The « AUTO DIAGNOSTIC S10, S11 and S12 » buttons : These buttons are used to check that the gas burner fans are operating correctly and then to make a real evaluation of the ignition quality. Even if ignition takes place, the quality will be assessed on 4 levels, from Fast (perfect), to Problematic, to Medium and Difficult. Depending on the rating, it will not be necessary to remove the burner to check the electrodes and burners.


### Using the S10 / S11 / S12 burner buttons

- » Press button S10 or S11 (depending on the model) or S12 (depending on the type of burner to be tested) to activate the burner concerned.
  - ⚙ For 10 seconds, outlets Ar-10 / Ar-11 or Ar-12 on the Main board closes, as well as outlets Ar-081 and Ar-09. This causes the relay on the gas board to close, initiating an ignition cycle.
- » If this fails, try again.
  - ⚙ If the PF1 / PF2 or PF3 sticker is no longer crossed out, and the associated SECU sticker stays green, this indicates that the system is operating correctly.
    - Check the heating elements (igniters, gas board, etc.). (► Troubleshooting)
- » If another failure occurs, make a third attempt.
  - ⚙ If the PF1 / PF2 or PF3 sticker is no longer crossed out, and the associated SECU sticker changes to red, this indicates that the system isn't operating correctly.

- Dismantle the burner and clean and/or adjust the electrodes in accordance with the instructions in this manual. (► Electrode inspection). (► [Control of the electrodes](#))


Using the “S10 / S11 / S12 auto-diagnostic” buttons

In progress

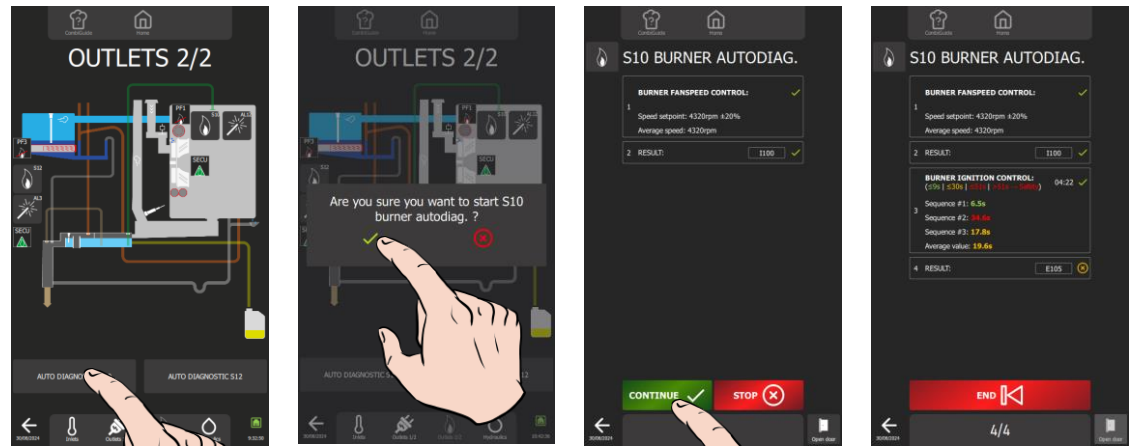

- » Pressing the AUTO DIAGNOSTIC button S10 or S11 (depending on the model) or S12 (depending on the type of burner to be tested) activates the burner self-diagnosis module.

5.3.3 HYDRAULIC DIAGRAMS

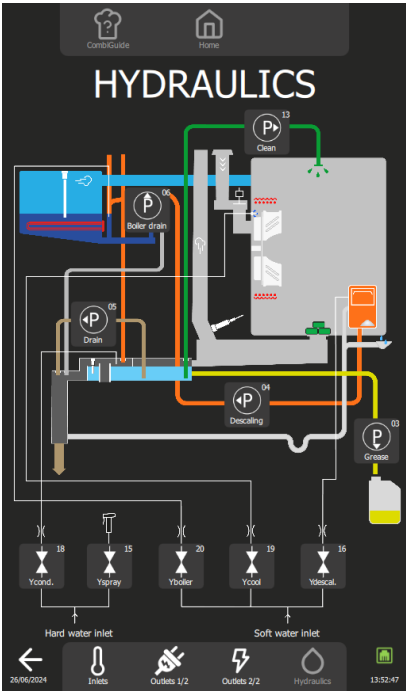


Pressing a button activates a timer, the duration of which may vary according to the element being controlled. This time delay can be cancelled by pressing the same button again.

No. Outlet	Components	Operating
P - 13	Cleaning pump	1 press on the button activates the pump for 5s
P - 06	Steam generator drain pump	1 press on the button activates the pump for 5s
P - 05	Cleaning box drain pump	1 press on the button activates the pump for 5s
P - 04	Descaling pump	1 press on the button activates the pump for 5s
P - 03	Grease collection pump (optional)	1 press on the button activates the pump for 5s
Ycond. - 18	Condenser solenoid valve	1 press on the button activates the solenoid valve for 60s
Yspray - 15	Spray solenoid valve	1 press on the button activates the solenoid valve for 60s
Ysteam generator - 20	Steam steam generator solenoid valve	1 press on the button activates the solenoid valve for 60s
Ycool - 19	Cooling solenoid valve	1 press on the button activates the solenoid valve for 60s
Ydescal. - 16	Descaling solenoid valve	1 press on the button activates the solenoid valve for 60s

## 5.4 COMMUNICATIONS LEDS

### 5.4.1 LEDS IDENTIFICATION

#### Main board, humidity board

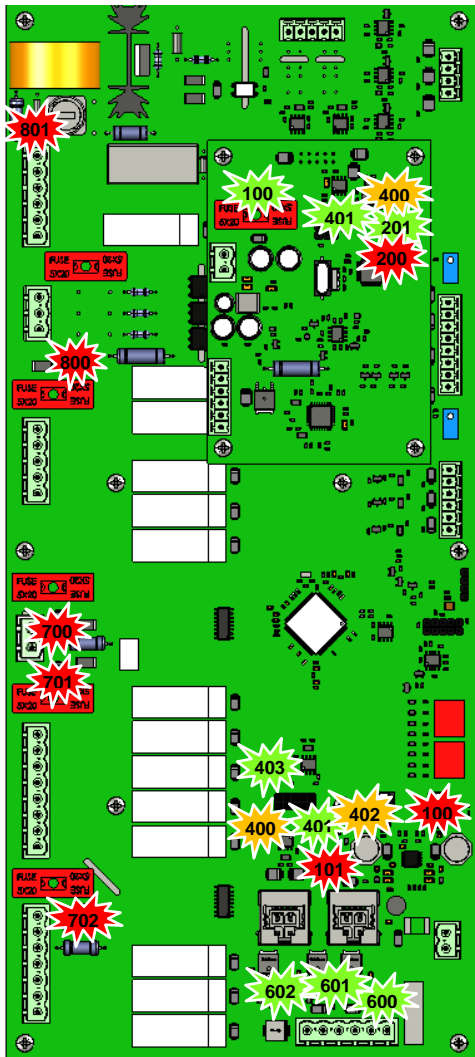


#### Main board

LED	Colour	Status	Designation
100	Green	On - Permanent	3.3 Volt voltage present
101	Red	On - Permanent	5 Volt voltage present
400	Orange	Flashing	Tx signals RS485 communication
401	Green	Flashing	Tx signals RS485 communication
402	Orange	Flashing	Tx signals RS485 communication
403	Green	Flashing	Tx signals RS485 communication
600	Green	On - Permanent	Outlet S1 switched on
601	Green	On - Permanent	Outlet S2 switched on
602	Green	On - Permanent	Outlet S3 switched on
700	Red	On - Permanent	Fuse F2 OK
701	Red	On - Permanent	Fuse F3 OK
702	Red	On - Permanent	Fuse F4 OK
800	Red	On - Permanent	Fuse F1 OK
801	Red	On - Permanent	Lighting if activated Kp. Fuse Fm OK

#### Humidity board


LED	Colour	Status	Designation
100	Green	On - Permanent	Fuse F1 OK
200	Red	Flashing then Off	Indicates uncorrect operation of the humidity sensor
201	Green	Flashing then Permanent	Indicates correct operation of the humidity sensor
400	Orange	Flashing	RS485 communication Tx signals - Transmit
401	Green	Flashing	RS485 communication Rx signals - Reception

#### Gas board

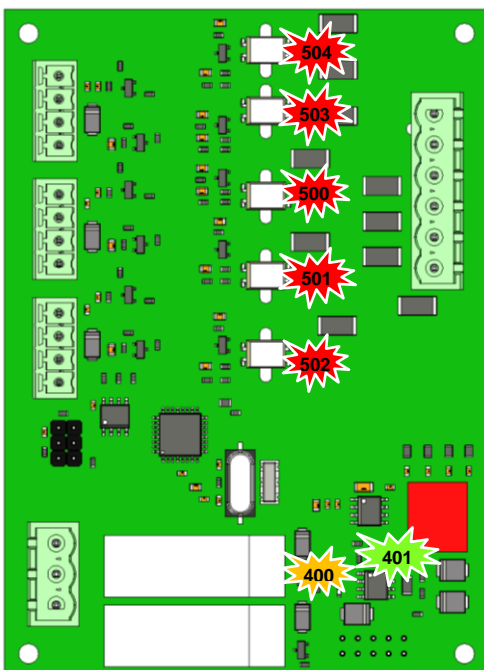

LED	Colour	Status	Designation
400	Orange	Flashing	Tx signals RS485 communication
401	Green	Flashing	Tx signals RS485 communication
500	Red	Permanent	Presence of gas in the gas steam generator burner
501	Red	Permanent	Presence of gas in convection heater burner 2 (on certain models only)
502	Red	Permanent	Presence of gas in convection heater burner 1
503	Red	Permanent	Gas safety fault - steam generator burner
504	Red	Permanent	Gas safety fault - convection heat burner



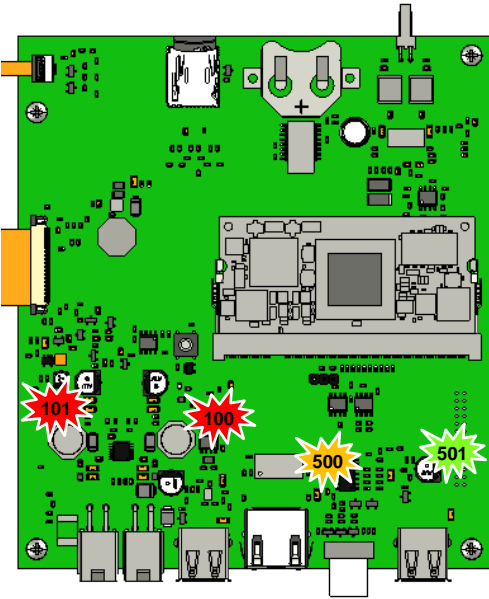

Interface board




LED	Colour	Status	Designation
100	Red	On - Permanent	3.3 Volt voltage present
101	Red	On - Permanent	5 Volt voltage present
500	Orange	On - Permanent	Tx signals RS485 communication
501	Green	On - Permanent	Tx signals RS485 communication

5.4.2 OPERATION: COMMUNICATION


Legends

LED	Meaning
	Green - Receiving
	Orange - Transmitting
	Red - Power on
	LED off


Communication LEDs Main board and Interface board

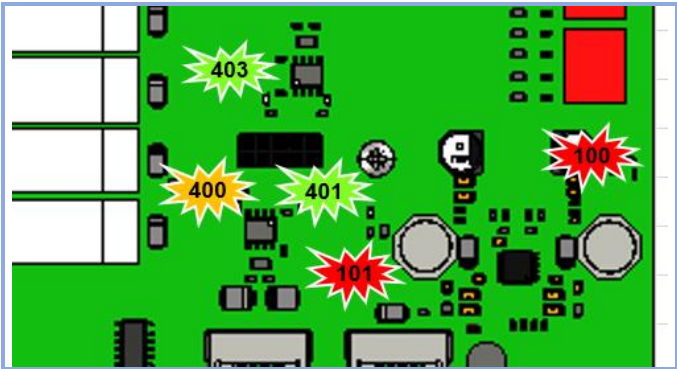

Ai Interface Board				Aa Main board				Diagnostics	Solutions
101	100	500	501	400	401	101	100		
								Aa and Ai board - OK	Functioning normally
								Power supply failure	Check for 24 Vd.c. at the terminals of J18
								Connection problem with Ai board	Replace interconnecting cable between Ar and Ai board, and/or Ai board
								Aa board - Out of order	Replace the Aa board
								Ai board - Out of order	Replace Ai board
								Interconnecting Cable between Ai board and Aa assembly faulty	Replace nterconnecting cable

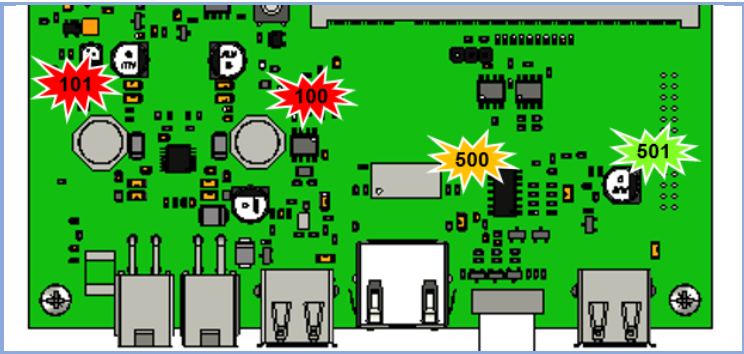


Communication LEDs Gas board

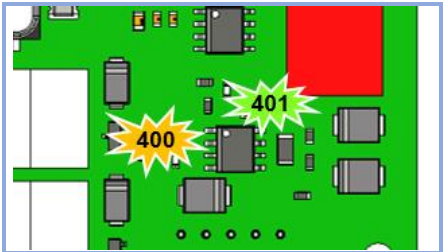

Gas board Aag		Diagnostics	Solutions
400	401		
		Aag board - OK	Functioning normally
		Aag board - Out of order	Replace the board

Communication LEDs Humidity board

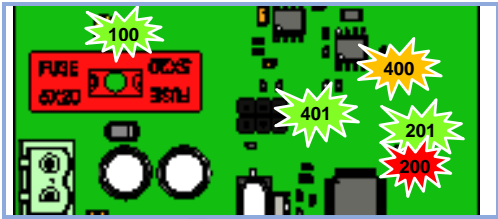

Humidity board Ahu		Diagnostics	Solutions
401	400		
		Ahu board - OK	Functioning normally
		Ahu board - Out of order	Replace the board

Humidity board Ahu		Diagnostics	Comments
201	200		
		Standby	
		Initialization	Flashes - Start-up or wake-up from standby.
		Start-up calibration	Alternating flashes.
		Initial heating ramp on heater	Blinking proportional to heating percentage.
		Heater temperature within control range	Normal functioning.
		Heater overheating	Flashing.
		Other errors	<ul style="list-style-type: none"><li>- Ar communication error</li><li>- CJ125 calibration error</li><li>- Supply voltage too low</li><li>- Humidity sensor missing or incorrectly connected</li><li>- Heater probe current zero.</li></ul>



## 5.5 OTHER SYMPTOMS


All electrical measurements must be carried out in compliance with local legislation (personnel authorization, use of PPE, etc.).  
OFF-VOLTAGE tests must absolutely be carried out in this configuration. Make sure you carry out these tests safely (consignment, etc.).

SYMPTOM	CAUSE	WHAT TO DO?
The oven is not working the display is off.		
	- Supply voltage is not present at the device terminals.	Check condition of the power cable and all the connection points, and rectify any problems encountered.
	- Oven circuit breaker is not switched on.	Switch circuit breaker on or have it switched on. If it trips again, verify appliance is properly insulated; leakage currents must be less than 30mA.
	- System voltage is not present at the Ar Main board terminals.	Check voltage at terminals 1 and 2 of connector J18 (refer to the electronic diagram in this manual). If there is no voltage, disconnect connector J18: - If voltage is present again, replace the Main board, - If voltage is still absent, check the Tc power supply. Verify its correct operation is indicated by a green LED; if necessary, replace power supply.
	- Molex connector link cable between Main board and the screen is faulty.	Verify voltage is present. Check communication LEDs (see LED assignment section in this document). If the problem persists, replace the cable.
	- Screen is faulty.	If the problem persists, replace the screen.
	- Short-circuit at switching power supply output.	LEDs (switching power supply, red LEDs on the Main board) are flashing. Disconnect cable between the interface board and encoder board.
	- Encoder inoperative, LED ring does not light up.	Verify it is correctly connected and operating correctly. If problem persists, replace encoder board.
Screen inoperable, system won't start, random malfunctions, difficulty updating.		
	- Loss of communication.	Refer to the "screen inoperable or blocked" flowchart in this manual.
Display on, oven not working.		
	- An error code displayed (blocking message).	Refer to error code section of this manual.
	- The oven door is not closed properly.	Make sure oven door is correctly locked.
	- The switch does not detect when the oven is closed.	Check status of the door closing position switch in the technical panel, if the output remains at "0". On the Aar Main board, verify J5 connector is correctly connected to its socket, verify contact closes when the door is closed and that it is correctly fitted mechanically. If the problem persists, adjust the door and replace the switch if necessary.
The screen is lit, the oven works but the lighting does not.		
	- LED banners are not powered.	Refer to "Enclosure lighting fault" flow chart in this document.
The screen is lit, the oven, lighting and ventilation are working, but it does not heat up or does not reach the set temperature.		
<b>Special case of electric ovens</b>		
	- One or more heating elements do not work.	Refer to "electric heater fault" diagram in this document.
<b>Special case of gas ovens</b>		
Burner does not ignite.		
	- Igniter does not work.	Refer to "gas igniter fault" diagram in this document.
	- Gas fan not working.	Check fan power supply at terminal 2 of Kbg or Kbr and Xb. - if 230Va.c. present, change the fan. - if there is no 230Vac, verify Kbg or Kbr contactor is switched on, check the connections and tighten the screws, etc.
	- No gas or too low pressure.	Verify gas entering the appliance is of the correct type and pressure.
	- The gas valve does not work.	Check the resistance of the 848 Sigma gas solenoid valve coils Ev1 (terminals 4-3) and Ev2 (terminals 1-3); - If the resistance is greater than 0, check the gas pressure at the valve inlet and the burner heating demand; if the burner does not ignite, replace the valve, - If the resistance is equal to 0, replace the valve.
	- The ionisation electrode does not detect the flame.	Check electrode (see electrode adjustment section of this manual).
	- The flame control box does not work.	Turn off the gas supply and start cooking, if at the end of the ignition sequence: - "gas error" fault appears, the flame control box is operational, proceed with the above checks. - if the error does not appear, replace the flame control box.
Noisy burner.		
	- The gas settings are incorrect or the wrong gas is being connected.	Check in the technician parameters that the gas selected corresponds to what is indicated on the oven identification plate.


		Check gas supplied to the oven is the same as that indicated on the oven identification plate.
	- Gas valve incorrectly set.	Check CO2 level by following the procedure indicated in the manual.
	- Air supply problem.	Check that the air inlet tube is correctly connected and that it is not obstructed.
	- The silicone venturi valve connection tube is disconnected or faulty.	Check that the tube is correctly connected. If the problem persists, replace it.
Explosion on starting gas burner.		
	- The ignition electrode is incorrectly adjusted.	Check the electrode settings: insulation of the wires in relation to ground (stray sparks), check that the electrode soapstone is not broken See "Checking the electrodes" section.
Polluting burner.		
	- The gas settings are incorrect or the wrong gas is being connected.	Check in technician parameters that gas selected corresponds to what is indicated on the oven identification plate. Check gas supplied to the oven is the same as what is indicated on the oven identification plate.
	- Gas valve incorrectly set.	Check CO2 level by following the procedure indicated in the manual.
Burner fan running at full speed.		
	- Communication fault between the Main board and the gas valve.	Check status of LEDs on gas board.
		- If they are off, verify the gas board is connected to the Main board (rear connector, condition of connections) and the gas board mounting screws are secure to the Main board.
		- If they are lit, check the various connections (screwing and fixing the connectors to their sockets) from gas board to the fan.
The burner emits a random whistling sound.		
	- When the oven is cold, a hissing sound may be heard.	This should disappear quickly as the burner heats up.
	- If the problem persists.	Check air intakes (unobstructed vents).
The igniter works continuously.		
	The Presence Flame (PF) does not return.	Fault in the connection between gas box and the gas card, verify wires and connections are secure. Fault in the connection between the gas board and Main board, check state of the LEDs on gas board, verify rear connection between the gas board and Main board, verify the gas board screws and connections are secure to the Main board, if the problem persists, replace the gas board.
The pump whistles.		
	- Air in the circuit.	Check the circuit for leaks (connections, hoses, etc.).
	- Defective bearings.	Verify the flow rate is as specified in this manual.

## 5.6 FLOWCHART


## 5.6.1 SCREEN INOPERATIVE OR BLOCKED

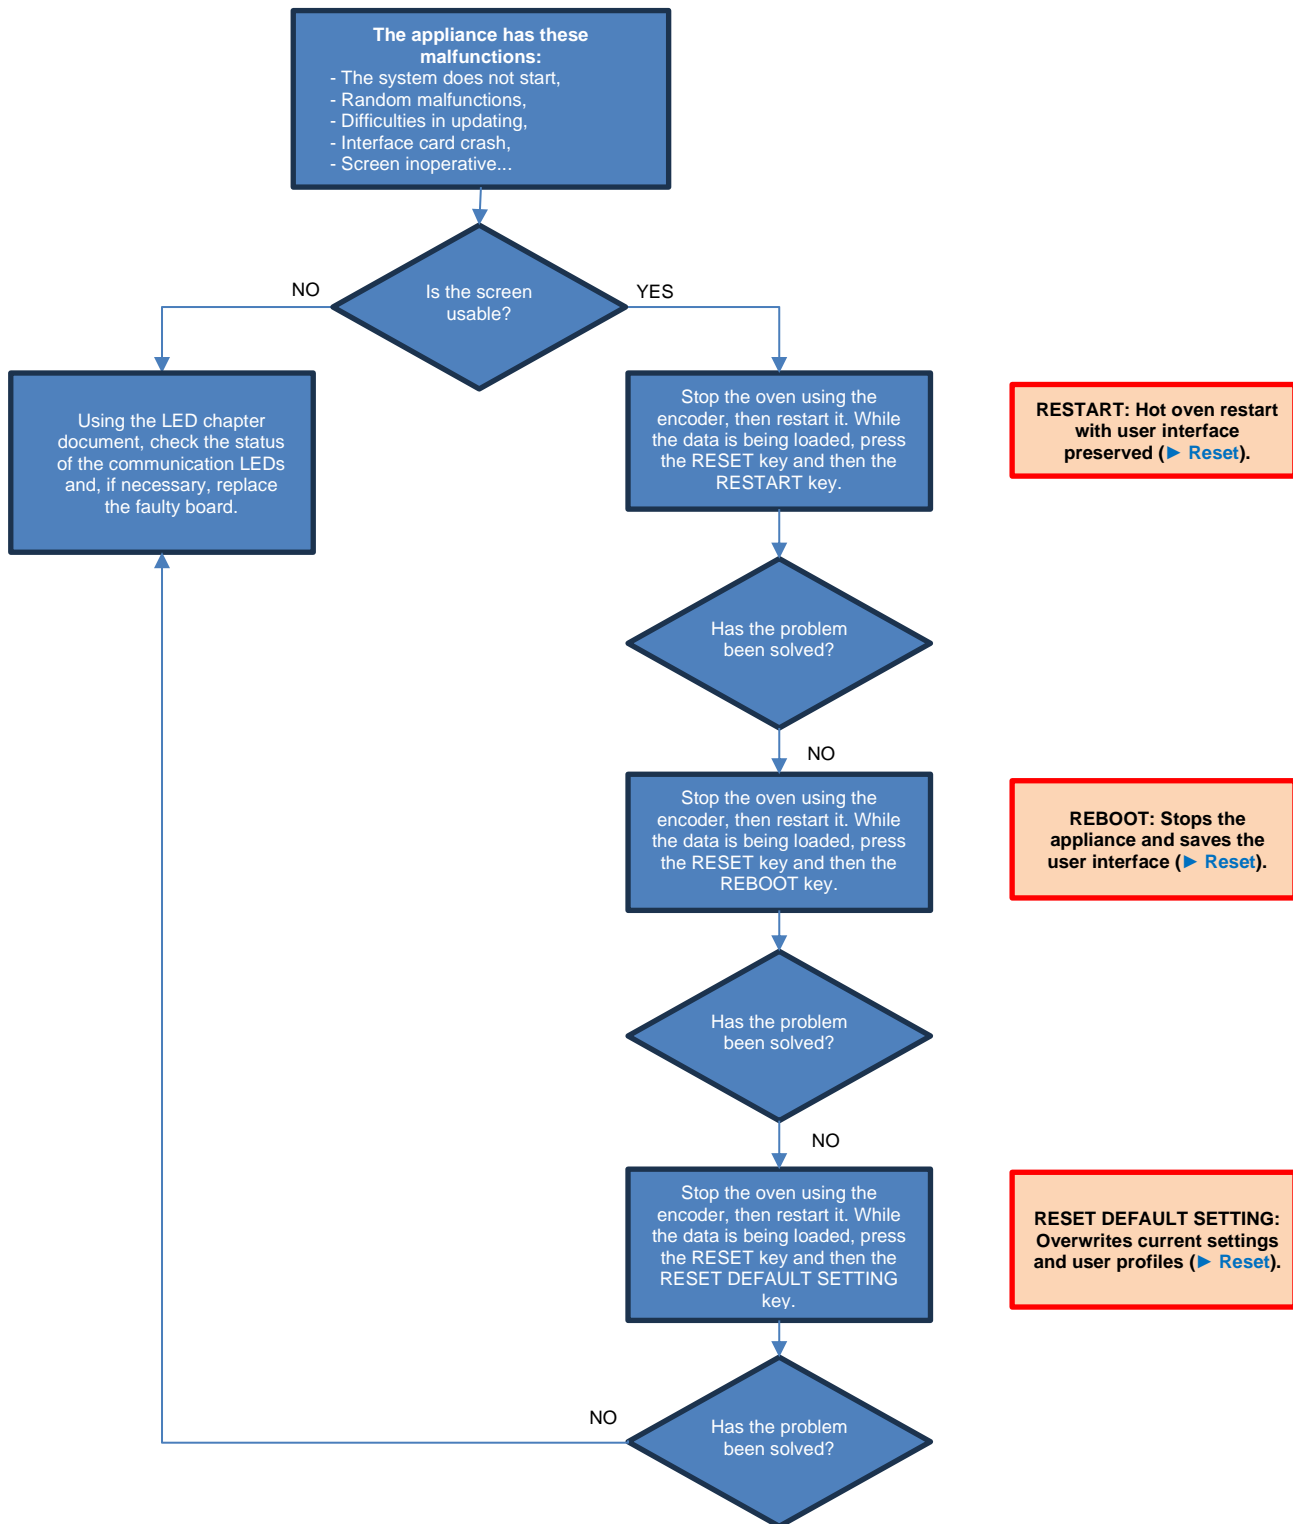


5.6.2 LIGHTING FAULT OF COOKING CAVITY

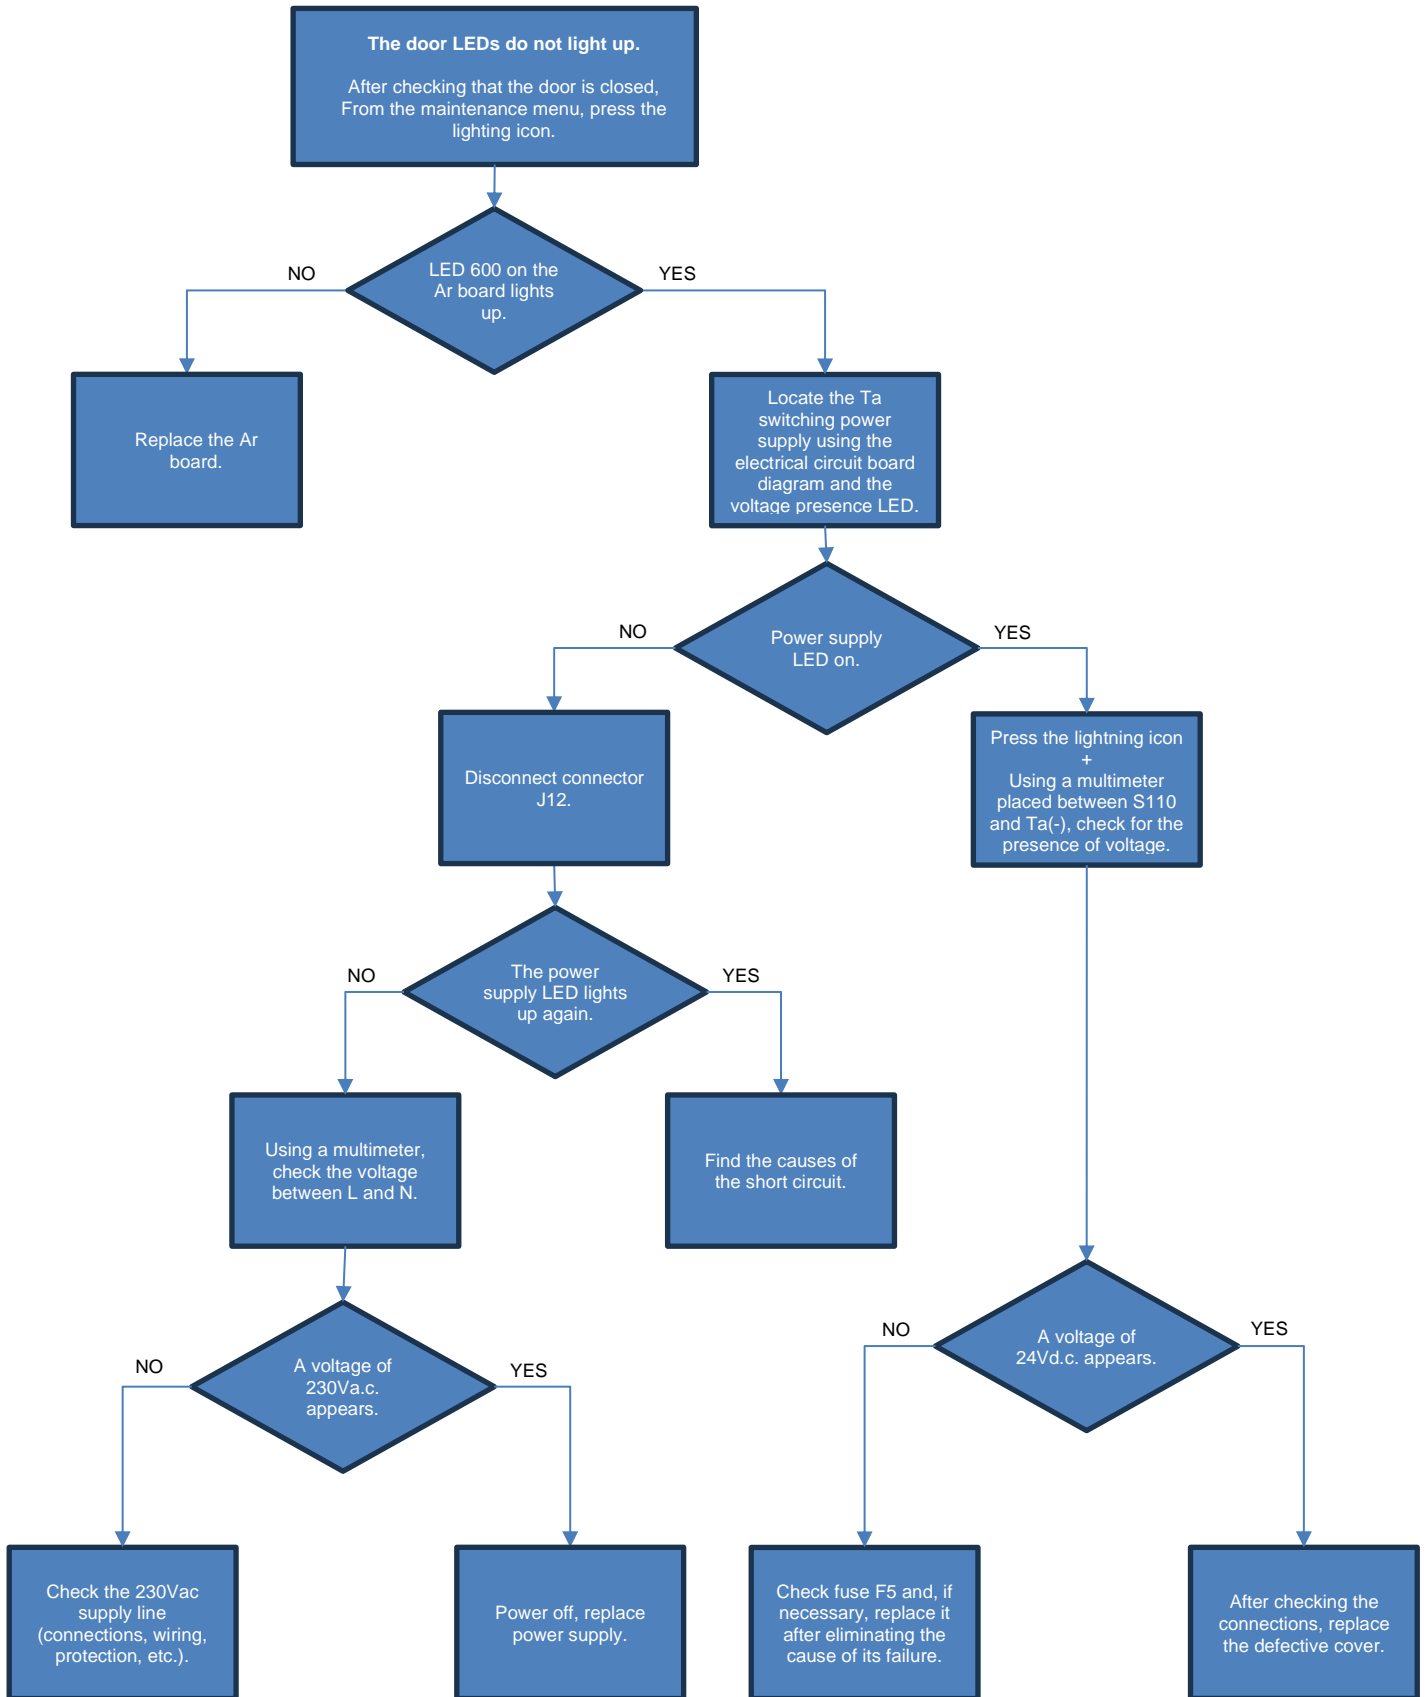

5.6.3 ELECTRIC HEATER FAULT

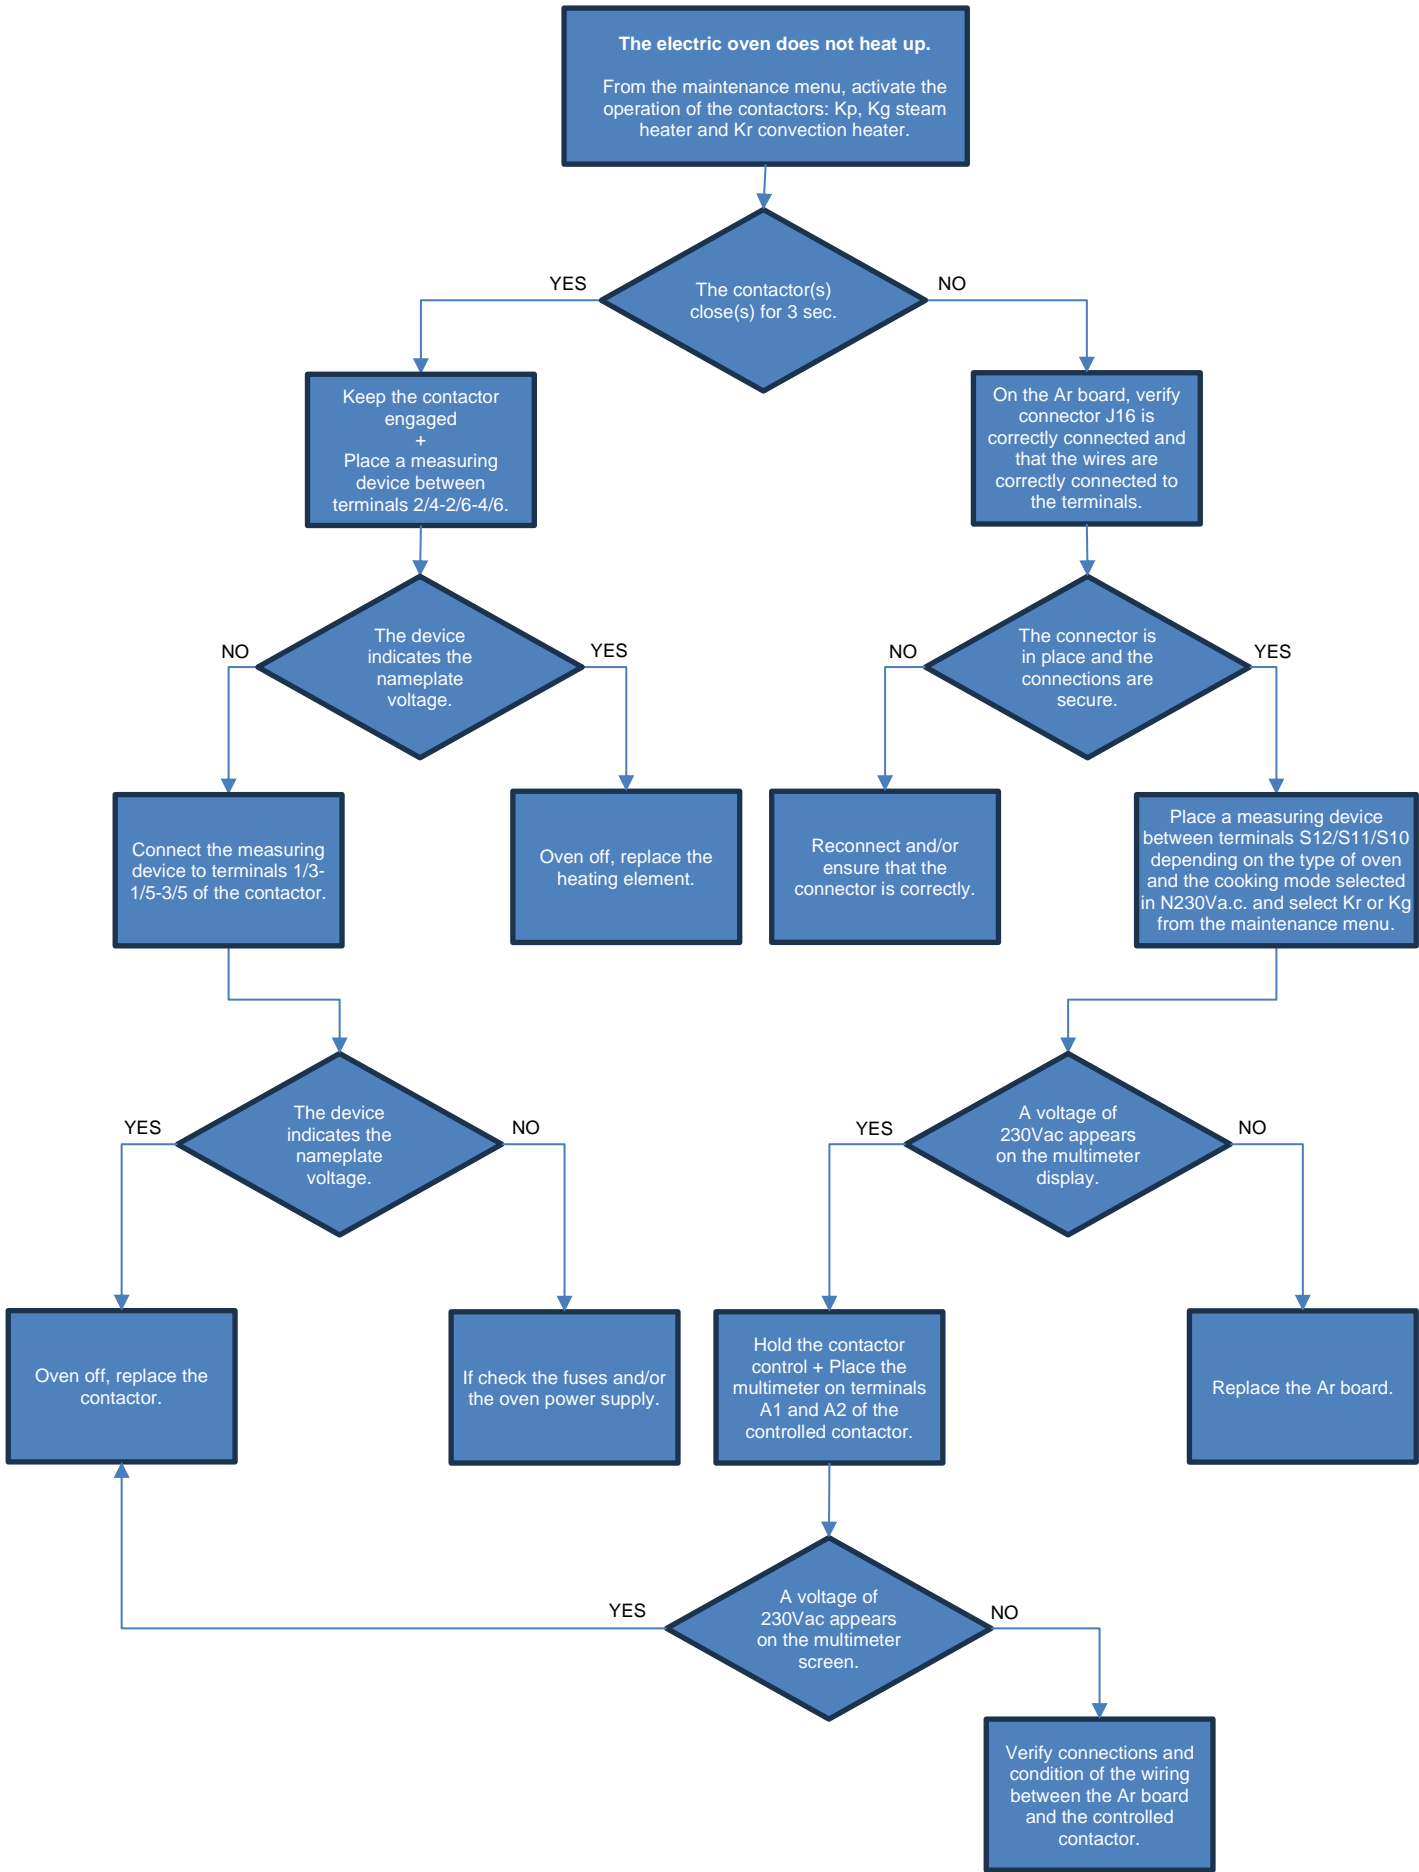


## 5.6.4 GAS IGNITER FAULT

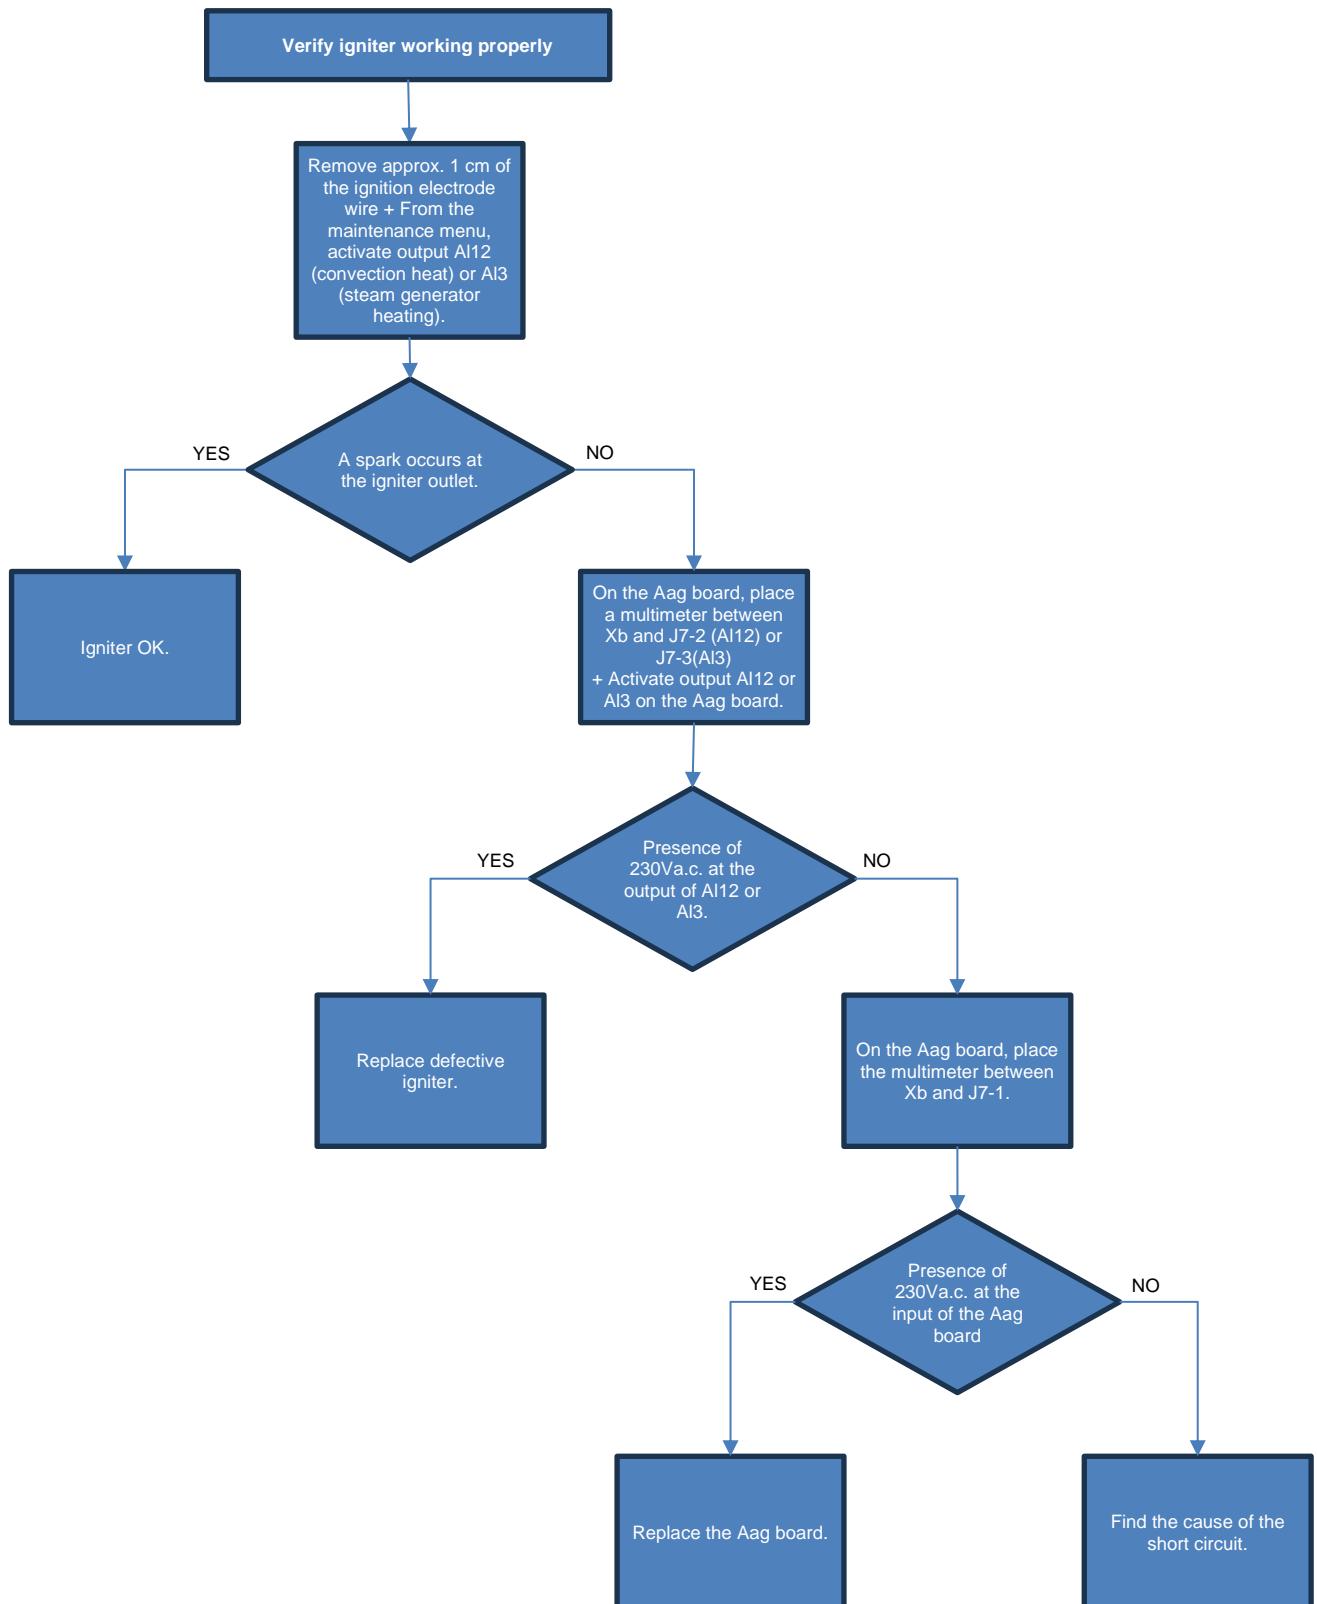




## 5.7 RESET

### 5.7.1 ACCESS TO THE RESET SCREEN

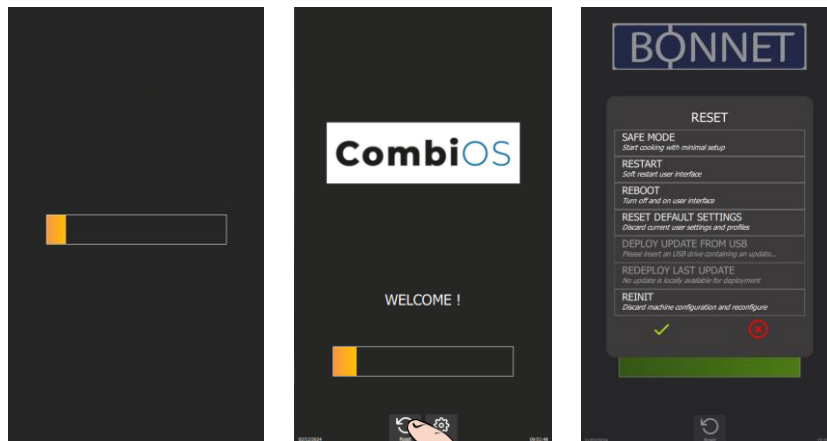

- » Switch on the display by holding down the encoder button until the power-on bar graph is displayed.
- » Wait for the "Home" menu to appear.
- » Press "Reset" button.
  - ⓘ The display shows a pop-up of possible actions.


### 5.7.2 PARAMETERS LIST

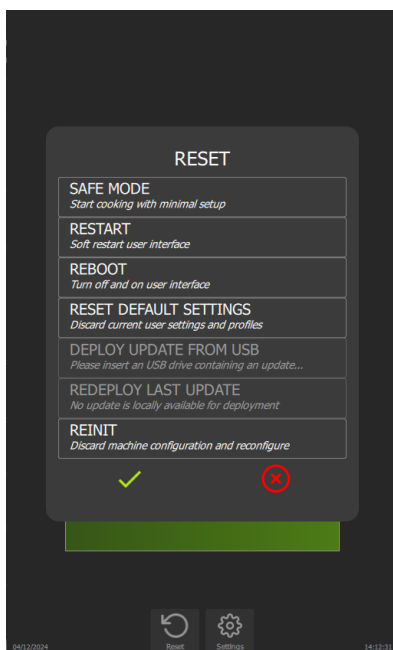


- ➔ Switch Chef'sCombi to Safe Mode
- ➔ Restart Interface
- ➔ Restart interface and Main board
- ➔ Reset to default settings
- ➔ Reinstall an update from a USB key
- ➔ Reinstall last update
- ➔ Reset Chef'sCombi configuration (accessible with factory PIN code only)
- ➔ Validate or cancel selected "Reset" type

#### Safe mode

This action enables you to go into safe mode with minimal configuration. Only the ambient temperature: the default temperature is 356°F, and the cooking mode: convection heat cooking mode are indicated.

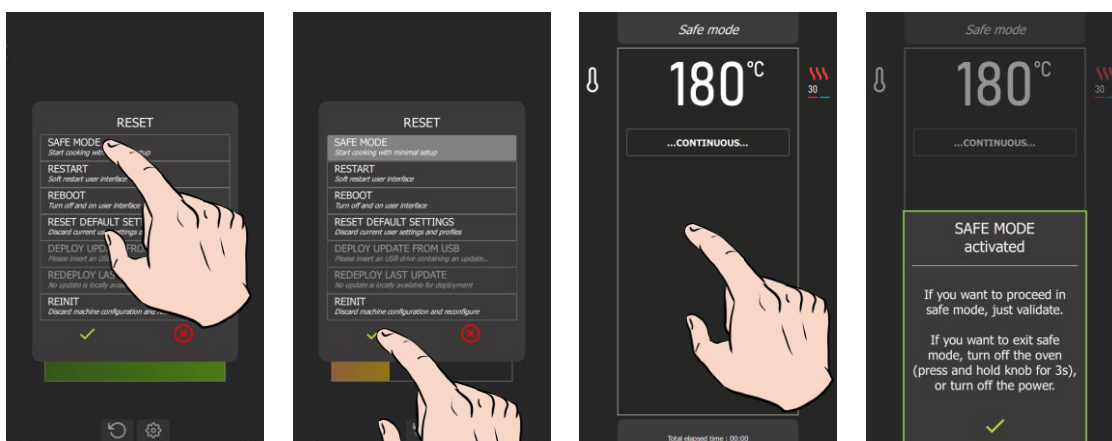

On confirmation, the continuous icon appears on the display, indicating cooking similar to the continuous cooking mode. When the screen is pressed, an information message appears, indicating the following:

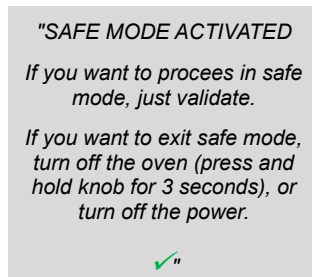

In the event of a problem with the screen, this mode can be obtained by successively opening the door 3 times within 5 seconds at power-up.

#### **Restart: Restart the interface**

This option performs a basic restart of the Chef'sCombi interface. **No customer-configured parameters are affected.**

#### **Reboot: Restart with reset**

This function restarts the unit and exits the current cycle. **No customer-configured parameters are affected.**

#### **Reset default settings**

This function resets current settings and user profiles. Access to this action is protected by a PIN code, guaranteeing the security of the process. In particular, it deletes parameters, profiles, customer protocols, manufacturer protocols and customer photos. After a reset, it is necessary to redo the CO control and steam generator calibration.



#### **WARNING! Please inform the customer!**

All parameters configured and copied by the customer, such as settings, profiles, protocols (recipes), photos, etc... will be deleted.

#### **Deploy update from USB : Reinstall an update from a USB stick**

This feature is active when a USB key is connected to the appliance. It allows you to reinstall (force) an update from a USB key.



When a manufacturer update is in progress, there is no need to activate this menu. If the update version on the USB key is higher than the one already present in the chef'sCombi memory, the update starts automatically (► [Settings : Updating the software](#)).

#### **Redeploy last update : Reinstall the last update**


This menu allows you to reinstall the latest update installed on the appliance. It is essential to select this option when corrupted parameters have been installed or detected by the appliance. A clean backup is kept on the SD card.



## 6. ELECTRIC DIAGRAMS

### 6.1 DIAGRAMS

#### 6.1.1 GAS OVENS


Wiring diagram


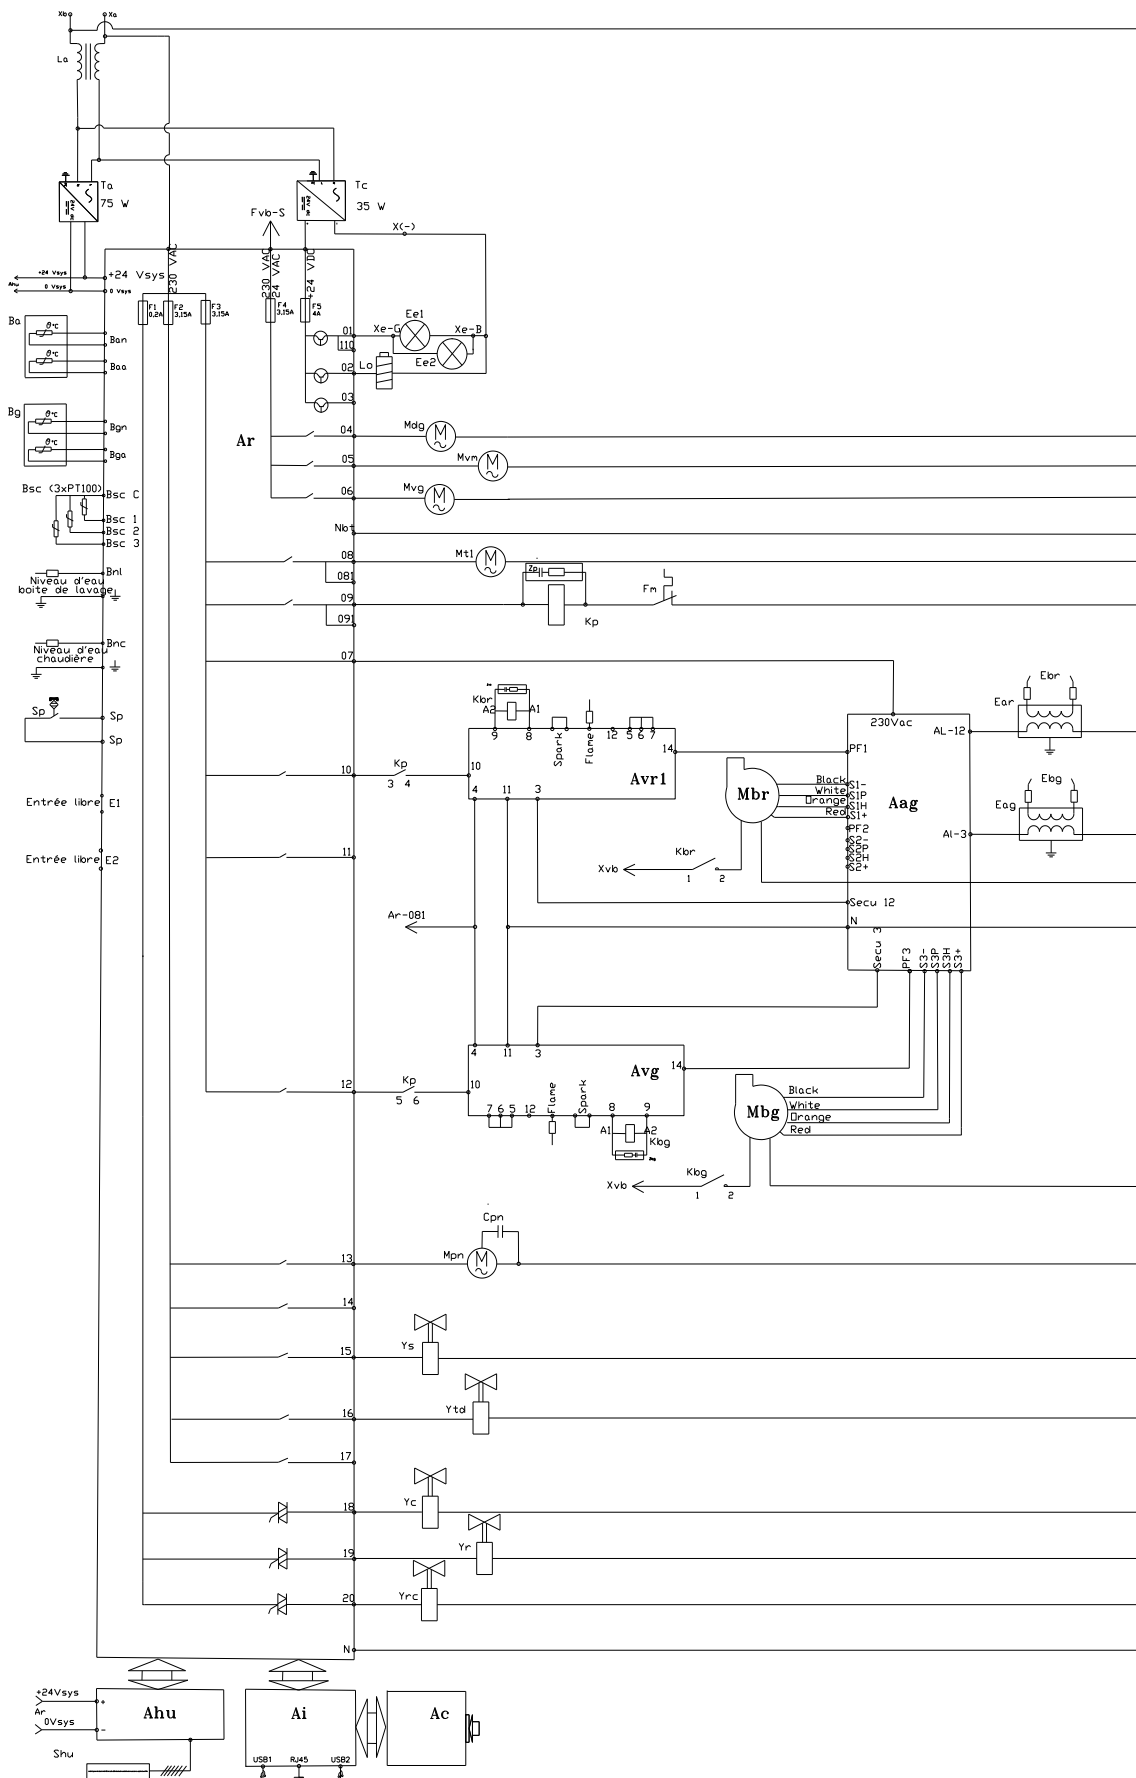




## 6.1.2 ELECTRIC OVENS


Wiring diagram

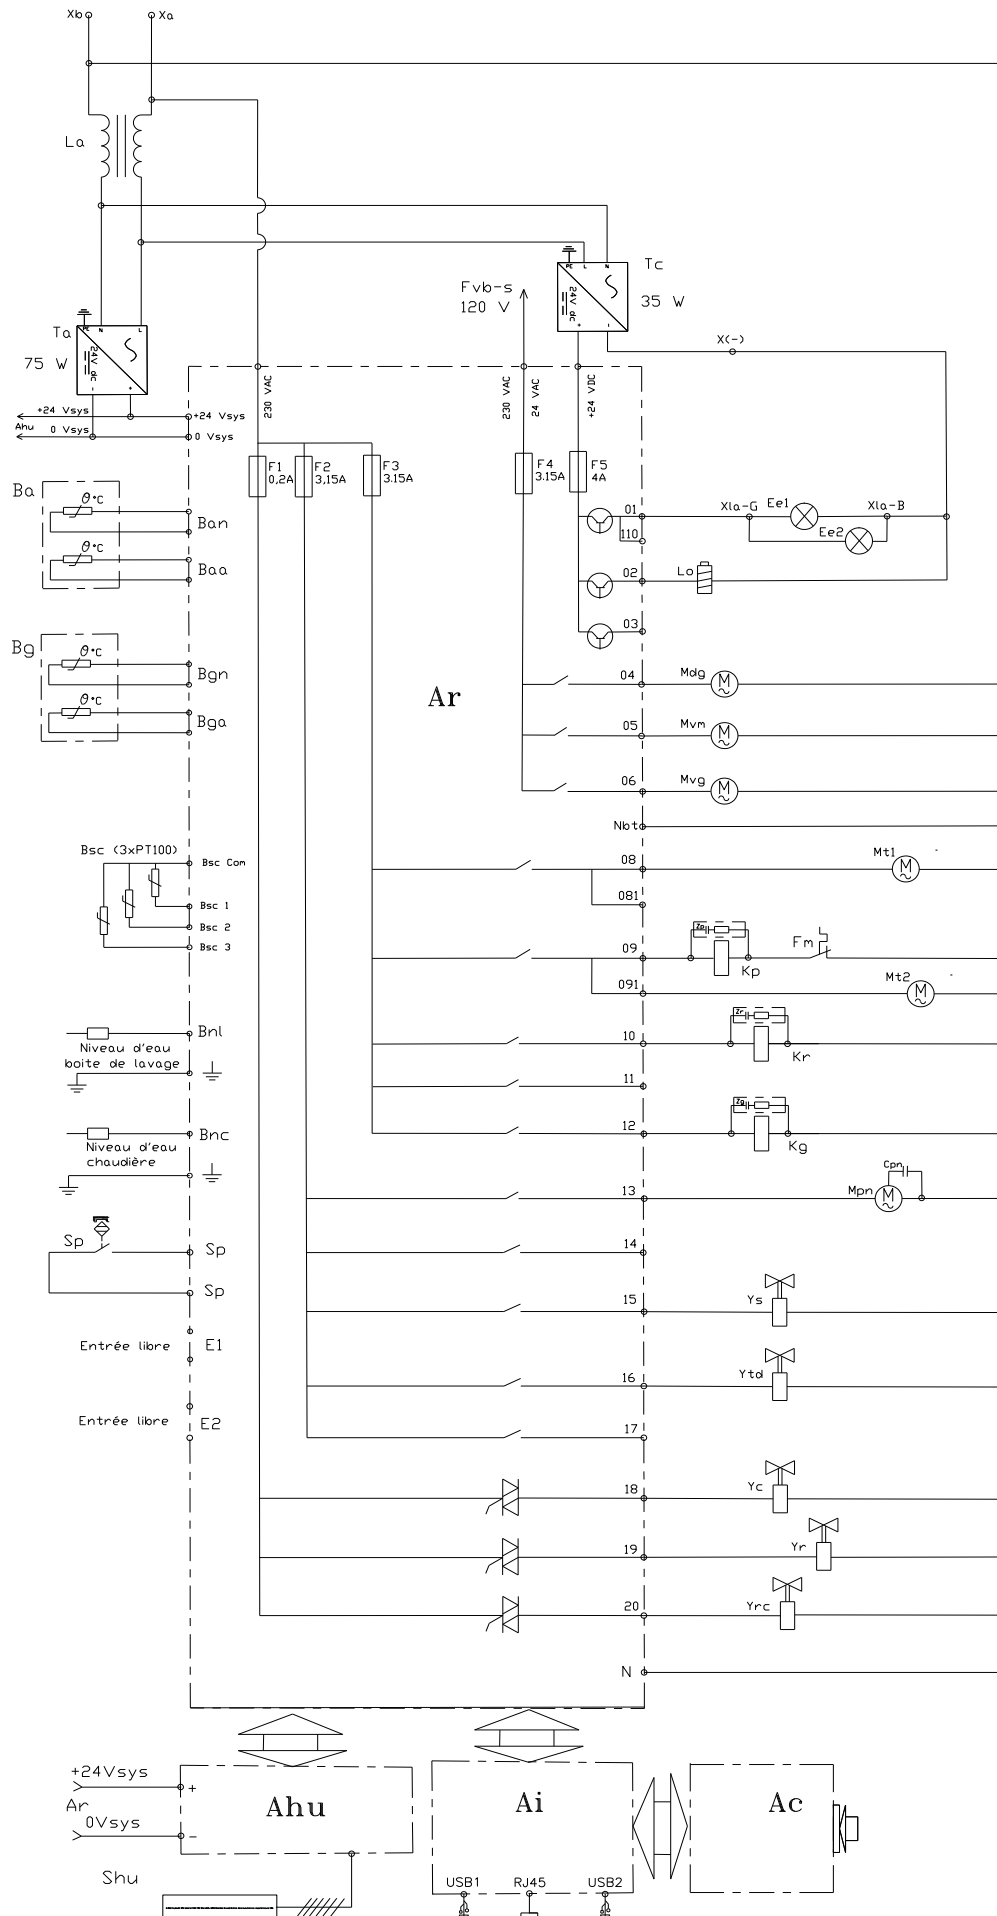







Power diagram 6GN2/1 – 480V

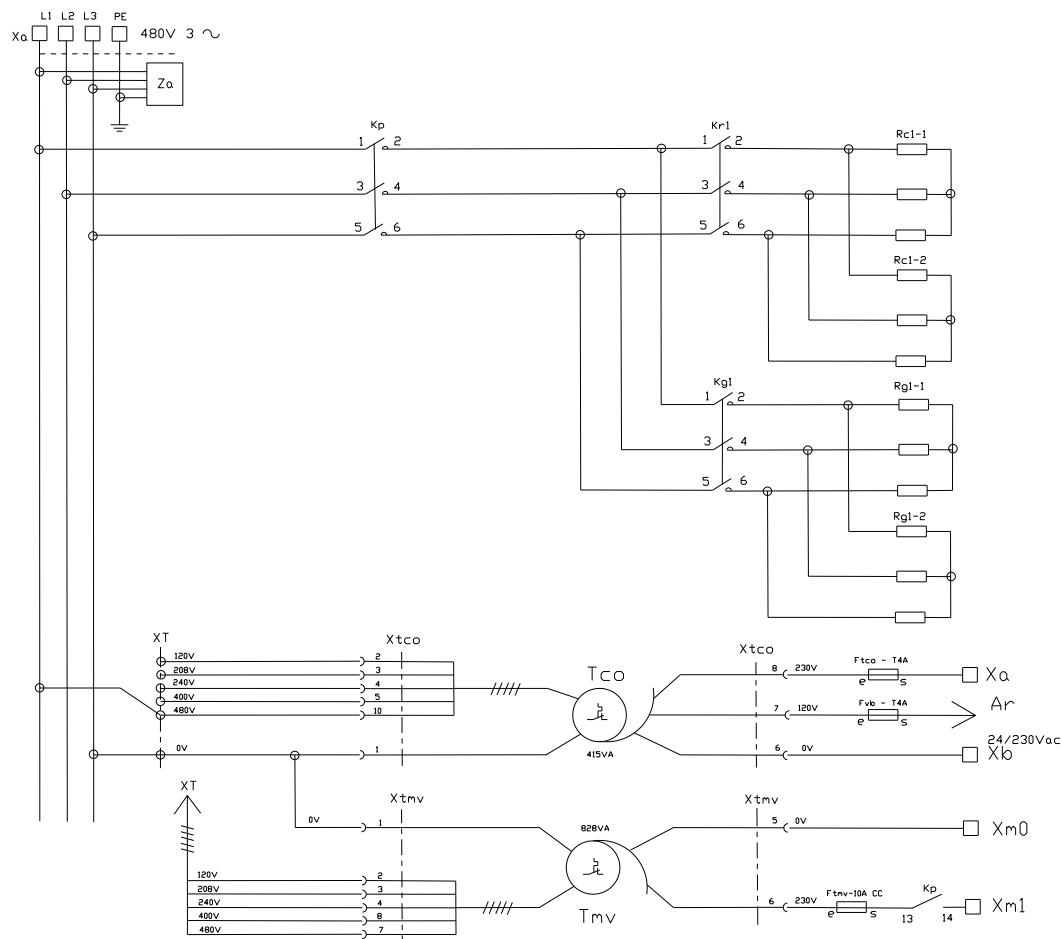


Power diagram 6GN2/1 and 10GN1/1 – 208V-240V

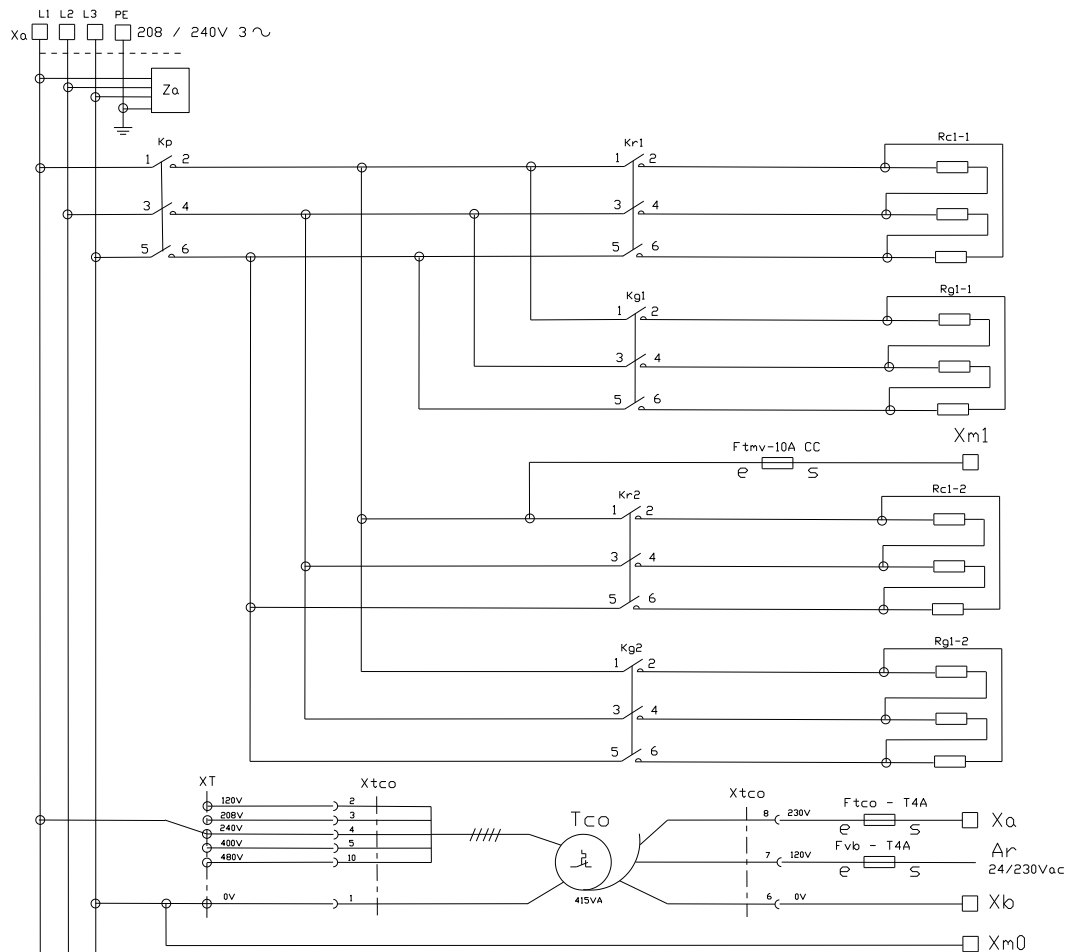


Power diagram 10GN1/1 – 480V

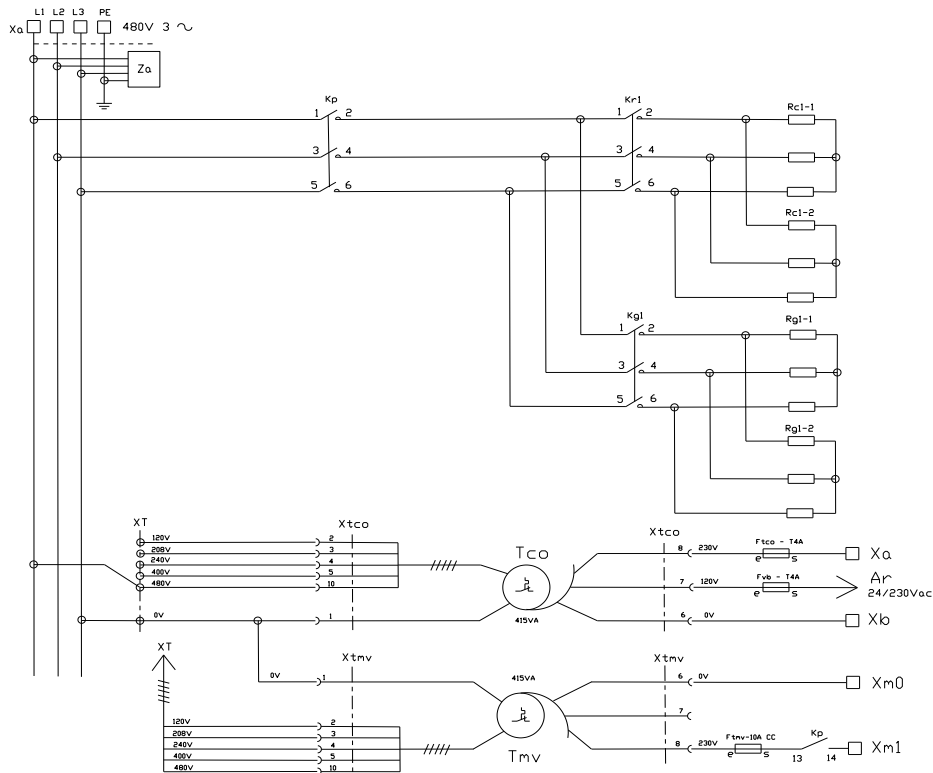


Power diagram 10GN2/1 – 208V-240V

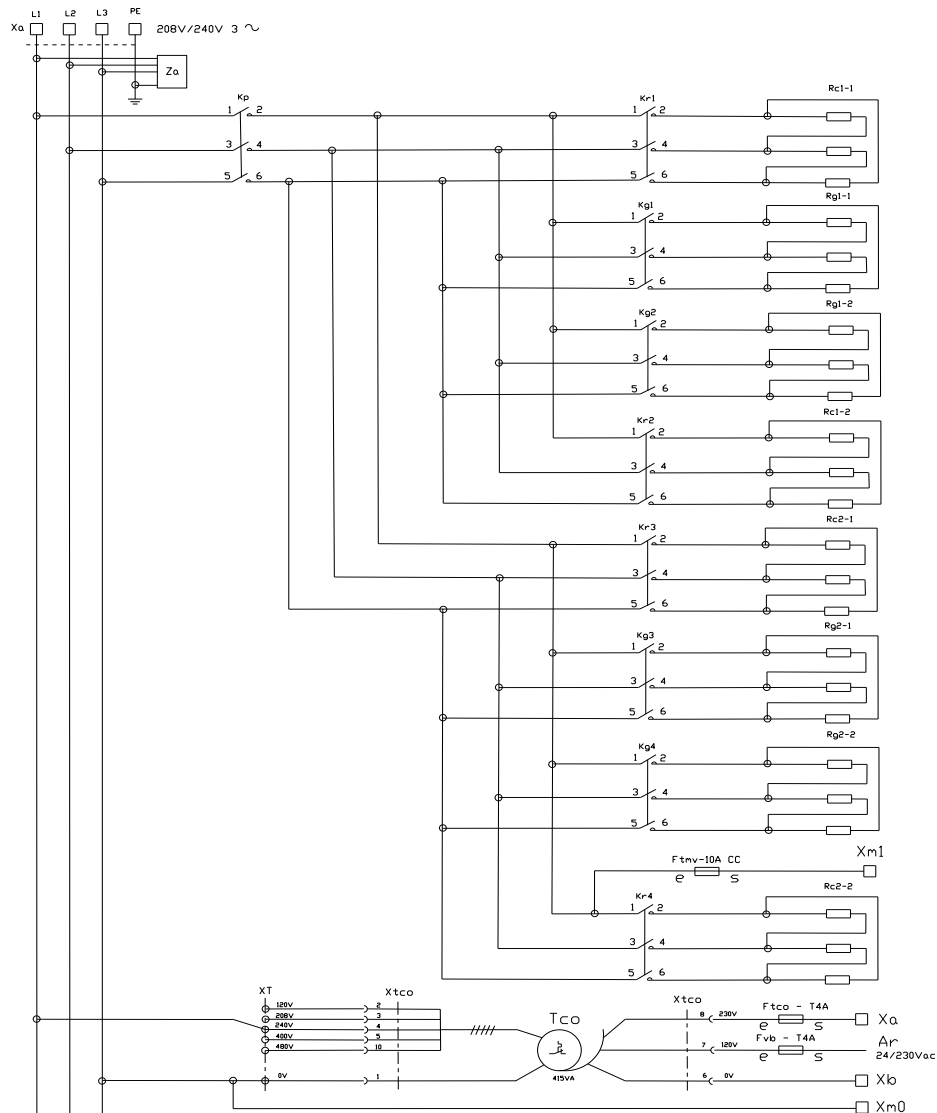



6.3 GREASE COLLECTION OPTION

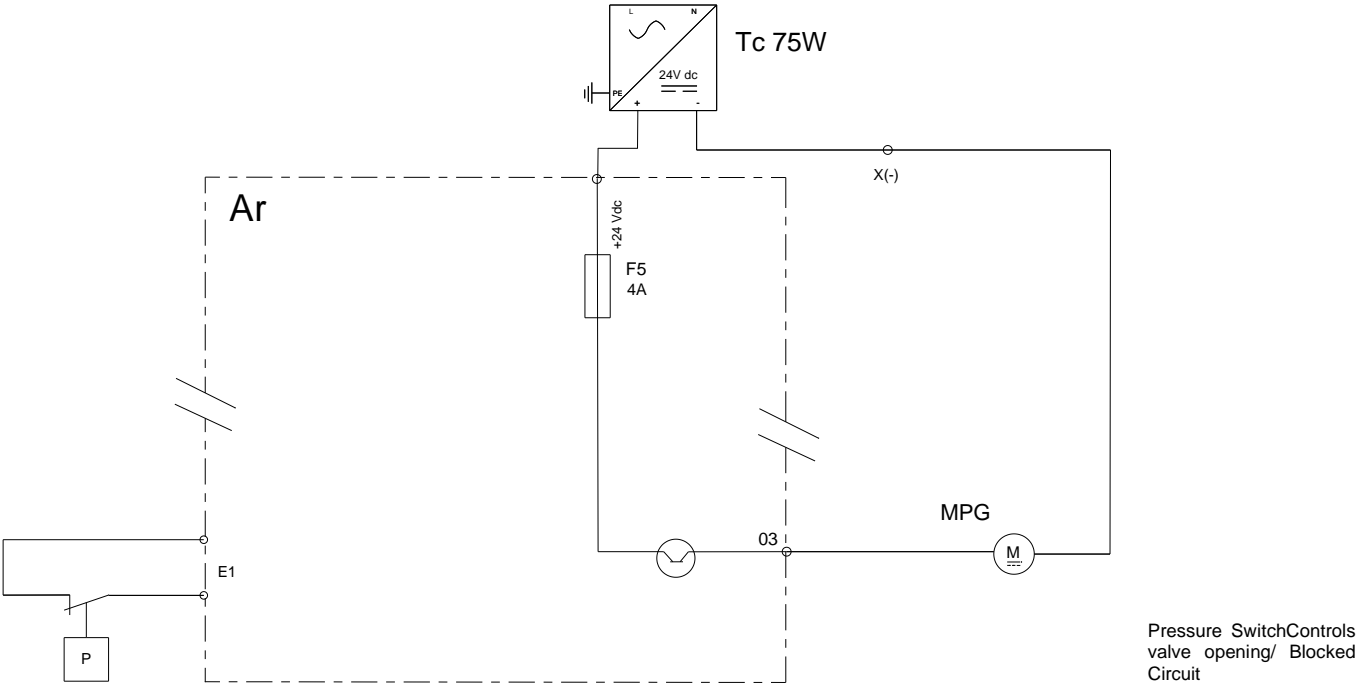

## 6.4 PARTS LIST

## Common components

Ref.	Designation	Characteristics	Quantity	Code
<b>Ac</b>	Encoder board		1	309716
<b>Ahu</b>	Additional humidity board		1	309718
<b>Ai</b>	Interface board		1	309714
<b>Ar+Ah</b>	Main + humidity boards	Electric oven	1	309720
<b>Ar+Ah+Aag</b>	Main + humidity + gas boards	Gas oven	1	309721
<b>Ba</b>	Ambient probe	PT100	1	159030
<b>Bg</b>	Steam generator temperature probe	PT100	1	159028
<b>Bnc</b>	Steam generator level probe		1	301514
<b>Bnl</b>	Cleaning box level probe		1	301519
<b>Bsc</b>	Core probe	3-point probe - 6- level GN 1/1 ovens	1	301517
		3-point probe - 10-level GN 2/1 ovens	1	301518
		Probe 3 points - 6 levels GN2/1 & 10 levels GN1/1	1	301524
<b>Cpn</b>	Cleaning pump condensator	6.3µF	1	304311
<b>Cm</b>	Cavity motor condensator	12,5µF - GN1/1 oven	1	304296
		25µF - GN2/1 oven	1	304326
<b>Ee1 - Ee2</b>	LED strips	24Vd.c. 5W	1	309719
<b>F1</b>	Fast fuse	5x20 - 0,2 A	1	300787
<b>F2-F3-F4</b>	Time-delay fuses	5x20 - 3,15A	3	309407
<b>F5</b>	Standard automotive fuse	ATC - 4A	1	300807
<b>Fm</b>	Motor fuse	5x20 - 10A	1	300788
<b>Ftco</b>	Fuse holder and fuse	4A T	1	300777 + 300801
<b>Ftmv</b>	Fuse holder and fuse	10A CC	1	300792 + 300793
<b>Fvb</b>	Fuse holder and fuse	4A T	1	300777 + 300801
<b>La</b>	EMC filter		1	309639
<b>Lo</b>	Electromagnet of In flapper	24Vd.c. 8,3W	1	468108
<b>M1</b>	Cavity fan motor	6 and 10 levels GN1/1	1	147147
		6 and 10 levels GN2/1	1	159032
<b>Mdg</b>	Descaling pump motor	56W - Steam generator	1	304321
<b>Mpg</b>	Grease pump motor	24Vdc 31W	1	304314
<b>Mpn</b>	Cleaning pump motor	253W	1	314396
<b>Mt1 - Mt2</b>	Technical ventilation motor		1	304334
<b>Mvg</b>	Steam generator drain motor	56W	1	304323
<b>Mvm</b>	Cavity fan motor	56W	1	304322
<b>P</b>	Pressure switch			159064
<b>Shu</b>	Humidity sensor		1	301515
<b>Sp</b>	Closed door reed switch	Standard door	1	300806
		Reversed door option (left-hand fitting)	1	300805
<b>Ta</b>	Switching power supply	230Va.c. / 24Vd.c.	1	300802
<b>Tc</b>	Switching power supply	230Va.c. / 24Vd.c.	1	308353
		230Va.c. / 24Vd.c. if grease collection option	1	300802
<b>Tco</b>	Control transformer	415VA	1	408407
<b>Tcm</b>	Cavity fan motor transformer	6 and 10 levels GN1/1	1	408407
		6 and 10 levels GN2/1	1	408406
<b>Ys - Yc</b>	Two-way solenoid valve	Spray / Condenser	1	468105
<b>Ytd - Yr - Yi</b>	Three-way solenoid valve	Descaling / Steam generator / Injection	1	468107

## Contactors Electric ovens

208V/240V - 230V

Ref.	Designation	6 GN1/1	6 GN2/1	10 GN1/1	10 GN2/1
<b>Kg</b>	Steam generator contactor	300699 * 2	300699 * 2	300699 * 2	300699 * 4
<b>Zg</b>	Interference-suppression Blocks	300769 * 2	300769 * 2	300769 * 2	300769 * 4
<b>Kp</b>	Power contactor	300699	300702	300702	300798
<b>Zp</b>	Interference-suppression Blocks	300769	407002	407002	300799
<b>Kr</b>	Regulation contactor ( convection heater)	300699	300699 * 2	300699 * 2	300699 * 4
<b>Zr</b>	Interference-suppression Blocks	300769	300769 * 2	300769 * 2	300769 * 4

480V

Ref.	Designation	6 GN1/1	6 GN2/1	10 GN1/1	10 GN2/1
<b>Kg</b>	Steam generator contactor	300697	300698	300698	300698 * 2
<b>Zg</b>	Interference-suppression Blocks	300769	300769	300769	300769 * 2
<b>Kp</b>	Power contactor	300697	300699	300698	300702
<b>Zp</b>	Interference-suppression Blocks	300769	300769	300769	407002
<b>Kr</b>	Regulation contactor ( convection heater)	300697	300699	300698	300699 * 2
<b>Zr</b>	Interference-suppression Blocks	300769	300769	300769	300769 * 2

**Contactors Gas ovens**

Ref.	Designation	6 GN1/1	6 GN2/1	10 GN1/1	10 GN2/1
<b>Kbg</b>	Steam generator burner contactor	300697	300697	300697	300697
<b>Kbr</b>	Burner regulation switch	300697	300697	300697	300697
<b>Kp</b>	Power contactor	300697	300697	300697	300697
<b>Zp - Zvb - Zbg</b>	Interference suppressor	300769	300769	300769	300769

**Heating elements Electric oven**

Ref.	Designation		6 GN1/1	6 GN2/1	10 GN1/1	10 GN2/1
<b>Rc</b>	Convection heating elements	208V	<i>Codes</i>	159010	159012	159013
			Vulcan codes	00-978295	00-978296	00-978308
		240V	<i>Codes</i>	159005	159007	159008
			Vulcan codes	00-978291	00-978292	00-978293
		480V	<i>Codes</i>	159015	159017	159018
			Vulcan codes	00-978299	00-978300	00-978301
<b>Rg</b>	Steam generator immersion heaters	208V	<i>Codes</i>	159024	159025	159025
			Vulcan codes	00-978305	00-978306	00-978306
		240V	<i>Codes</i>	159022	159023	159023
			Vulcan codes	00-978303	00-978304	00-978304
		480V	<i>Codes</i>	159026	159027	159027
			Vulcan codes	00-978305	00-978308	00-978308


**Specific components - Gas ovens**

Ref.	Designation	Characteristics	Quantity	Code
<b>Aag</b>	Additional gas board		1	309721
<b>Avg</b>	Steam generator gas solenoid valves		1	310356
<b>Avr1</b>	Gas solenoid valves regulation 1		1	310356
<b>Eag</b>	Steam generator gas igniter	prim:230Va.c. 0,3A /sec 1x15kV	1	408402
<b>Ear</b>	Gas igniter for convection heaters 1/2	prim:230Va.c. 0,3A /sec 1x15kV	1 or 2	408402
<b>Ebg - Ebr</b>	Curved ignition electrode		2	148885
	Straight ionisation electrode		2	148886
<b>Flamme</b>	Flame control electrode		2	148889
<b>Mbg</b>	Steam generator burner motor	207VA	1	159046
<b>Mbr</b>	Burner motor regulation	207VA	1	159046



## 7. HYDRAULIC DIAGRAM

### 7.1 6 AND 10 LEVEL OVENS

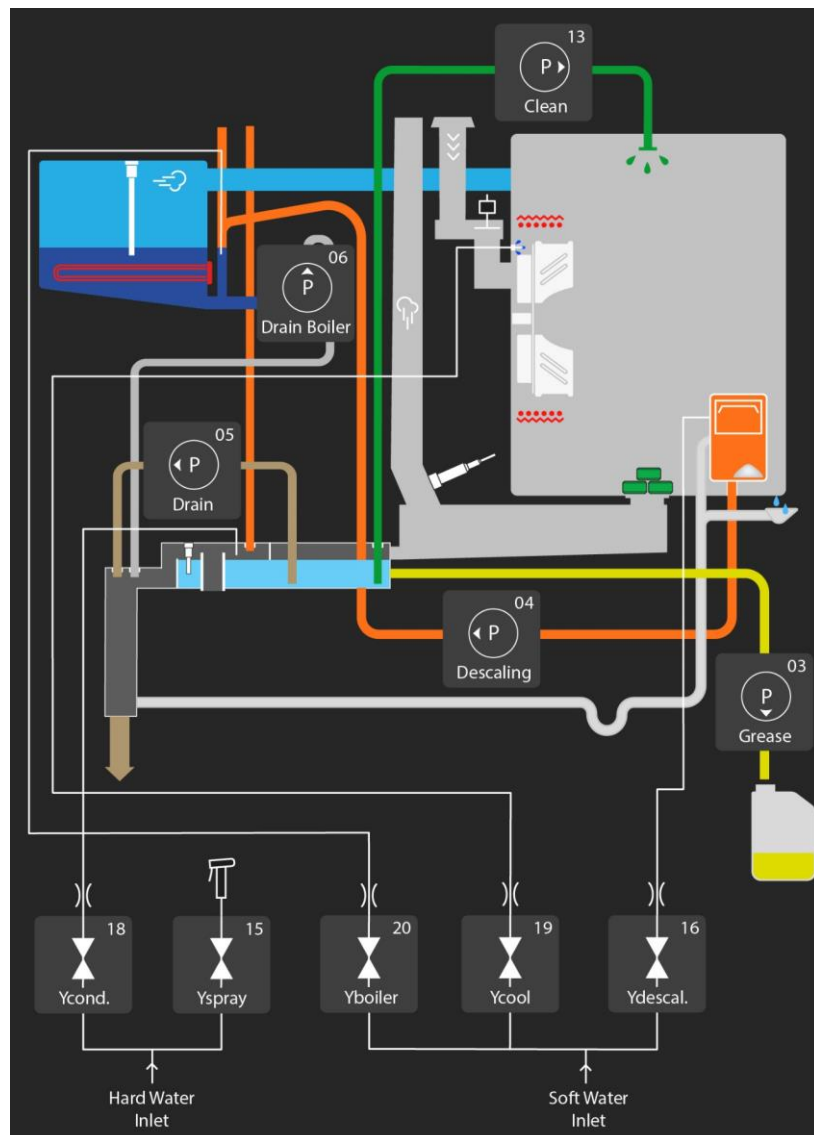

#### UNFILTERED WATER (hard water inlet)

Pressure (Min / Max)	14.5 psi / 87psi (1.5 bar / 6 bar)
Max cold water temperature	73°F
Nature	Filtered at 114 mesh
Water quality	Chloride Cl <sup>-</sup> : ≤ 8.76 gr/gal (150 ppm) Chlorine Cl <sub>2</sub> : ≤ 0.01 gr/gal (0.2 ppm) 6.5 ≤ PH ≤ 9
Conductivity	≥ 25 TDS
Connection	Male G 3/4" + GHT 3/4" adapter
Max. instantaneous consumption	3.35 gpm

#### FILTERED WATER (Soft water inlet)

Pressure (Min / Max)	14.5 psi / 87psi (1.5 bar / 6 bar)
Max cold water temperature	73°F
Nature	Filtered at 114 mesh
Hardness	3.5 to 11.6 grains/gal (60 to 200 ppm)
Water quality	Chloride Cl <sup>-</sup> : ≤ 8.76 gr/gal (150 ppm) Chlorine Cl <sub>2</sub> : ≤ 0.01 gr/gal (0.2 ppm) 6.5 ≤ PH ≤ 9
Conductivity	≥ 25 TDS
Connection	Male G 3/4" + GHT 3/4" adapter
Max. instantaneous consumption	2.03 gpm

#### TWO-WAY SOLENOID VALVE - COLD WATER

<b>Ycond</b>	Condenser solenoid valve	42,8 gal/h
<b>Yspray</b>	Solenoid valve for spray hose	158,5 gal/h


#### THREE-WAY SOLENOID VALVE - COLD WATER

<b>Yboiler</b>	Solenoid valve for steam generator filling	87.1 gal/h
<b>Ycool</b>	Cooling solenoid valve	14.4 gal/h
<b>Ydescal.</b>	Descaling solenoid valve	14.4 gal/h

#### PUMPS

<b>P - 13</b>	Clean	2061 gal/h
<b>P - 04</b>	Descaling	317 gal/h
<b>P - 05</b>	Drain	317 gal/h
<b>P - 06</b>	Drain steam generator	317 gal/h
<b>P - 03</b>	Grease	52,31 gal/h

7.1.1 FLOW LIMITER

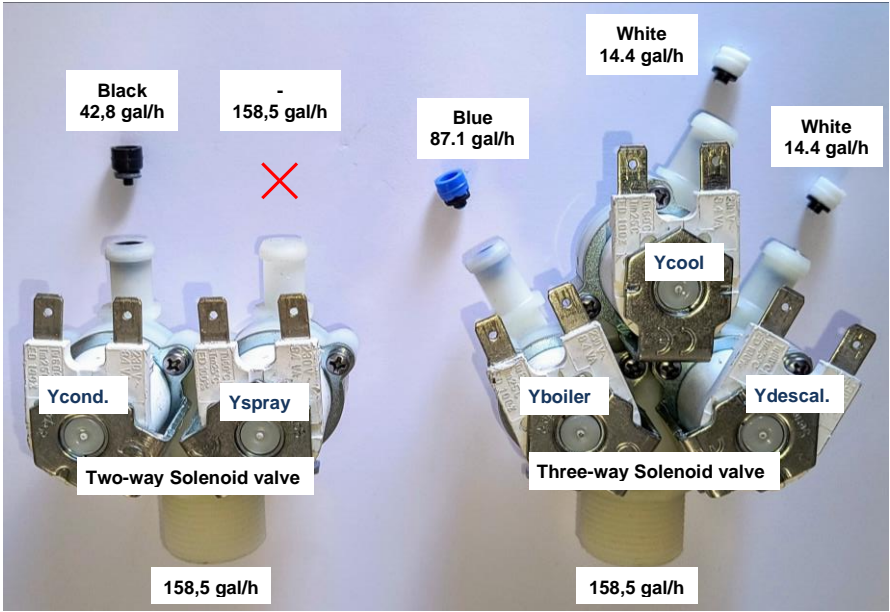


7.1.2 IDENTIFICATION OF TERMINALS



	<u>Two-way Solenoid valve</u>	<u>Three-way Solenoid valve</u>
	Condenser → Yellow Spray hose → Clear - Transparent	Cooling → Blue Steam generator → Pink - purple Descaling → Grey

## 8. GAS DIAGRAM

## 8.1 6 AND 10 LEVEL OVENS

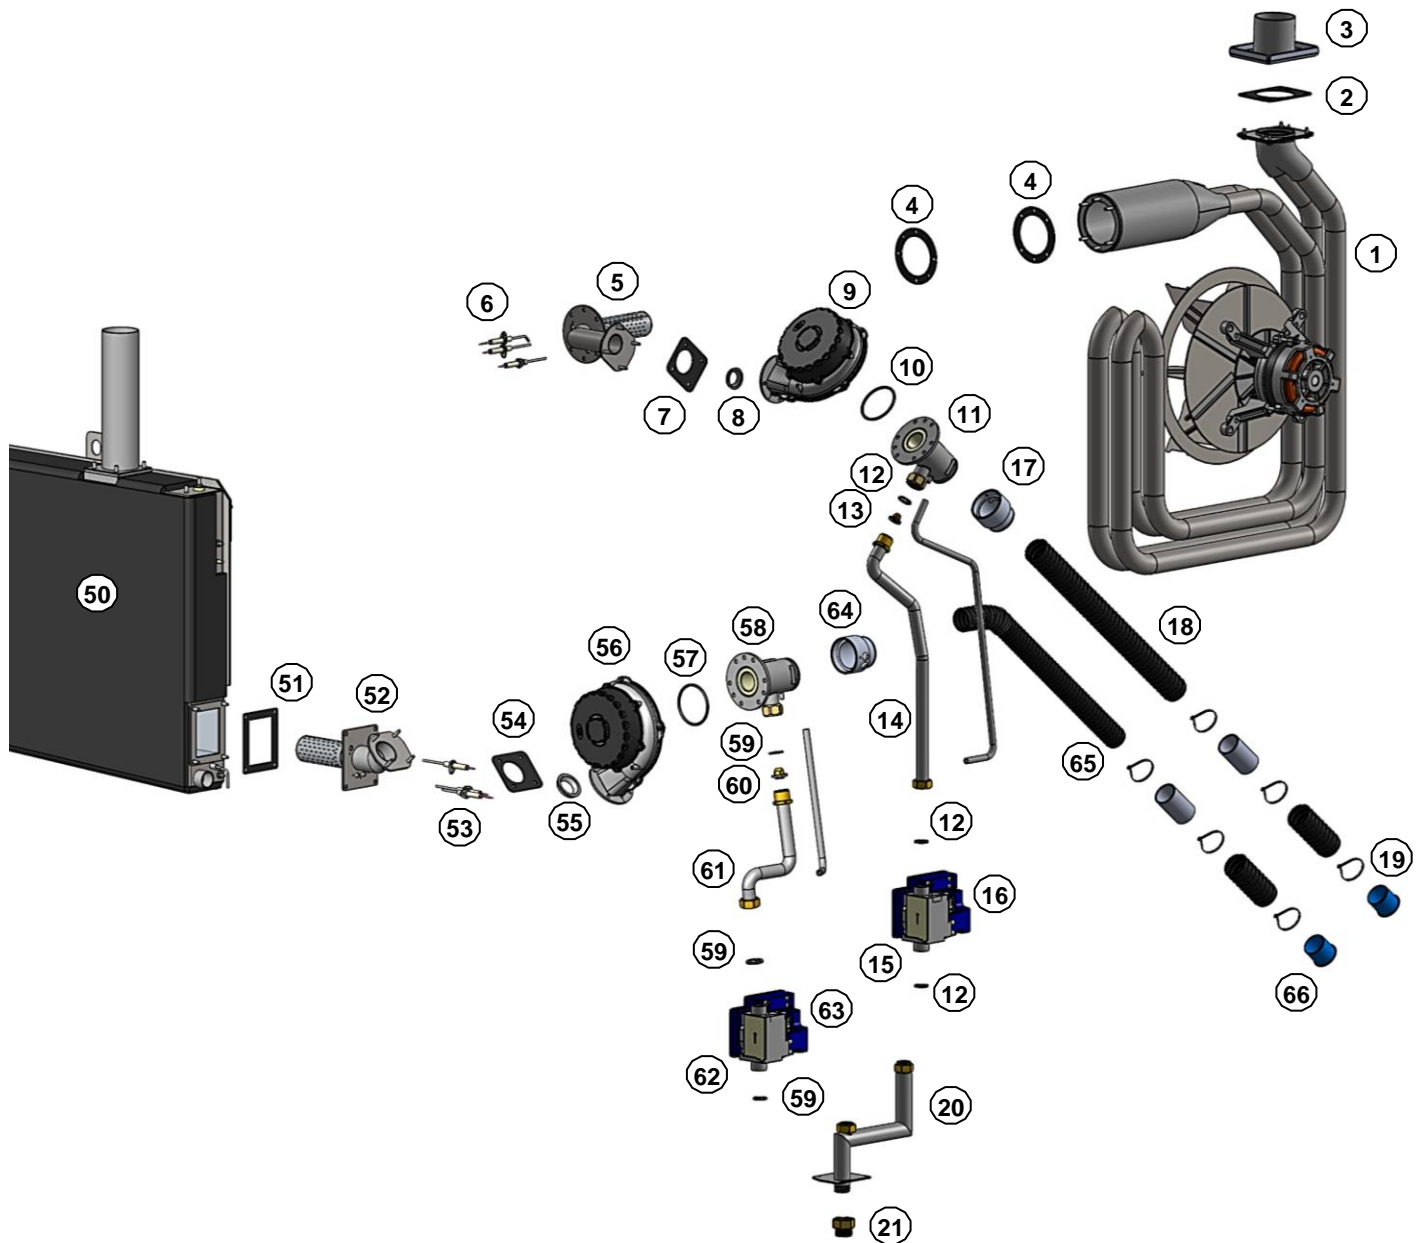**Gas circuit - Convection heating**

- 1 Heat exchanger
- 2 Gas exchanger outlet gasket
- 3 Flue gas pipe
- 4 Gas exchanger inlet gasket
- 5 Gas burner
- 6 Ignition electrodes
- 7 Gas burner gasket
- 8 Gas burner reducer
- 9 Gas burner blower
- 10 Gas venturi seal
- 11 Venturi
- 12 Gasket 20/27
- 13 Injector (present depending on model)
- 14 Gas pipework
- 15 Gas valve
- 16 Safety box
- 17 Venturi adapter
- 18 Air inlet hose
- 19 Flexible air plug
- 20 Gas ramp
- 21 3/4" NPT gas inlet adaptor

**Gas circuit - Steam heating**

- 50 Gas steam generator
- 51 Steam generator inlet gasket
- 52 Gas burner
- 53 Ignition electrodes
- 54 Gas fan gasket
- 55 Gas burner reducer
- 56 Gas burner blower
- 57 Gas venturi seal
- 58 Venturi
- 59 Gasket 20/27
- 60 Injector (present depending on model)
- 61 Gas pipework
- 62 Gas valve
- 63 Safety box
- 64 Venturi adapter
- 65 Air inlet hose
- 66 Flexible air plug

## 9. ACCESS TO COMPONENTS

### 9.1 LOCATION OF TECHNICAL COMPONENTS



### 9.2 ACCESS TO COMPONENTS




**CAUTION:** The appliance must be disconnected from its power supply during cleaning or maintenance, and when replacing parts.

The various assembly procedures and component access below are designed to avoid any repetition which could lead to errors when improving the procedures.


Actions already explained in a paragraph are not re-explained but are referred to in the paragraph originally concerned, using the symbol « ► » followed by the title of the paragraph where the procedure can be found.

#### 9.2.1 LEFT-HAND SIDE PANEL

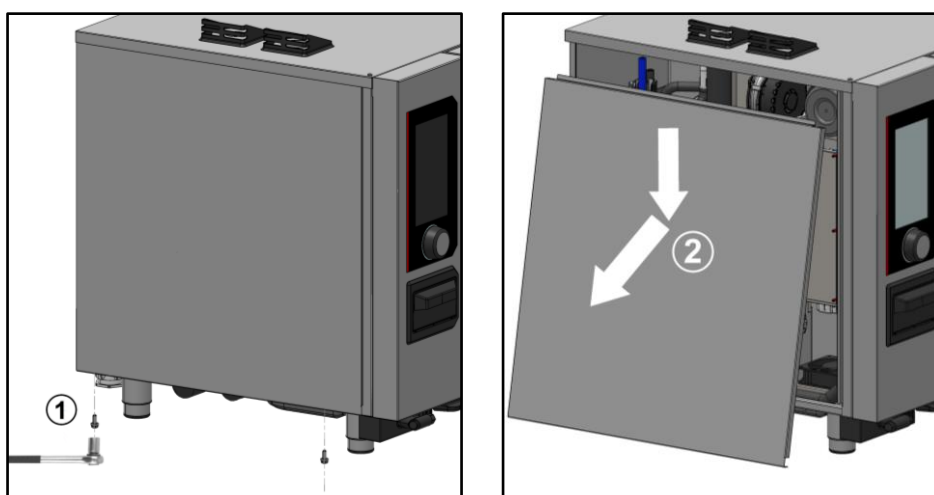


- » Prepare your intervention:
  - ✓ Tools: Wrenches.
- » Unscrew and remove the 2 x M5 screws securing the underside of the panel ①.
- » Remove the panel: Unhook the bottom of the panel and lower it to remove ②.

### 9.2.2 REAR PANEL (GAS APPLIANCE)

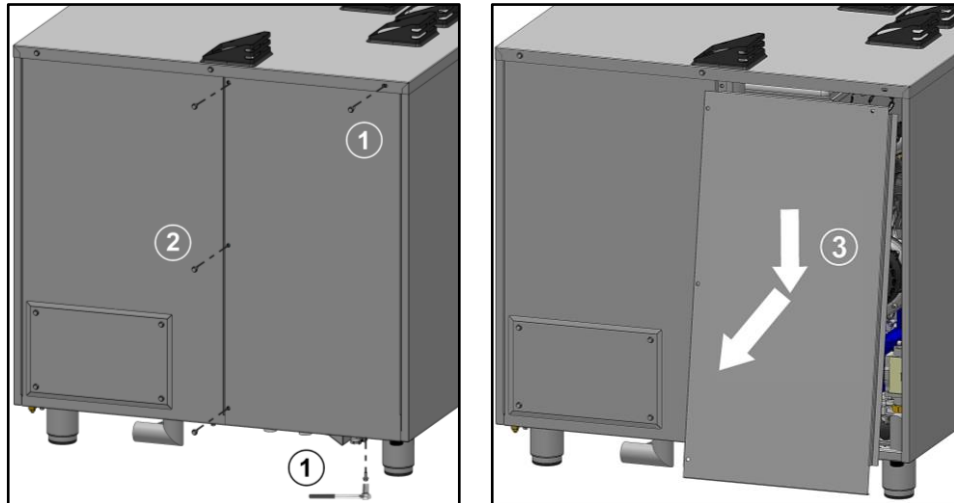

- » Prepare your intervention:
  - ✓ Tools: Wrenches.
- » Unscrew and remove the 2 x M5 screws securing the panel at the top and bottom ① and then the 3 x M5 screws securing the left-hand side of the half-panel ②.
- » Remove the half-panel: Unhook bottom of the half-panel then lower it to remove ③.

### 9.2.3 REAR HATCH (GREASE COLLECTION OPTION)

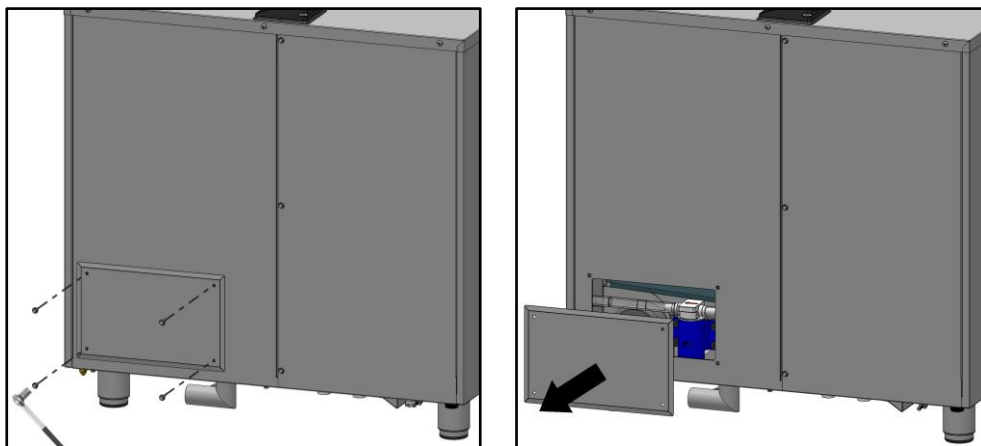

- » Prepare your intervention:
  - ✓ Tools: Wrenches.
- » Unscrew and remove the 4 x M5 screws securing the hatch cover to the rear panel.
- » Remove the hatch cover.

### 9.2.4 RUNNERS




- » Prepare the cooking cavity and check the following points:
  - ✓ Remove all trays, plates and grids from the cooking cavity
  - ✓ Verify the core probe has been removed from its housing




- ✓ Verify the USB core probe is not in the cooking cavity
- » Lift the runner slightly by the middle of one of the upper levels ①.
- » Tilt the runner towards the centre of the oven to release it from its lower supports (rear and front) ②.
- » Release the runner from its upper supports (front and rear) ③.
- » Remove the runner from cooking cavity ④.

#### 9.2.5 VENTILATION DUCT

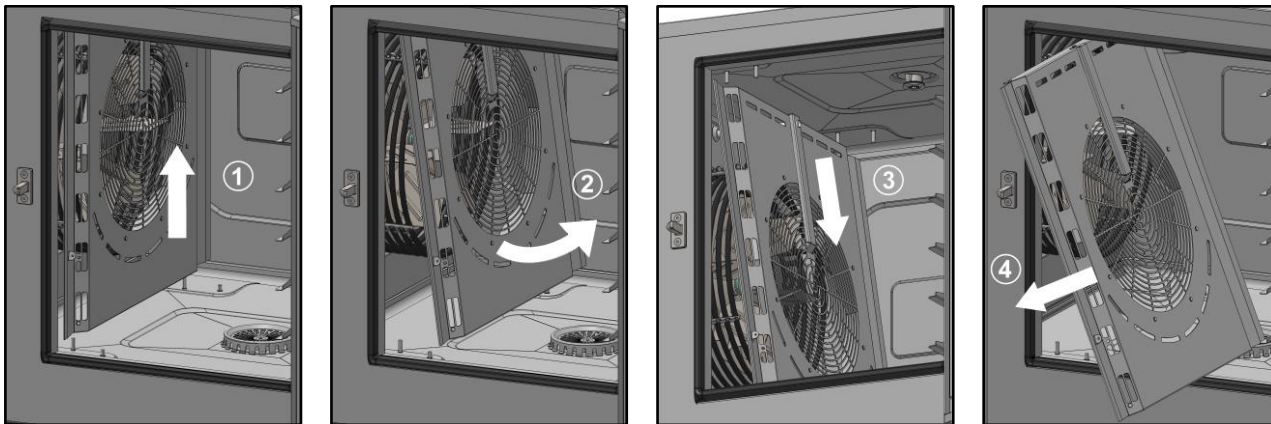

- » Prepare the cooking cavity and check the following points:
  - ✓ Remove all trays, plates and grids from the cooking cavity
  - ✓ Verify the core probe has been removed from its housing
  - ✓ Verify the USB core probe is not in the cooking cavity
  - ✓ Protect bottom of the cavity with cardboard
- » Remove left-hand runner (► [Runners](#)).
- » Lift the duct slightly ①.
- » Tilt the duct to release it from its lower supports (rear and front) ②.
- » Release the duct from its upper supports (front and rear) ③.
- » Remove the duct from the cooking cavity ④.

#### 9.2.6 MAINTENANCE POSITION OF THE MAIN BOARD

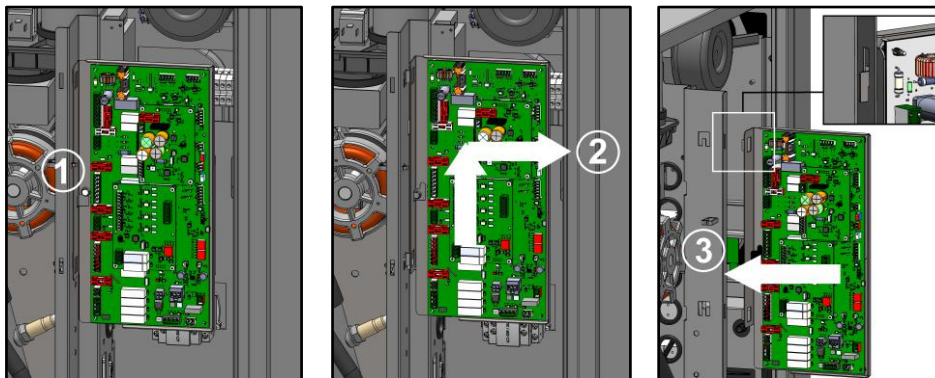


- » Prepare your intervention:
  - ✓ Tools: Wrenches
- » Remove the left oven panel (► [Left side panel](#)).
- » Slightly unscrew the screw securing the board to the electrical board ①.
- » Lift up and remove the main board ②.
- » Position the card in the 2 notches provided during maintenance operations ③.



## 10. COMPONENTS

### 10.1 ELECTRONIC BOARDS

#### 10.1.1 MAIN BOARD - Ar

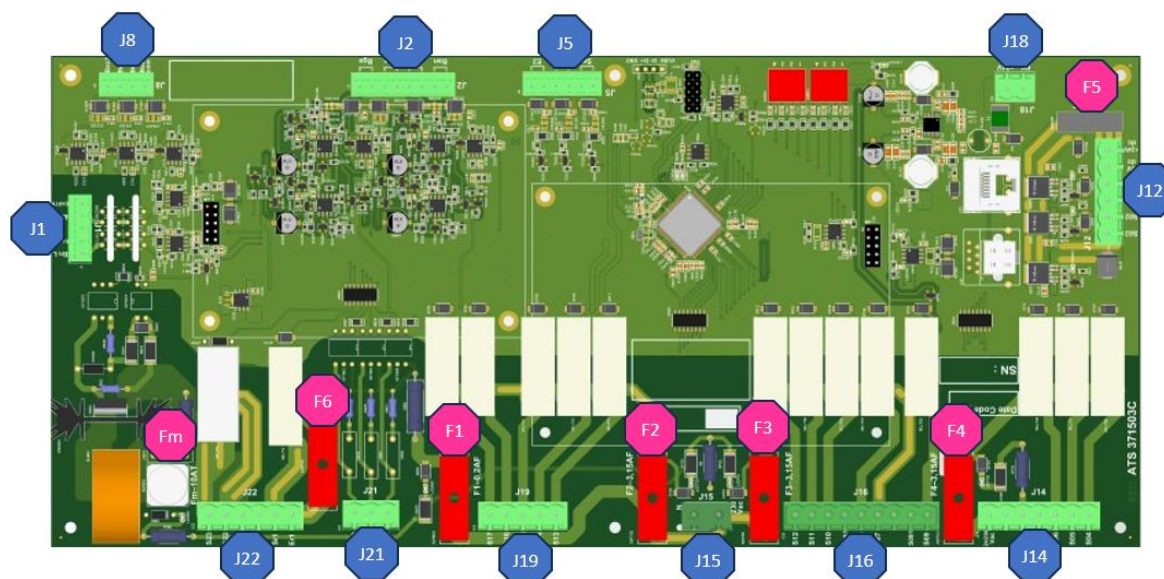


Fuse	Ref.*	Function	Caliber	Size
Fm	Fm	Ventilation motor protection	10A Time-delay	5x20
F1	F1	Solenoid valve protection	0,2A Fast	5x20
F2	F2	Wash pump solenoid valve protection	3,15A Fast	5x20
F3	F3	Protection of Heating, technical ventilation and gas board power supply	3,15A Fast	5x20
F4	F4	Pump protection	3,15A Fast	5x20
F5	F5	24Vdc service protection	4A Fast	ATC
F6	F6	Potential-free contact protection (hood)	6,3A Fast	5x20

\* References on electrical diagrams.

Connectors	Nber of terminals	Color of wires	Destination	Function of the destination elements	Measurements
J1	1	G Y	Earth	Checks the water level in the steam generator	
	2	Orange	BnC		
	3	NC		Checks the water level in the clean tank	
	4	G Y	Earth		
	5	Orange	BnL		
J2	1	White	GND (Common)	Measures the ambient temperature of the cavity (control input)	Value between 100 Ohms (35°F) and 212 Ohms (572°F)
	2	White	Ban	Measures cavity temperature (safety input)	Value between 100 Ohms (35°F) and 212 Ohms (572°F)
	3	Red	GND (Common)		
	4	Red	Baa	Measures steam generator temperature (control input)	Value between 100 Ohms (35°F) and 212 Ohms (572°F)
	5	White	GND (Common)		
	6	White	Bgn	Measures steam generator temperature (safety input)	Value between 100 Ohms (35°F) and 212 Ohms (572°F)
	7	Red	GND (Common)		
	8	Red	Bga		
J5	1	Blue	Sp	Control the closing of the door	Normally closed contact
	2	Brown	Sp		
	3		E1	Grease collection pressure switch option	
	4		E1		
	5		E2	Not used	
	6		E2		
J8	1	Yellow	GND (Common)	Food temperature control (3 levels)	Value between 100 Ohms (35°F) and 212 Ohms (572°F) Take these measures between Yellow wire and each other wire
	2	White	PT100Bsc1		
	3	Red	PT100Bsc2		
	4	Black	PT100Bsc3		
J12	1	Red	S03	Supplies the pump for the grease collection option	24Vd.c. with Tc-
	2	Red	S02	Supplies the In valve or the In valve contactor (20-level ovens only)	24Vd.c. with Tc-
		Red	S110	Supplies power to the LED lightning on the oven door (20-level ovens only)	24Vd.c. with Tc-
	4	Red	S01	Supplies power to the LED lightning on the oven door	24Vd.c. with Tc-
	5	Black	0Vd.c.	Not connected	

	6	Red	24Vd.c.	External power supply 24Vd.c. from Tc+	24Vd.c. with Tc-
<b>J14</b>	1	Purple	24/230Vac	supplies the 120Va.c pump.	120Vac with Nbt
	2	-			
	3	Blue	Nbt	common pump supply 120Va.c.( neutral)	120Vac with 24/230Vac
	4	-			
	5	Pink	Mdg	activates the descaling pump 120Vac	120Vac with Nbt
	6	Brown	Mvm	activates the 120Vac cavity drain pump	120Vac with Nbt
	7	Purple	Mvg	activates the steam generator drain pump 120Vac	120Vac with Nbt
<b>J15</b>	1	Blue	Neutral	Supplies the 230Vac outputs	230Va.c. between these two points
	2	Purple	230Vac		
<b>J16</b>	1	Brown	Chauf Vap-S12	In an electric oven, activate the Kg steam generator heating contactor(s)	230Va.c. with neutral
		Red		In a gas oven, activates the steam generator burner	
	2	Red	Chauf 2-S11	Not used in an electric oven In a gas oven, activates the heating burner (only 20 level oven)	230Va.c. with neutral
	3	Pink	Chauf 1-S10	In an electric oven, activate the Kr (green) control contactor(s)	230Va.c. with neutral
		Red		In a gas oven, activate the heating burner	
	4	Orange	S081	In a gas oven, supplies the gas solenoid valves	230Va.c. with neutral
	5	Purple	Mtv1 - S08	Activates technical ventilation	230Va.c. with neutral
	6	Orange	Aag 230V - S07	Not used in electric ovens Supplies the gas board of gas ovens	230Va.c. with neutral
	7	-	-		-
	8	Orange	XeA-S091	Controls the energy saver (electric oven) Controls the second technical ventilation	230Va.c. with neutral
		W1- 3		Controls the rotation speed of the hood	
<b>J18</b>	9	Brown	S09	Activates the power contactor(s) Kp	230Va.c. with neutral
	1	Black	+24VSyst	24Vd.c. power supply for Main board	24Vd.c. between 1 and 2
<b>J19</b>	2	Red	0VSyst		
	1	Reserve	S17	Reserved	
	2	Brown	Ytd - S16	Activates the powder dissolution solenoid valve	230Va.c. with neutral
	3	Pink	Ys - S15	Activates the spray hose solenoid valve	230Va.c. with neutral
	4	-	-	-	
<b>J21</b>	5	Purple	Clean pump – S13	Activates the clean pump	230Va.c. with neutral
	1	Green	Yrc- S20	Activates the injection solenoid valve	230Va.c. with neutral
	2	Brown	Yr - S19	Activates the cooling solenoid valve	230Va.c. with neutral
	3	Green	Yc - S18	Activates the condenser solenoid valve	230Va.c. with neutral
<b>J22</b>	1	Black	E23	Activates clockwise motor rotation	208Va.c. with Xm0 for 208Va.c. oven 240Va.c. with Xm0 for 240Va.c. oven 230Va.c. with Xm0 for 480Va.c. oven
	2	Red	E22	Activates anticlockwise motor rotation	208Va.c. with Xm0 for 208Va.c. oven 240Va.c. with Xm0 for 240Va.c. oven 230Va.c. with Xm0 for 480Va.c. oven
	3	Black	E21	Supplies power to the motor	208Va.c. with Xm0 for 208Va.c. oven 240Va.c. with Xm0 for 240Va.c. oven 230Va.c. with Xm0 for 480Va.c. oven
	4	-	-	-	
	5	W1-2	Sr1	Potential-free contact for hood motor control	Closed when the oven is operating
	6	W1-1	Er1		

10.1.2 HUMIDITY BOARD - Ahu

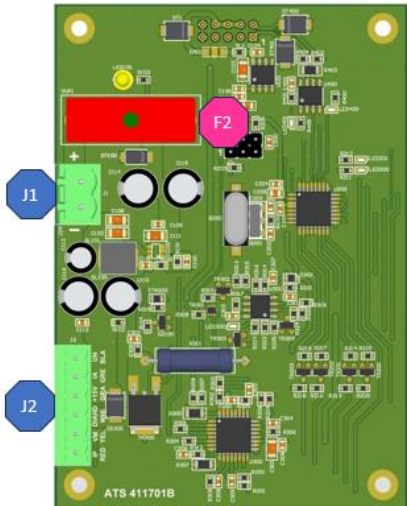


Fuse	Ref.*	Function	Caliber	Size
F2	F2	Protect Humidity board	2A Fast	5X20

\* References on electrical diagrams.

Connectors	Nber of terminals	Color of wires	Destination	Function of the destination elements	Measurements
J1	1	Black	Ahu/-	Moisture card power supply	24Vdc between these two points
	2	Red	Ahu/+		
J2	1	Red	Ah Red	Supply humidity probe, heater unit and probe feedback	
	2	Orange	Ah Yel		
	3	White	AhWhi		
	4	Grey	Ah Gre		
	5	Purple	Ah Pur		
	6	Black	Ah Blk		


10.1.3 GAS BOARD - Aag

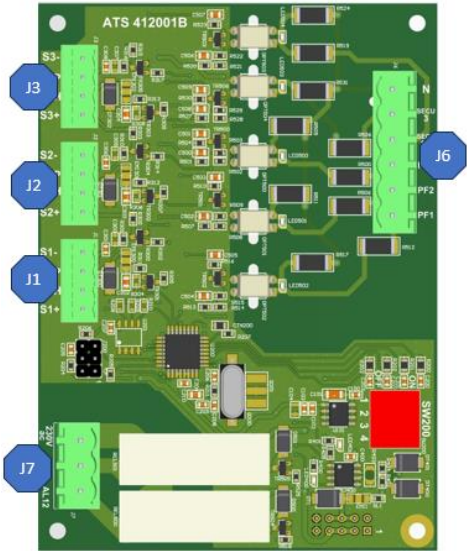

Connectors	Nber of terminals	Color of wires	Destination	Function of the destination elements	Measurements
J1	1	Black	GND/Alim- PWM	Convection heat burner fan control	
	2	Pink	S1P/PWM input		
	3	Orange	S1H/PWM Hall probe output		
	4	Red	+24Vdc/Alim+PWM		
J2	1	Black	GND/Alim- PWM	Convection heat burner fan control only 20 levels	
	2	Pink	S2P/PWM input		
	3	Orange	S2H/PWM Hall probe output		
	4	Red	+24Vdc/Alim+PWM		


<b>J3</b>	<b>1</b>	Black	GND/Alim- PWM		
	<b>2</b>	Pink	S1P/PWM input	Steam generator burner fan control	
	<b>3</b>	Orange	S1H/PWM Hall probe output		
	<b>4</b>	Red	+24Vdc/Alim+PWM		
<b>J6</b>	<b>1</b>	Purple	Pf1	Flame and safety burner check	Flame control feedback at 230Va.c.
	<b>2</b>	Purple	Pf2		
	<b>3</b>	Brown	Pf3		
	<b>4</b>	Red	Secu 12		
	<b>5</b>	Grey	Secu3		
	<b>6</b>	Blue	Neutral		
<b>J7</b>	<b>1</b>	Brown	230Vac	Burner ignition control	230Va.c. between 230Va.c. and Xb
	<b>2</b>	Purple	Alum 1/2		
	<b>3</b>	Brown	AI 3		

## 10.1.4 INTERFACE BOARD - Ai

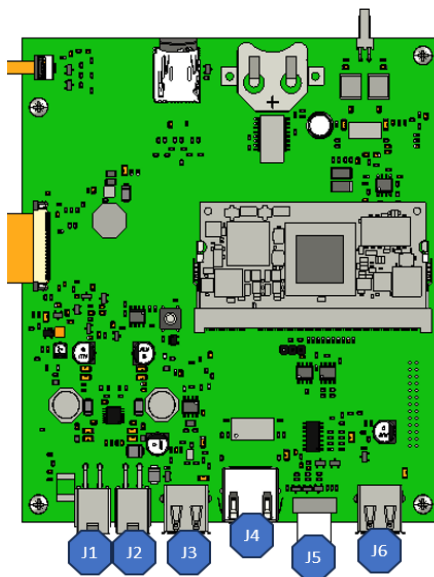

Connectors	Nber of terminals	Connectors type	Destination	Function of the destination elements	Measurements
<b>J1</b>		4-pin Molex connector		Not used	
<b>J2</b>		4-pin Molex connector		Connects to the Main board	
<b>J3</b>		USB		Connects the WIFI Dongle (Kit)	
<b>J4</b>		RJ45		Ensures customer network connection for connectivity	
<b>J5</b>		10-way ribbon connector 1.27mm pitch AWG28		Connects coder board to interface board	
<b>J6</b>		USB		Connects front USB socket	


## 10.1.5 CODER BOARD - Ac




Connectors	Nber of terminals	Connectors type	Destination	Function of the destination elements	Measurements
<b>J1</b>		10-way ribbon cable 1.27mm pitch AWG 28		Connects coder board to the interface board	

## 10.2 ELECTRIC BOARDS

Electric ovens

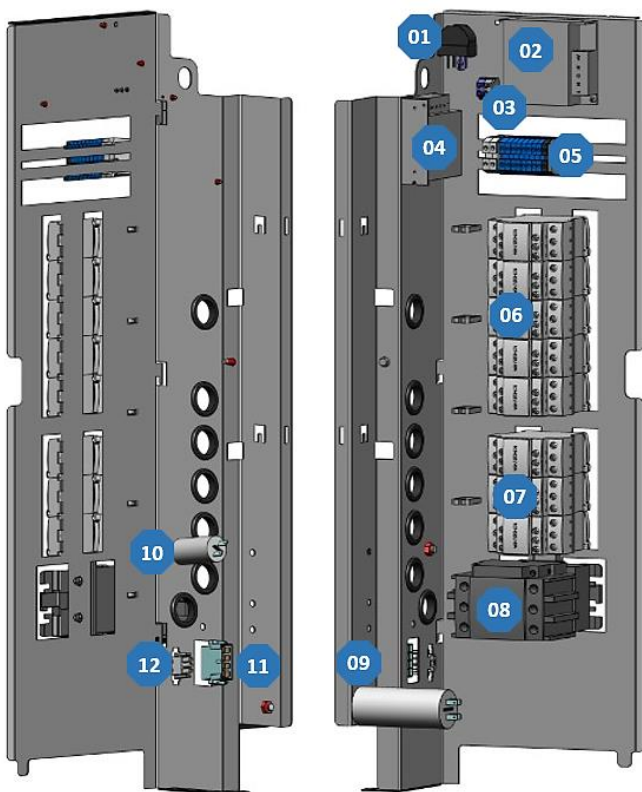

Gas ovens

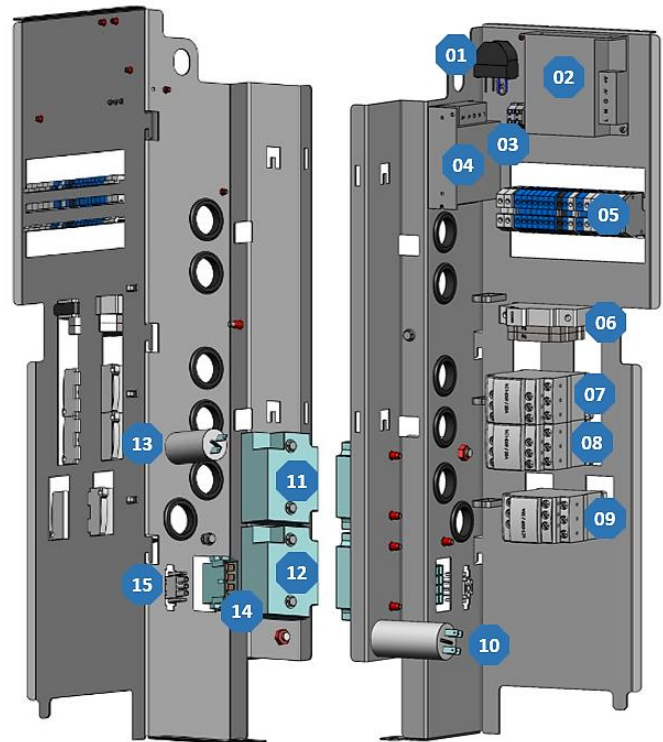

Electric ovens

Item	Ref.*	Description	Functions
1	La	EMC filter	Limits electromagnetic interference
2	Ta	Switching power supply	Supplies 24Vdc to services (lighting, In valve solenoid, grease gun)
3	Xe	Lighting terminal block	Connects LED strips for oven lighting
4	Tc	Switching power supply	Supplies 24Vdc to the Main board
5	X	Terminal block (Xa, Xb, X+, X-, Xm0, Xm1)	Connects the various power supplies
6	Kr	Convection heat control contactor	Supplies the heating elements with convection heat
7	Kg	Steam generator heating contactor	Supplies steam generator immersion heaters
8	Kp	Power contactor	Controls power to the oven
9	Cvm	Cooling fan	Starts the cooling fan
10	Cpl	Wash pump capacitor	Starts the wash pump
11	Xmv	Fan motor connector	Connects the fan motor to the board
12	Xpl	Wash pump connector	Connects the wash pump to the board

\* References on electrical diagrams.

Gas ovens

Item	Ref.*	Description	Functions
1	La	EMC filter	Limits electromagnetic interference
2	Ta	Switching power supply	Supplies 24Vdc to services (lighting, In valve solenoid, grease gun)
3	Xth	Lighting terminal block	Connects LED strips for oven lighting
4	Tc	Switching power supply	Supplies 24Vdc to the PLC board
5	X	Terminal block (Xa, Xb, X+, X-, Xm0, Xm1)	Connects the various power supplies
6	F	Protections (Ftco, Ftvb, Ftmv)	Protects the transformer and fan motor outputs (US model only)
7	Kr	Convection heating control switch	Controls the convection heater burner control board (1 or 2 depending on the oven model)
8	Kg	Steam generator contactor	Controls the steam burner regulation card
9	Kp	Power contactor	Controls power to the oven
10	Cm	Cavity fan capacitor	Starts the cavity ventilation motor
11	Ear	Convection heating ignition transformer	Ignites the convection burner electrode (1 or 2 depending on the oven model)
12	Eag	Steam generator ignition transformer	Ignites the steam generator burner electrode
13	Cpn	Wash pump capacitor	Starts the wash pump
14	Xm	Fan motor connector	Connects the fan motor to the board
15	Xpn	Wash pump connector	Connects the wash pump to the board

\* References on electrical diagrams.



### 10.3 OTHER COMPONENTS

#### 10.3.1 ELECTRIC OVENS



Item	Ref.*	Description	Functions
2	Tco	Control auto transformer	(On certain models only) Ensures that customer voltage can be matched to oven operating voltages
2	Ai	Interface board	Human-machine interface
3	Ac	Encoder board	Human-machine interface
4	Ar	Main board	Control all oven components
5	-	Electrical board	Provides the link between Main board commands and the functions of external components
6		Descaling box	Contains descaling powder
7	Mt1-2	Technical fan	Ensure forced ventilation of the technical compartment
8	-	Spray hose reel	Contains spray hose reel
9	Mdg	Steam generator descaling pump	Ensures circulation of steam generator descaling agent
10	Shu	Humidity sensor	Humidity control
11	M1	Cavity fan motor	Ensures turbine rotation
12	Lo	Air inlet valve	Controls air inlet valve movements
13	Rc	Convection heating elements	Heats the inside of the cavity (several depending on model)
14	Mvg	Steam generator drain pump	Drain water from steam generator
15	Mpn	Cleaning pump	Ensures water circulation during cleaning phases
16	Mvm	Cavity drain pump	Ensures the draining of liquid elements contained in the cavity
17	Bnl	Clean box water level probe	Controls water level in clean box
18	Xp	Power terminal block	Allows the oven to be connected to the customer's electrical network
19	Rg + Bg	Steam generator immersion heater + Temperature probe	Heats the water contained in the steam generator, the sensor controls the water temperature in the steam generator (safety and regulation circuits).
20	Bnc	Steam generator water level probe	Controls water level in steam generator
21	-	Steam generator	Produce steam
22	Yr - Yrc - Ytd	Triple solenoid valve	Controls filtered water supply cooling, steam generator filling and descaling
23	Ys - Yc	Double solenoid valve	Controls unfiltered water inlet for spray hose and condenser
24	-	Clean box	Collects liquid elements contained in the cavity
25	Tmv	Cavity fan motor autotransformer	(On some models only) Adapts customer voltage to the voltage used by the cavity fan motor
26	-	USB socket	Allows connection of a USB key for updates, backups, etc.
27	-	Spray hose	Cleans the oven
28	Ba	Cavity temperature probe	Controls oven cavity temperature (safety circuits and regulation)
29	M1	Fan	For even heat distribution
30	Bsc	3-point food core probe	Allows food temperature to be taken
31	Ee1 – Ee2	LED strips	Provide interior oven lighting (number depends on model)
<b>Grease collection option</b>			
32	P	Pressure switch	Check no over pressure in the circuit.
33	Mpg	Grease pump	Drain grease from the cavity.

\*References on electrical diagrams.

## 10.3.2 GAS OVENS



Item	Ref.*	Description	Functions
1	Tco	Control auto transformer	(On certain models only) Ensures that customer voltage can be matched to oven operating voltages
2	Ai	Interface board	Human-machine interface
3	Ac	Encoder board	Human-machine interface
4	Ar	Main board	Controls all oven components
5	-	Descaling box	Contains descaling powder
6	Mt1	Technical fan	Ensures forced ventilation of the technical compartment
7	-	Spray hose reel	Contains spray hose reel
8	Mdg	Steam generator descaling pump	Ensures circulation of steam generator descaling agent
9	Shu	Humidity sensor	Humidity control
10	-	Electrical board	Provides the link between Main board commands and the functions of external components
11	M1	Cavity fan motor	Ensures turbine rotation
12	Lo	Air inlet valve	Controls air inlet valve movements
13	Mbr	Convection-heating burner motor	Supplies oxygen to the flame
14	Mbg	Steam generator burner motor	Supplies oxygen to the flame
15	Avr-1	Connection box of solenoid valve for convection gas heating	Controls the solenoid valve for the gas supply to the convection-heating burner
16	Mpn	Cleaning pump	Ensures water circulation during cleaning phases
17	Mvm	Cavity drain pump	Ensures the draining of liquid elements contained in the cavity
18	Bnl	Clean box water level probe	Controls water level in clean box
19	Avg	Connection box of solenoid valve for steam generator gas control	Controls the solenoid valve of the gas supply to the steam generator burner
20	Xp	Power terminal block	Allows the oven to be connected to the customer's electrical network
21	Yr,Yrc,Ytd	Triple solenoid valve	Controls filtered water supply cooling, steam generator filling and descaling
22	Ys,Yc	Double solenoid valve	Controls infiltrated water inlet for spray hose and condenser
23	-	Clean box	Collects liquid elements contained in the cavity
24	Mvg	Steam generator drain pump	Drain water from steam generator
25	Bg	Steam generator temperature probe	Controls temperature of the water in the steam generator (safety circuit and regulation)
26	Bnc	Steam generator level probe	Controls water level in steam generator
27	-	Steam generator	Produce steam
28	Tmv	Cavity fan motor autotransformer	(On some models only) Adapts customer voltage to the voltage used by the cavity fan motor
29	-	USB socket	Allows connection of a USB key for updates, backups, etc.
30	-	Spray hose	Cleans the oven
31	Ba	Cavity temperature probe	Controls oven cavity temperature (safety circuit and regulation)
32	M1	Fan	For even heat distribution
33	-	Gas exchanger	Heats the oven interior
34	Bsc	3-point food core probe	Allows food temperature to be taken
35	Ee1, Ee2	LED strips	Provide interior oven lighting (number depends on model)
<b>Grease collection option</b>			
32	P	Pressure switch	Check no over pressure in the circuit.
33	Mpg	Grease pump	Drain grease from the cavity.

\*References on electrical diagrams.

## 11. RECOMMENDED AND EMERGENCY SPARE PARTS

Code	Vulcan Code	Description	Category
145587	00-978271	Drive shaft gasket + wear ring	Wearing Part
147147	00-978272	120W UL Motor service kit + ring + gasket	Recommended Part
148885	00-978275	Arched ignition electrode	Wearing Part
148886	00-978276	Straight Ionisation electrode	Wearing Part
148889	00-978277	Flame control electrode	Recommended Part
159005	00-978291	ICS24-61E - Service Kit Heating element 11.2kW 240V	Recommended Part
159007	00-978292	ICS24-6~102E - Service Kit Heating elem. 23.5kW 240V	Recommended Part
159008	00-978293	ICS24-101E - Service Kit Heating element 19.6kW 240V	Recommended Part
159009	00-978294	ICS24-102E - Service Kit Heating element 15.2kW 240V	Recommended Part
159010	00-978295	ICS24-101E - Service Kit Heating element 10.3KW 400V	Recommended Part
159012	00-978296	ICS24-6~102E - Service Kit Heating elem. 21.6kW 208V	Recommended Part
159013	00-978297	ICS24-101E - Service Kit Heating element 18kW 208V	Recommended Part
159014	00-978298	ICS24-102E - Service Kit Heating element 14kW 208V	Recommended Part
159015	00-978299	ICS24-61E - Service Kit Heating element 10.3kW 277V	Recommended Part
159017	00-978300	ICS24-6~102E - Service Kit Heating elem. 21.6kW 277V	Recommended Part
159018	00-978301	ICS24-101E - Service Kit Heating element 18.0kW 480V	Recommended Part
159019	00-978302	ICS24-102E - Service Kit Heating element 14kW 277V	Recommended Part
159022	00-978303	ICS24-61E - Service Kit Immersion heater 9,8kW 240V	Recommended Part
159023	00-978304	ICS24-6~10E - Service Kit Immersion heater 19.1kW 240V	Recommended Part
159024	00-978305	ICS24-61E - Service Kit Immersion heater 9kW 208V	Recommended Part
159025	00-978306	ICS24-6&10E Service Kit Immersion heater 17,5kW 208V	Recommended Part
159026	00-978307	ICS24-61E - Service Kit Immersion heater 9kW 277V	Recommended Part
159027	00-978308	ICS24-6~10E - Service Kit Immersion heater 17.5kW 277V	Recommended Part
159028	00-978309	ICS24-6&10E - Service Kit Temperature sensor	Recommended Part
159030	00-978311	ICS24 - Service Kit Ambient sensor	Recommended Part
159032	00-978313	ICS24 GN21 - Service Kit Motor	Recommended Part
159046	00-978325	ICS24-G- Service kit Gas fan NG40	Recommended Part
159048		ICS24-61 - Service Kit Core temperature probe	Recommended Part
159049		ICS24-102 - Service Kit Core temperature probe	Recommended Part
159050		ICS24-62&101 - Service Kit Core temperature probe	Recommended Part
159064		ICS24 - Service Kit Pressure switch	Recommended Part
300697	00-978327	Three-pole 25A 230V 50/60 Hz contactor	Recommended Part
300698	00-978328	Three-pole 32A 230V 50/60 Hz contactor	Recommended Part
300699	00-978329	Three-pole 40A 230V 50/60 Hz contactor	Recommended Part
300702	00-978330	Tree-pole 80A 230V 50/60 HZ contactor	Recommended Part
300769	00-978331	Anti-interference relay	Recommended Part
300787	00-978332	Ultra fast fuse 0.2A 250V 5 x 20	Recommended Part
300790		SHURTER fuse 2A 250V FSF 5 x 20	Recommended Part
300793	00-978334	600VAC fuse 10A 10.3 x 38.1	Recommended Part
300798	00-978335	Three-pole contactor 125A 230V 50/60 HZ	Recommended Part
300799	00-978336	Block RC LA4DA2U	Recommended Part
300801	00-978337	Glass fuse 4A	Recommended Part
300802	00-978338	Integrated switching power supply	Recommended Part
300805	00-978339	ICS24 - Door reed	Recommended Part
300806	00-978340	ICS24 - Door reed	Recommended Part
301514	00-978341	ICS24-6&10E - Boiler level sensor	Recommended Part
301515	00-978342	ICS24 - Humidity probe	Recommended Part
301519	00-978345	ICS24 - Wash box level probe	Recommended Part
301520	00-978346	ICS24-102E - Boiler level sensor	Recommended Part
304296		Condenser 12.5µf	Recommended Part
304314		Grease pump and fitting for hose diameter13	Recommended Part
304317	00-978350	ICS24 61E - Fan wheel	Recommended Part
304321	00-978351	ICS24 - Descaling pump 120V 60HZ 20L/min	Recommended Part
304322	00-978352	ICS24 - Drain pump wash box 120V 60HZ 20L/min	Recommended Part
304323	00-978353	ICS24 - Drain pump boiler 120V 60HZ 20L/min	Recommended Part
304326	00-978354	ICS24 GN21 - Capacitor 20µ	Recommended Part
304328	00-978355	ICS24 61G 101E - Fan wheel 320	Recommended Part
304329	00-978356	ICS24 62E 101G - Fan wheel 340	Recommended Part
304330	00-978357	ICS24 62G 102E - Fan wheel 370	Recommended Part
304331		ICS24 102G TURBINE 390	Recommended Part
304334	00-978358	ICS24 - Fan UL 230V 120 x 120 x 38 mm	Recommended Part
308353	00-978370	ICS24 - Switching power supply 24V 35W	Recommended Part
309407	00-978371	Fuse 3.15 Amps	Recommended Part
309608	00-978372	Filter with connection for gas oven	Recommended Part
309714	00-978375	FastPad 3 Interface Unit	Recommended Part
309716	00-978376	FastPad 3 Illuminated Optical Encoder	Recommended Part



Code	Vulcan Code	Description	Category
<b>309717</b>	00-978377	FastPad 3 Gas board	Recommended Part
<b>309718</b>	00-978378	FastPad 3 Humidity board	Recommended Part
<b>309719</b>	00-978379	Led Strip 4000K 24V	Recommended Part
<b>309720</b>	00-978380	Automate board + Humidity board	Recommended Part
<b>309725</b>	00-978383	SELF common mode 2x10	Recommended Part
<b>310356</b>	00-978385	Security box	Recommended Part
<b>310358</b>	00-978386	Electromagnet GY030 24V	Recommended Part
<b>311356</b>	00-978387	LED strip label	Wearing Part
<b>311361</b>	00-978388	LED strip protective film	Recommended Part
<b>314396</b>	00-978392	UL Wash pump	Recommended Part
<b>316192</b>		Transparent TPE-S AL Hose 12.7 x 20.1mm	Wearing Part
<b>366068</b>		Transparent silicone tube	Wearing Part
<b>366572</b>	00-978425	Door stop	Wearing Part
<b>366683</b>	00-978428	Outlet seal exchanger 6/10 levels	Wearing Part
<b>366685</b>	00-978429	Gas fan gasket	Wearing Part
<b>366688</b>		FKM gasket 17,12x2,62mm	Wearing Part
<b>366698</b>	00-978432	ICS24-61 - Cooking cabinet gasket	Wearing Part
<b>366699</b>	00-978433	ICS24-62 - Cooking cabinet gasket	Wearing Part
<b>366700</b>	00-978434	ICS24-101 - Cooking cabinet gasket	Wearing Part
<b>366701</b>	00-978435	ICS24-102 - Cooking cabinet gasket	Wearing Part
<b>366711</b>	00-978441	ICS24 - Gasket In flap	Wearing Part
<b>366712</b>	00-978442	ICS24-GN11E - Immersion heater gasket	Wearing Part
<b>384183</b>	00-978471	Door closure mechanism	Recommended Part
<b>384677</b>	00-978472	Moulded door catch	Wearing Part
<b>407002</b>		Anti-parasite module	Recommended Part
<b>408402</b>	00-978509	Gas ignition	Recommended Part
<b>408407</b>		Auto Transformer 415 VA	Recommended Part
<b>416003</b>	00-978513	ICS24 - Hand shower kit	Wearing Part
<b>468105</b>	00-978545	ICS24 - Sub-assembly UL 2-way solenoid valve	Recommended Part
<b>468107</b>	00-978546	ICS24 - Sub-assembly UL 3-way solenoid valve	Recommended Part

## 12. COMBUSTION GAS ANALYSIS PROCEDURE

### WHO (can carry out this procedure):

Expert Technician (Trained on Combis – Trained for this Procedure)

### EQUIPMENT (tool required):

Combustion Analyzer, complying with the local regulations, and:

- Analyzer technology should be with onboard CO<sub>2</sub> probe (direct measure)
- If analyzer technology doesn't have a CO<sub>2</sub> probe (%CO<sub>2</sub> = calculation), check that the correct gas has been set in the analyzer, for the measure (mandatory for correct calculation)

### WHEN (to do this procedure):

To switch from one gas to another

After changing Key Gas components as: Burner, Valve, Motor, Jet and exchanger

### Procedure:

**CO2 CONTROL**

1. GAS

START

1/16

CAVITY CONTROL:

2. Place the CO<sub>2</sub> control probe in the cavity exchanger chimney & open the door. Press CONTINUE when ready.

CONTINUE

2/16

CONTROL / ADJUSTMENT 1 (small speed)

3. Wait for the CO<sub>2</sub> value to stabilize. CO<sub>2</sub> measurement must be at the value (see documentation) depending on model & energy ± 0.2%.

4. If not OK, adjust the CO<sub>2</sub> value with the screw (see procedure/documentation), wait again for stabilization and correct value. VALIDATE when OK.

VALIDATE

3/16

CONTROL / ADJUSTMENT 2 (small speed)

5. Wait for the CO<sub>2</sub> value to stabilize. CO<sub>2</sub> measurement must be at the value (see documentation) depending on model & energy ± 0.2%.

6. If not OK, adjust the CO<sub>2</sub> value with the screw (see procedure/documentation), wait again for stabilization and correct value. VALIDATE when OK.

VALIDATE

4/16

CONTROL / ADJUSTMENT 3 (small speed)

7. Wait for the CO<sub>2</sub> value to stabilize. CO<sub>2</sub> measurement must be at the value (see documentation) depending on model & energy ± 0.2%.

8. If not OK, adjust the CO<sub>2</sub> value with the screw (see procedure/documentation), wait again for stabilization and correct value. VALIDATE when OK.

VALIDATE

5/16

CONTROL / ADJUSTMENT 1 (high speed)

9. Wait for the CO<sub>2</sub> value to stabilize. CO<sub>2</sub> measurement must be at the value (see documentation) depending on model & energy ± 0.2%.

10. If not OK, adjust the CO<sub>2</sub> value with the screw (see procedure/documentation), wait again for stabilization and correct value. VALIDATE when OK.

VALIDATE

6/16

CONTROL / ADJUSTMENT 2 (high speed)

11. Wait for the CO<sub>2</sub> value to stabilize. CO<sub>2</sub> measurement must be at the value (see documentation) depending on model & energy ± 0.2%.

12. If not OK, adjust the CO<sub>2</sub> value with the screw (see procedure/documentation), wait again for stabilization and correct value. VALIDATE when OK.

VALIDATE

7/16

CONTROL / ADJUSTMENT 3 (high speed)

13. Wait for the CO<sub>2</sub> value to stabilize. CO<sub>2</sub> measurement must be at the value (see documentation) depending on model & energy ± 0.2%.

14. If not OK, adjust the CO<sub>2</sub> value with the screw (see procedure/documentation), wait again for stabilization and correct value. VALIDATE when OK.

VALIDATE

8/16

BOILER CONTROL:

15. Place the CO<sub>2</sub> control probe in the boiler chimney & open the door. Press CONTINUE when ready.

CONTINUE

9/16

CONTROL / ADJUSTMENT 1 (small speed)

16. Wait for the CO<sub>2</sub> value to stabilize. CO<sub>2</sub> measurement must be at the value (see documentation) depending on model & energy ± 0.2%.

17. If not OK, adjust the CO<sub>2</sub> value with the screw (see procedure/documentation), wait again for stabilization and correct value. VALIDATE when OK.

VALIDATE

10/16

CONTROL / ADJUSTMENT 2 (small speed)

18. Wait for the CO<sub>2</sub> value to stabilize. CO<sub>2</sub> measurement must be at the value (see documentation) depending on model & energy ± 0.2%.

19. If not OK, adjust the CO<sub>2</sub> value with the screw (see procedure/documentation), wait again for stabilization and correct value. VALIDATE when OK.

VALIDATE

11/16

CONTROL / ADJUSTMENT 3 (small speed)

20. Wait for the CO<sub>2</sub> value to stabilize. CO<sub>2</sub> measurement must be at the value (see documentation) depending on model & energy ± 0.2%.

21. If not OK, adjust the CO<sub>2</sub> value with the screw (see procedure/documentation), wait again for stabilization and correct value. VALIDATE when OK.

VALIDATE

12/16

CONTROL / ADJUSTMENT 1 (high speed)

22. Wait for the CO<sub>2</sub> value to stabilize. CO<sub>2</sub> measurement must be at the value (see documentation) depending on model & energy ± 0.2%.

23. If not OK, adjust the CO<sub>2</sub> value with the screw (see procedure/documentation), wait again for stabilization and correct value. VALIDATE when OK.

VALIDATE

13/16

CONTROL / ADJUSTMENT 2 (high speed)

24. Wait for the CO<sub>2</sub> value to stabilize. CO<sub>2</sub> measurement must be at the value (see documentation) depending on model & energy ± 0.2%.

25. If not OK, adjust the CO<sub>2</sub> value with the screw (see procedure/documentation), wait again for stabilization and correct value. VALIDATE when OK.

VALIDATE

14/16

CONTROL / ADJUSTMENT 3 (high speed)

26. Wait for the CO<sub>2</sub> value to stabilize. CO<sub>2</sub> measurement must be at the value (see documentation) depending on model & energy ± 0.2%.

27. If not OK, adjust the CO<sub>2</sub> value with the screw (see procedure/documentation), wait again for stabilization and correct value. VALIDATE when OK.

VALIDATE

15/16

END

16/16

**The probe must be inserted into the gas chimney for valid combustion values**

**The probe must be inserted into the gas chimney for valid combustion values**

Prepare your check:

- ✓ Oven is connected to the water and wastewater systems, the electrical system and the gas supply line in accordance with the recommendations and guidelines described in this manual.
- ✓ Measuring instrument for monitoring carbon dioxide CO<sub>2</sub> and carbon monoxide CO.
- » Set the measuring instrument to "CO<sub>2</sub>" for a calculation result of "CO<sub>2</sub> rate in %".

- » From the "Home" menu screen, select "Settings" button.
- » The screen displays the "Parameters" menu with the "User" tab selected.
- » Select "Service" tab.
- » The PIN code identification pop-up appears.
- » Enter the PIN code to access "Service" parameters (► [Codes PIN](#)).
- » Confirm by pressing "✓" icon. If the code is correct, access to the screen is authorised; if not, return to entering the PIN code.
- » The screen displays the "Parameters" menu with the "Service" tab displayed.
- » Press "CO<sub>2</sub> control & adjustment" button.
- » Confirm by pressing « ✓ » icon.
- » The "CO<sub>2</sub> control" screen appears.
- » Verify gas type matches the oven's supply gas.
- » Start test by pressing the "Start" button.
- » Place probe of the gas testing appliance in the cooking cavity flue gas chimney.
- » Open the oven door.
- » Press "Continue" button.
- » Follow the information displayed on the oven screen and confirm by pressing « ✓ » icon if the measurement values are correct.
- » The percentage of CO<sub>2</sub> measured must correspond within +/- 0.2% to the required value for the gas type in the table below.
- » Each check is performed on 3 measurement readings.



Burner Convection heat	CO <sub>2</sub> (%) – Low speed			
	61	62	101	102
Gas A	10.4 ±0.2	10.7 ±0.2	10.1 ±0.2	10.0 ±0.2
Gas E	11.5 ±0.2	11.5 ±0.2	11.5 ±0.2	11.7 ±0.2

Burner Convection heat	CO <sub>2</sub> (%) – High speed			
	61	62	101	102
Gas A	10.3 ±0.2	10.4 ±0.2	9.9 ±0.2	10.1 ±0.2
Gas E	11.5 ±0.2	11.8 ±0.2	11.6 ±0.2	11.8 ±0.2

Burner (Generator) Steam heat	CO <sub>2</sub> (%) – Low speed			
	61	62	101	102
Gas A	10.6 ±0.2	10.4 ±0.2	9.5 ±0.2	9.5 ±0.2
Gas E	11.4 ±0.2	11.7 ±0.2	10.9 ±0.2	11.7 ±0.2

Burner (Generator) Steam heat	CO <sub>2</sub> (%) – High speed			
	61	62	101	102
Gas A	10.2 ±0.2	10.3 ±0.2	9.7 ±0.2	9.6 ±0.2
Gas E	11.6 ±0.2	11.4 ±0.2	11.1 ±0.2	11.7 ±0.2

- » "If the percentage of CO<sub>2</sub> measured does not correspond to that requested for the gas used in the table above, adjust the setting screws.
- » Remove the left side panel to access the gas valves (► [Access to components](#) – Left-hand side panel).
- » Adjust the CO<sub>2</sub> adjustment screw on the gas valve to set the CO<sub>2</sub> to « Low speed »:
  - Remove the protective cap from the adjustment screw
  - Adjust the setting by screwing/unscrewing the screw using a 4mm Allen key or Torx T25, **a maximum of one turn at a time** (1% = 1 turn).
  - » Turn clockwise to increase the CO<sub>2</sub> level and anticlockwise to decrease the CO<sub>2</sub> level.
  - After adjustment replace the protective cap.
- » Adjust the RQ adjustment screw on the gas valve to set the CO<sub>2</sub> to « High speed »:
  - Adjust the setting by screwing/unscrewing the screw using a 2.5mm Allen key or Torx T10, **a maximum of a quarter turn at a time**.
  - » Turn clockwise to decrease the CO<sub>2</sub> level and anticlockwise to increase the CO<sub>2</sub> level.

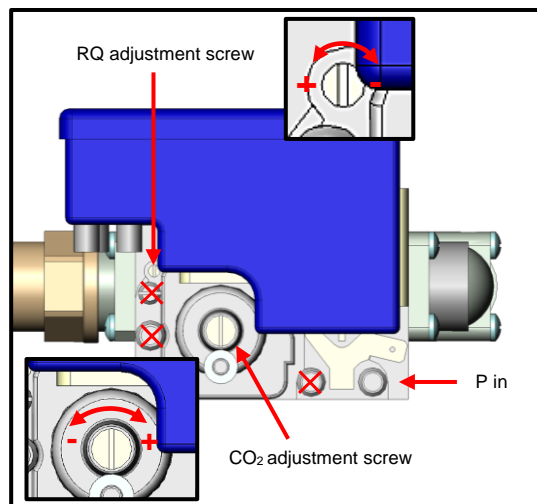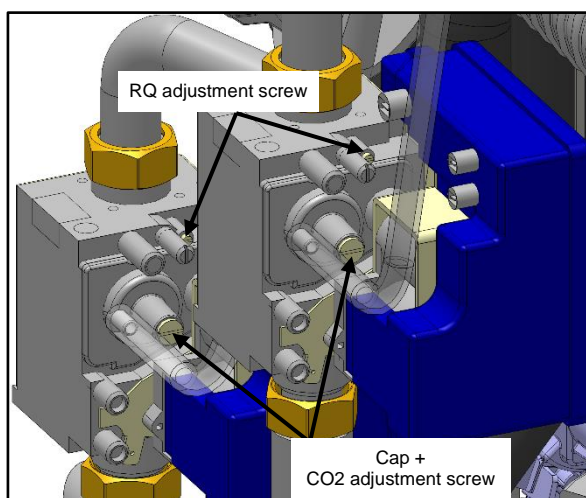

- » Follow "step by step" the actions displayed on the oven screen, validating if the measurement values are correct at each step up to step 9.
- » Place the probe of the gas testing appliance in the steam generator flue gas chimney.
- » Close the oven door.
- » Press the "Continue" button.
- » Follow the information displayed on the oven screen and confirm by pressing the « ✓ » icon if the measurement values are correct. If not, adjust the RQ or/and CO<sub>2</sub> adjustment screw on the corresponding gas valve, then confirm by pressing the « ✓ » icon.
- » When the display shows "Full control / adjustment achieved", press "End" to return to the previous screen.

13. CONTROL OF THE ELECTRODES (GAS BURNER)




**WHO (can carry out this procedure):**  
Expert Technician (Trained on Combis – Trained for this Procedure)

**EQUIPMENT (tool required):**  
- A rod / gauge by 0.24" diameter for the 3 electrodes (detection and flame detection).  
- A rod / gauge by 0.12" (passes) and 0.16" (doesn't pass) diameters for ignition electrodes.

**WHEN (to do this procedure):**  
In case of unusual noise from burners (loud ignition, detonation, etc.),

Procedure:

- » Record the noise,
- » Note the Serial Number (see data plate),
- » Remove the burner and control the position of ignition and flame detection electrodes (see drawing below):
  - A wrong electrodes' adjustment is the main reason to have abnormal noise.
  - No need to check the combustion (except after changing some gas circuit components) or, worse, change the combustion settings (screw ...).
- » Before changing anything in the Electrodes positions/ adjustments, take picture and measure the related positions (2 dimensions in the drawing bellow), and note any potential visible issue (deposits? ...).
- » Proceed to the setting / adjustment of the electrodes if out of the tolerances (see drawing). Change the electrodes if needed.

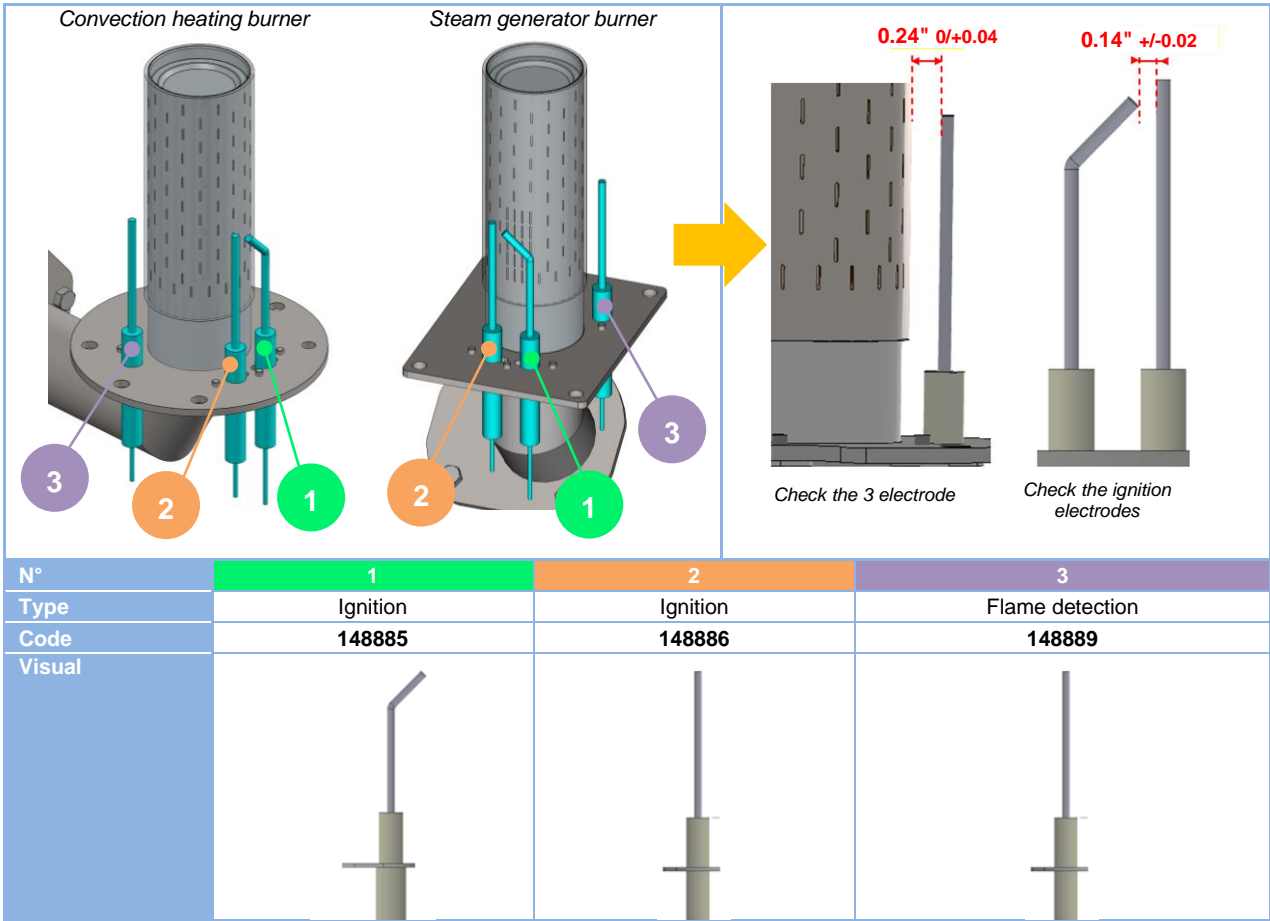

- » Reassemble the burner / gas circuit and validate that the noise problem is resolved.
- » Send all information to TECHNICAL SUPPORT: Serial Number, Gas & pressure, Noise record, setting before any change, settings after change if needed ... and global validation.

## 14. CHANGING THE EQUIPMENT FROM ONE GAS TO ANOTHER



The change of gas type can only be carried out by a technician authorised and trained by manufacturer, or by our local representative.

Before any intervention, check with the owner which gas is currently in use in the kitchen.

Ensure that you are equipped with suitable measuring instruments (product analysis, gas water column pressure gauge, gas leak detector etc.) and that they are in full working order. Without these instruments it is prohibited to carry out any gas-related maintenance or adjustment!

**Note :** Connection/disconnection of the gas supply, as well as any maintenance or interventions are subject to the local legislation in force.

In the following chapters, the different gases are designated by their international codification:

<b>Gas A</b>	NATURAL GAS
<b>Gas E</b>	PROPANE

### 14.1 GAS FLOW RATES AND POWERS

	Gas power		Gas flow rates	
	Gas A <i>Btu/h</i>	Gas E <i>Btu/h</i>	Gas A 6.5 - 10 inch w.c. <i>ft<sup>3</sup>/h</i>	Gas E 10 - 15 inch w.c. <i>lb/h</i>
VICS61G / CHEF-61G	58006	54594	53.89	2.59
VICS62G / CHEF-62G	112601	102364	104.61	4.86
VICS101G / CHEF-101G	93834	88716	87.17	4.21
VICS102G / CHEF-102G	143310	136144	133.14	6.46

### 14.2 CHART OF GAS INJECTORS

	GAS			INJECTORS		
	Designation		Pressure (mbar) / (inch w.c.)	Qty	Ø (1/100")	Code
	Family	Type				
Burners Convection heat and Steam heat	Natural gas	Gas A	16 - 25 / 6.5 - 10	-	-	-
	Propane	Gas E	25 - 38 / 10 - 15	1	580	148 799

### 14.3 CHANGEOVER FROM ONE GAS TO ANOTHER:



**Warning: Risk of poisoning!**

When in use, connecting the wrong type of gas and/or setting the burners incorrectly can lead to a serious risk of intoxication.

Connect the appliance only to the type of gas used.

Check that the appliance settings correspond to the type and pressure of the gas in the installation.

Carry out a flue gas analysis when the appliance is commissioned for the first time.

We recommend installing a CO detector at the installation site.



The oven is equipped with 2 gas burners: one for convection heating and one for the steam generator. It is essential to analyse the combustion gases at the outlet of the two chimneys.



**Caution: Gas leaks = danger for the user!**

Check for leaks: This is a standard procedure and is your responsibility.

#### Notice

- The gas connection must be carried out by a qualified and certified gas fitter.
- Check that the appliance settings correspond to the type and pressure of the gas supplied to the installation (► [Rating plate](#)).
- The gas connection pipe must be sized according to the nominal heat output and type of gas indicated on the nameplate. The cross-section of the gas pipe must be at least 3/4".
- Connect the appliance to the gas supply pipe using a shut-off valve to isolate the appliance from the rest of the installation.
- Flue gas extraction must comply with local regulations.
- Flue gas analysis must be carried out before commissioning and only by a technician approved by the manufacturer.
- Check the gas supply for leaks using a suitable gas detector.
- All connecting parts on the installation site must be certified for gas use (e.g. NF gas; DVGW).
- A gas appliance with a mobile base must be installed using:

*In EU:* "Flexible gas approved in accordance with the regulations in force. (eg : NF TUBOGAZ length 0.75 m, Ø 15/21 (1/2"))" without flexible coupling, to be examined periodically and replaced if necessary.

*In US:* a connector that complies with the current standard (ANSI Z21.69 - CSA 6.16 US) (standard relating to connectors for mobile gas appliances) and a quick disconnection device that complies with the current standard (ANSI Z21.41 - CSA 6.9 US) (standard relating to quick disconnection devices for use with gaseous fuel)

#### **Table of actions when switching from one gas to another:**

According to the country of installation and the category of the appliance (indicated on the firm plate), the adaptation from one gas to another may require 2 operations:

- IN:** Addition or removal of injector  
(Convection heat and steam burners (steam generator))
- RV:** Gas valve adjustment (CO<sub>2</sub> rate)

Research into the operations required to change gas:

- » On the appliance firm plate, check:
  - The category (ies) of the equipment.
  - The gas and pressure for which it is adjusted.
- » In the following chart, select
  - The country concerned.
  - The gas and the category of the appliance (previously identified)
  - The gas and the pressure for which the appliance is going to be adjusted
  - Identify the operations required when changing gas.

Countries concerned	Category and GAS OF ORIGIN (or new gas)	NEW GAS and Category (or gas of origin)	Required operations
	Gas	Gas	
<b>US - Canada</b>	Gas A	Gas E	IN + RV

#### **Procedure:**

Prepare your connection and check the points below:

- ✓ A shut-off valve is fitted to isolate the appliance from the rest of the installation.
- ✓ The appliance is installed in the space provided.
- ✓ The appliance is securely positioned to avoid any risk of slipping.
- ✓ The appliance settings correspond to the type and pressure of the gas supplied to the installation (► [Rating plate](#)).
- ✓ You will have the tools and measuring instruments you need for the connection (monitoring of carbon dioxide CO<sub>2</sub> and carbon monoxide CO), water column manometer, gas leak detector, etc...
- » Connect the appliance tightly to the gas supply system (follow the standards in force) (► [Installation manual](#)).
- » Remove the left-hand side panel of the oven (► [Access to components](#)).
- » Check in the table above whether it is necessary to add or remove the gas injector depending on the new gas.
- » Depending on the new gas, remove or insert the injector if necessary (► [Chart of gas injectors](#)) at the **inlet of the convection heating burner venturi and the steam burner venturi** (steam generator) (► [Gas diagram](#))
- » Check for leaks (► [Installation manual](#)):
  - Use leak detectors or spray to check the gas pipes and make sure there are no leaks.
  - Check the pressure on the gas valve on the supply side:
    - Unscrew the pressure screw by 2 to 3 turns and open the gas valve.
    - Connect the water column hose to the pressure tap and close the gas valve.
    - Monitor the water column level for 1 minute. An unchanged reading at -1 mbar is expected.
  - Check the static pressure (appliance not in operation):
    - Check the pressure using a water column.
    - The reading must be the same as or higher than the pressure specified on the nameplate.
- » Check the connection pressure/dynamic pressure (► [Installation manual](#)):
  - Connect a water column pressure gauge to the pressure tap when the burner is in operation (all gas appliances in operation, burners on).
  - The gas pressure measured in this way must be within the pressure range indicated on the nameplate for the gas used (► [Nameplate](#)).
- » Set the measuring instrument to "CO<sub>2</sub>" for a calculation result of "CO<sub>2</sub> rate in %".
- » From the "Home" menu screen, select the "Settings" button.
- » The screen displays the "Parameters" menu with the "User" tab selected.
- » Select the "Service" tab.
- » The PIN code identification pop-up appears.
- » Enter the "INST" PIN code to access the "Service" parameters (► [Codes PIN](#)).
- » Confirm by pressing the "✓" icon. If the code is correct, access to the screen is authorised; if not, return to entering the PIN code.
- » The screen displays the "Parameters" menu with the "Service" tab displayed.
- » Press the "CO<sub>2</sub> control & adjustment" button.
- » Confirm by pressing the "✓" icon.
- » The "CO<sub>2</sub> control" screen appears.
- » Set up the oven with the new gas.
  - Press the gas type field.
    - » The pop-up with the list of gases appears.
  - Select the desired gas type (Gas A = GA, Gas E = GE)
    - » The gas type is changed in the field.
- » Start the test by pressing the "Start" button (► [Combustion gas analysis procedure](#)).
- » When the display shows "Full control / adjustment achieved", press "End" to return to the previous screen.
- » On the new gas plate, fill in the gas corresponding to the gas for which the appliance has been set.



Convection		Steam	
Max :			Btu/h
Min :			Btu/h
Gas			
Type	Gas Natural	Propane	
P (in.WC)			

- » Stick the new gas plate in place.

#### 14.4 CHANGING/ADJUSTING GAS VALVE

When replacing a gas valve, it is imperative to carry out a leak check and adjust the gas valve by performing a flue gas analysis.



Checking for leaks (► [Installation manual](#))

- » Use leak detectors or spray to check the gas pipes and make sure there are no leaks.
- » Check the pressure on the gas valve on the supply side:
  - Unscrew the pressure screw by 2 to 3 turns and open the gas valve.
  - Connect the water column hose to the pressure tap and close the gas valve.
  - Monitor the water column level for 1 minute. An unchanged reading at -1 mbar is expected.
- » Check the static pressure (appliance not in operation):
  - Check the pressure using a water column.
  - The reading must be the same as or higher than the pressure specified on the nameplate.
- » Check the connection pressure/dynamic pressure:
  - Connect a water column pressure gauge to the pressure tap when the burner is in operation (all gas appliances in operation, burners on).
  - The gas pressure measured in this way must be within the pressure range indicated on the nameplate for the gas used (► [Nameplate](#)).

#### Valve adjustment

MANDATORY carry out a burnt gas analysis and adjust the RQ and CO<sub>2</sub> screws of the gas valve if necessary, for a CO<150ppm (► [Combustion gas analysis procedure](#)).

The evacuation of combustion gases must comply with local legislation.

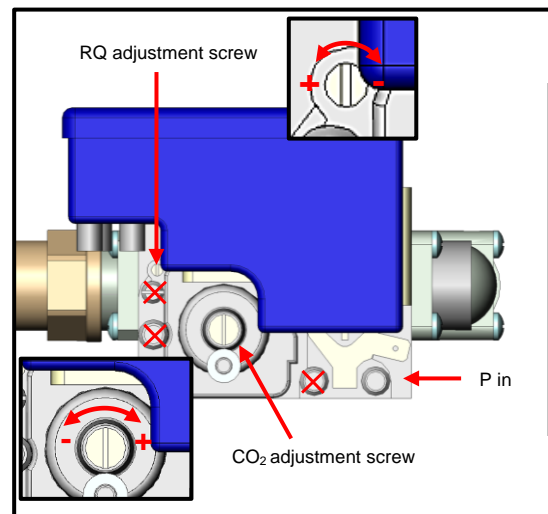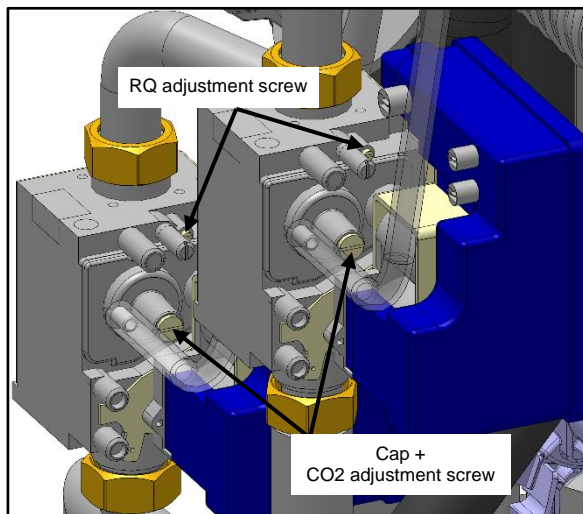

## 15. CONVERSION TABLE

### 15.1 PT100 PROBE

#### PT100 probe components

Temperature probe comprises a resistance probe with the value of 100 ohms for a temperature of 0° and 138.5 ohms for a temperature of 100°C. The variation of the resistance to temperature relationship is linear. The resistance reading is directly proportional to the measured temperature. The probe is not polarised. The probe can be extended using copper wire.


Temperature in °F relative to Resistance in Ω for PT100 probe										
°F	0	1	2	3	4	5	6	7	8	9
30			100.00	100.22	100.43	100.65	100.87	101.09	101.30	101.52
40	101.74	101.95	102.17	102.39	102.60	102.82	103.04	103.25	103.47	103.69
50	103.90	104.12	104.34	104.55	104.77	104.98	105.20	105.42	105.63	105.85
60	106.07	106.28	106.50	106.71	106.93	107.15	107.36	107.58	107.79	108.01
70	108.23	108.44	108.66	108.87	109.09	109.30	109.52	109.73	109.95	110.17
80	110.38	110.60	110.81	111.03	111.24	111.46	111.67	111.89	112.10	112.32
90	112.53	112.75	112.96	113.18	113.39	113.61	113.82	114.04	114.25	114.47
100	114.68	114.90	115.11	115.33	115.54	115.76	115.97	116.18	116.40	116.61
110	116.83	117.04	117.26	117.47	117.68	117.90	118.11	118.33	118.54	118.76
120	118.97	119.18	119.40	119.61	119.82	120.04	120.25	120.47	120.68	120.89
130	121.11	121.32	121.53	121.75	121.96	122.18	122.39	122.60	122.82	123.03
140	123.24	123.46	123.67	123.88	124.09	124.31	124.52	124.73	124.95	125.16
150	125.37	125.59	125.80	126.01	126.22	126.44	126.65	126.86	127.08	127.29
160	127.50	127.71	127.93	128.14	128.35	128.56	128.78	128.99	129.20	129.41
170	129.62	129.84	130.05	130.26	130.47	130.68	130.90	131.11	131.32	131.53
180	131.74	131.96	132.17	132.38	132.59	132.80	133.01	133.23	133.44	133.65
190	133.86	134.07	134.28	134.50	134.71	134.92	135.13	135.34	135.55	135.76
200	135.97	136.19	136.40	136.61	136.82	137.03	137.24	137.45	137.66	137.87
210	138.08	138.29	138.51	138.72	138.93	139.14	139.35	139.56	139.77	139.98
220	140.19	140.40	140.61	140.82	141.03	141.24	141.45	141.66	141.87	142.08
230	142.29	142.50	142.71	142.92	143.13	143.34	143.55	143.76	143.97	144.18
240	144.39	144.60	144.81	145.02	145.23	145.44	145.65	145.86	146.07	146.28
250	146.49	146.70	146.91	147.11	147.32	147.53	147.74	147.95	148.16	148.37
260	148.58	148.79	149.00	149.21	149.41	149.62	149.83	150.04	150.25	150.46
270	150.67	150.88	151.08	151.29	151.50	151.71	151.92	152.13	152.33	152.54
280	152.75	152.96	153.17	153.38	153.58	153.79	154.00	154.21	154.42	154.62
290	154.83	155.04	155.25	155.46	155.66	155.87	156.08	156.29	156.49	156.70
300	156.91	157.12	157.33	157.53	157.74	157.95	158.15	158.36	158.57	158.78
310	158.98	159.19	159.40	159.61	159.81	160.02	160.23	160.43	160.64	160.85
320	161.05	161.26	161.47	161.67	161.88	162.09	162.29	162.50	162.71	162.91
330	163.12	163.33	163.53	163.74	163.95	164.15	164.36	164.57	164.77	164.98
340	165.18	165.39	165.60	165.80	166.01	166.21	166.42	166.63	166.83	167.04
350	167.24	167.45	167.66	167.86	168.07	168.27	168.48	168.68	168.89	169.09
360	169.30	169.51	169.71	169.92	170.12	170.33	170.53	170.74	170.94	171.15
370	171.35	171.56	171.76	171.97	172.17	172.38	172.58	172.79	172.99	173.20
380	173.40	173.61	173.81	174.02	174.22	174.43	174.63	174.83	175.04	175.24
390	175.45	175.65	175.86	176.06	176.26	176.47	176.67	176.88	177.08	177.29
400	177.49	177.69	177.90	178.10	178.30	178.51	178.71	178.92	179.12	179.32
410	179.53	179.73	179.93	180.14	180.34	180.55	180.75	180.95	181.16	181.36
420	181.56	181.77	181.97	182.17	182.38	182.58	182.78	182.98	183.19	183.39
430	183.59	183.80	184.00	184.20	184.40	184.61	184.81	185.01	185.22	185.42
440	185.62	185.82	186.03	186.23	186.43	186.63	186.84	187.04	187.24	187.44
450	187.65	187.85	188.05	188.25	188.45	188.66	188.86	189.06	189.26	189.46
460	189.67	189.87	190.07	190.27	190.47	190.67	190.88	191.08	191.28	191.48
470	191.68	191.88	192.09	192.29	192.49	192.69	192.89	193.09	193.29	193.49
480	193.70	193.90	194.10	194.30	194.50	194.70	194.90	195.10	195.30	195.50
490	195.71	195.91	196.11	196.31	196.51	196.71	196.91	197.11	197.31	197.51
500	197.71	197.91	198.11	198.31	198.51	198.71	198.91	199.11	199.31	199.51
510	199.71	199.91	200.11	200.31	200.51	200.71	200.91	201.11	201.31	201.51
520	201.71	201.91	202.11	202.31	202.51	202.71	202.91	203.11	203.31	203.51
530	203.71	203.91	204.11	204.31	204.51	204.71	204.90	205.10	205.30	205.50
540	205.70	205.90	206.10	206.30	206.50	206.70	206.89	207.09	207.29	207.49
550	207.69	207.89	208.09	208.29	208.48	208.68	208.88	209.08	209.28	209.48
560	209.67	209.87	210.07	210.27	210.47	210.67	210.86	211.06	211.26	211.46
570	211.66	211.85	-	-	-	-	-	-	-	-

#### How to read the chart:

To find the resistance corresponding to a temperature of 364°F.

- Find the intersection of the line 360°F and the column 4°F.
- The reading shows 169.92 Ohms.

#### Check



Check probe resistance with an ohmmeter set to 200 ohms (less than 107 ohms for 68°F).

Check the probe insulation between one of the leads and the metal part with the ohmmeter set at 20 mega ohms (a value over 15 mega ohms).

Check the continuity between the feed and the metal part of the probe.



## 15.2 CELSIUS / FAHRENHEIT TEMPERATURE

Value in °C	Value in °F	Specific temperatures
23°C	73°F	Maximum cold water inlet temperature (city or softened)
25°C	77°F	Minimum temperature in Convection mode and Mixed mode
30°C	86°F	Minimum temperature in Steam mode
35°C	95°F	
40°C	104°F	
45°C	113°F	
50°C	122°F	
55°C	131°F	
60°C	140°F	Maximum operating temperature for cleaning products
65°C	149°F	
70°C	158°F	
75°C	167°F	Maximum electronic temperature
80°C	176°F	
85°C	185°F	
90°C	194°F	
95°C	203°F	
100°C	212°F	
10°C	230°F	

Value in °C	Value in °F	Specific temperatures
120°C	248°F	
130°C	266°F	Maximum temperature in steam mode
140°C	284°F	
150°C	302°F	
160°C	320°F	
170°C	338°F	
180°C	356°F	No-Fail mode operating temperature
190°C	374°F	
200°C	392°F	
210°C	410°F	
220°C	428°F	
230°C	446°F	
240°C	464°F	
250°C	482°F	
260°C	500°F	
270°C	518°F	
280°C	536°F	
290°C	554°F	
300°C	572°F	Maximum temperature in Convection mode and Mixed mode
400°C	752°F	Safety temperature

## 15.3 WATER HARDNESS

	°dH	°f	°e	ppm	mmol/l	gr/gal	mval/kg	CaO [mg/l]	CaCO3 [mg/l]	Ca2+ [mg/l]
1 °f (France)	0.56	1	0.70	10,0	0.1	0.584	0.2	5.60	10.0	4.00
1 °e (GB)	0.8	1.43	1	14.25	0.14	0.83	0.284	7.98	14.25	5.71
1 °dH (Germany)	1	1.78	1.25	17.9	0.1783	1.042	0.357	10	17.85	7.15
1 ppm (USA)	0,056	0.1	0.07	1	0.01	0.0584	0.02	0.56	1.0	0.40
1 gr/gal (USA)	0.96	1.71	1.20	17.1	0.171	1	0.342	9.60	17.11	6.85
1 mmol/l	5.60	10.01	7.02	100.1	1	5.84	2	56.07	100.1	40.08
1 mval/kg	2.8	5.0	3.51	50	0.5	2.92	1	28.04	50.0	20.04

## 15.4 PRESSURE

kPa	bar	mbar	psi	Inch / wc
0,1	0.001	1	0,0145	0,4019
0,2	0.002	2	0,0290	0,8037
0,3	0.003	3	0,0435	1,2056
0,4	0.004	4	0,0580	1,6075
0,5	0.005	5	0,0725	2,0093
0,6	0.006	6	0,0870	2,4112
0,7	0.007	7	0,1015	2,8131
0,8	0.008	8	0,1160	3,2149
0,9	0.009	9	0,1305	3,6168
1	0,01	10	0,1450	4,0187
2	0,02	20	0,2901	8,0373
3	0,03	30	0,4351	12,0560
4	0,04	40	0,5802	16,0746
5	0,05	50	0,7252	20,0933
6	0,06	60	0,8702	24,1119
7	0,07	70	1,0153	28,1306
8	0,08	80	1,1603	32,1492
9	0,09	90	1,3053	36,1679
10	0,1	100	1,4504	40,1865
20	0,2	200	2,9008	80,3730
30	0,3	300	4,3511	120,5595

kPa	bar	mbar	psi	Inch / wc
40	0,4	400	5,8015	160,7460
50	0,5	500	7,2519	200,9325
60	0,6	600	8,7023	241,1190
70	0,7	700	10,1527	281,3055
80	0,8	800	11,6030	321,4920
90	0,9	900	13,0534	361,6785
100	1	1000	14,5038	401,8650
150	1,5	1500	21,7557	602,7975
200	2	2000	29,0076	803,7300
250	2,5	2500	36,2595	1004,6625
300	3	3000	43,5114	1205,5950
350	3,5	3500	50,7633	1406,5275
400	4	4000	58,0152	1607,4600
450	4,5	4500	65,2671	1808,3925
500	5	5000	72,5190	2009,3250
550	5,5	5500	79,7709	2210,2575
600	6	6000	87,0228	2411,1900
700	7	7000	101,5266	2813,0550
800	8	8000	116,0304	3214,9200
900	9	9000	130,5342	3616,7850
1000	10	10000	145,0380	4018,6500