




INSTALLATION AND OPERATION INSTRUCTIONS

TOBIN ELLIS SIGNATURE SERIES LIMITED EDITION MOBILE BAR

MODEL
MOBS-66LE

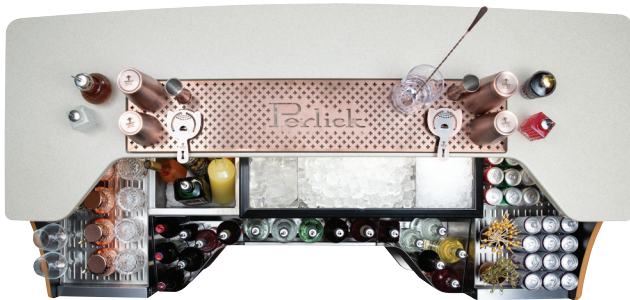

Closeup of leather detail



GENERAL INFORMATION

Introduction

Congratulations on your purchase of a Perlick Mobile Bar product. This manual has been prepared to assist you in the setup of your mobile bar and to acquaint you with its operation and maintenance.

We dedicate considerable time to ensure that our products provide the highest level of customer satisfaction. If service is required, your dealer can provide you with a list of qualified service agents. For your own protection, never return merchandise for credit without our approval.

We thank you for selecting a Perlick product and assure you of our continuing interest in your satisfaction.

Warranty

To register your product, visit our web site at www.perlick.com. Click on "Commercial", then "Service". Click on the link "Warranty Registration Form". You must complete and submit this form or the installation date will revert back to the ship date.

Please record the purchase date and the dealer's name, address and telephone number below.

Model Number: _____

Order Number: _____

Purchase Date: _____

Dealer Name & Address _____

Phone Number _____

Form No. Z2769
Rev. 05.13.25

TABLE OF CONTENTS

General Information	1
Safety	2
Cabinet Specifications	3
Preparing the Cabinet for Use	
Uncrating and Inspection	4
Electrical	5
Maintenance	6
Stainless Steel Care & Cleaning	6
Laminate or Engineered Solid Surface Cleaning Instructions	6
Recycled Leather Maintenance Recommendations	7
Routine Care	7
Cleaning Recommendations	8
Cabinet Drawings	9
Replacement Parts	10

SAFETY

PLEASE READ all instructions completely before attempting to install or operate the unit. Take particular note of the DANGER, WARNING and CAUTION information in the manual. The information is important for the safe and efficient installation, operation and care of your Perlick unit.

DANGER Indicates a hazard that **WILL** result in serious injury or death if precautions are not followed.

WARNING Indicates a hazard **MAY** cause serious injury or death if precautions are not followed.

CAUTION Indicates a hazard where minor or moderate injury may occur if precautions are not followed.


NOTICE Indicates that property damage may occur if warnings or instructions are not followed.

IMPORTANT!

Read and understand all information in this manual before attempting the installation.
All plumbing and electrical work must be performed by a qualified technician and conform to all applicable state and local codes.

TOBIN ELLIS SIGNATURE SERIES LIMITED EDITION MOBILE BAR

Operation/Installation Manual

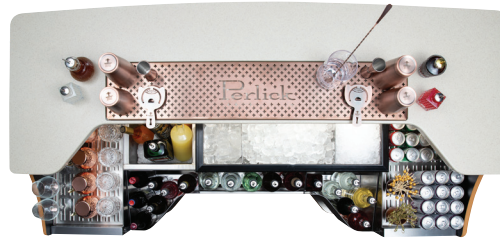

MOBS-66LE-TC-VS-001



MODEL NOS.	MOBS-66LE	
DIMENSIONS: EXTERIOR (mm)	Length	70" (1778)
	Width	34-1/2" (877)
	Height	43-3/4" (1112)
	Weight (lbs)	351 lbs. (159 kg)
DIMENSIONS: SHIPPING (mm)	Length	75" (1905)
	Width	40" (1016)
	Height	70" (1778)
	Weight (lbs)	451 lbs. (205 kg)
PERLICK BAR EQUIPMENT	Ice Chest	TS30IC with sliding Cover
	Insulated Bottle Well	TSC12IBW
	Drainboard	TSCS12 (2 ea.)
	Speed Rail	SRC-CL left curved (1 ea.) SRC-CR right curved (1 ea.) SRC-S18 18" straight (1 ea.)
ELECTRICAL	Voltage	120V AC
	Frequency	60 Hz
	Phase	Single
	Amperage	0.4 A
	Connection	NEMA 5-15P
	Cord Length	12ft
LED BARTENDER TASK LIGHTING	Color Temperature	4000K
	Lumen Output	High - 1200 LM Medium - 800 LM Low - 400 LM
GRAY WATER/ICE MELT TANK (PRE-PLUMBED)	Capacity	5 gal (18.9 L)

*Note: Custom Vinyl wrap graphics available on Perlick Mobile Bar and Tobin Ellis Signature Series Mobile Bar
(Must call Perlick for quote and ordering process)

Preparing the Mobile Bar for Use

UNCRATING AND INSPECTION

Remove all crating material before operating. Carefully inspect cabinet for hidden damage. If damage is discovered, file your claim immediately with the transport company. Perlick is not responsible for damage in transit.

⚠ DANGER Do not use or store flammable liquids (ie; gasoline) or vapors near the appliance to avoid fire.

⚠ WARNING Ensure mobile bar is secured to forklift with straps before lifting to prevent tipping which could cause serious injury or death.

⚠ WARNING Always place mobile bar on level surface and lock casters after moving to desired location to prevent rolling. (Engineering is working on max incline info).

⚠ WARNING Never move or place mobile bar on a steep incline to prevent tipping.

⚠ WARNING **TIP OVER HAZARD:** This product can tip over while transporting. If this hazardous situation is not avoided, DEATH or SERIOUS INJURY could occur. To safely transport this product, two people must be used to maintain control while moving. DO NOT exceed incline angles of 15° in any direction. DO NOT exceed walking speed, about 3 mph (5 km/h).

⚠ WARNING **CRUSH HAZARD:** This product is heavy and could pose a crush hazard if a loss of control occurs while transporting. If this hazardous situation is not avoided, DEATH or SERIOUS INJURY could occur. To safely transport this product, two people must be used to maintain control while moving. APPLY parking brakes with the product stationary on level ground. DO NOT park the cart on un-level ground. DO NOT exceed incline angles of 15° in any direction. DO NOT exceed walking speed, about 3 mph (5 km/h).

⚠ CAUTION **BIOLOGICAL AND SLIP HAZARD:** This product contains a waste water tank that could backflow or spill waste water, which could pose a biological and slip hazard. If this hazardous situation is not avoided, MINOR or MODERATE INJURY could occur. Empty the waste water tank before it is full to reduce the risk of spills. DO NOT raise the tank above the lowest drain height to avoid backflowing waste water. If a fresh water tank is present, then the waste water tank must be at least 15% larger than the fresh water tank, as supplied by Perlick.

⚠ CAUTION **FALLING OBJECT HAZARD:** This product is moveable and has surfaces for the placement of objects that could pose a falling object hazard. If this hazardous situation is not avoided, MINOR or MODERATE INJURY could occur. Prior to use, ensure that the cart is parked in a level position. APPLY parking brakes with the product stationary on level ground. DO NOT park the cart on un-level ground. DO NOT place objects on the product while transporting.

⚠ CAUTION **PINCH AND CUT HAZARD:** This product may have sharp edges or pinch points that could pose a pinch or cut hazard. If this hazardous situation is not avoided, MINOR or MODERATE INJURY could occur.

⚠ CAUTION **BURN HAZARD:** This product may have a hot water heater that could pose a burn hazard. If this hazardous situation is not avoided, MINOR or MODERATE INJURY could occur. Set water heater temperature at 120°F.

⚠ CAUTION **BIOLOGICAL HAZARD:** This product may contain a fresh water tank that could pose a biological hazard. If this hazardous situation is not avoided, MINOR or MODERATE INJURY could occur. Fresh water tanks require manual cleaning after each use. Consult with your local health code for cleaning and sanitizing requirements.

NOTICE If a fork lift is used to lift the mobile bar, extreme care should be taken to avoid damaging the casters.

NOTICE Ensure hose from ice chest, bottle well, and drainboards are all routed to the grey water tanks supplied with your mobile bar and that they have not become disconnected during shipping.

NOTICE While your mobile bar is designed to be waterproof and can be used outdoors, prolonged exposure to heavy rain, UV light, extreme temperatures, snow, etc. can cause damage. Bar should be stored indoors after each use.

USE AND CARE OF GREY WATER TANKS

- Be sure to empty grey water tanks after each use
- Clean tanks with regular dish soap and sanitize with a mild bleach solution after each use and before placing in storage

ELECTRICAL

⚠ WARNING Inspect the electrical cord and plug for damage prior to energizing the unit to avoid potential electric shock.

⚠ WARNING Use electrical grounding to avoid electrocution or electric shock. This appliance is equipped with a 3-prong (grounding) polarized plug for your protection against possible shock hazards. Failure to use grounding may result in death, serious injury, or property damage.

⚠ WARNING Never use an extension cord to connect the unit to the electrical source. Do not use a two-prong adapter or remove the power cord ground prong. Failure to use grounding may result in death, serious injury, or property damage.

NOTICE Using any voltage other than specified will result in serious damage to the unit.

NOTICE Task lighting is intended for lighting bar equipment only, and should not be relied upon for lighting any surrounding environment.

Maintenance



WARNING Shut off the electricity to the unit before cleaning and other routine maintenance.



CAUTION NEVER use hydrochloric acid (muriatic acid) on stainless steel. Do not use abrasive cleansers or cloths on any interior or exterior surfaces or removeable parts.

STAINLESS STEEL CARE & CLEANING

General

Stainless steel is a “passive” metal because it contains other metals like chromium, nickel and manganese that stabilize the atoms. Chromium provides an invisible passive film that covers the steel surface, acting as a shield against corrosion. As long as the film is intact and not contaminated, the metal is passive and stainless. If the passive film of stainless steel has been broken, equipment can start to corrode and rust.

Three materials or processes can break down stainless steel's passive layer and allow corrosion to occur:

- Mechanical abrasion
- Deposits and water
- Chlorides

Mechanical abrasion refers to items that will scratch a steel surface. Steel pads, wire brushes and scrapers are prime examples.

Water comes out of the faucet in varying degrees of hardness. Hard water may leave spots. When allowed to sit, these deposits will break down the passive chromium layer and rust stainless steel. Other deposits from food preparation must be promptly removed with an appropriate cleaning agent.

Chlorides are found nearly everywhere. They are in water, food and table salt. Household and industrial cleaners are the worst offenders.

Preventing Stainless Steel Rust

Use non-abrasive tools to clean stainless steel products. Soft cloths and plastic scouring pads will not harm the steel's passive layer.

Clean with polish lines. Some stainless steels have visible polishing lines or “grain”. When visible lines are present, always scrub in a motion parallel to the lines. When the grain cannot be seen, polish in a consistent straight pattern and not in a circular motion.

Use alkaline, alkaline chlorinated or non-chloride containing cleaners. While many traditional cleaners are loaded with chlorides, the industry is providing an ever-increasing choice of non-chloride cleaners. If you are not sure of chloride content in the cleaner being used, contact your cleaner supplier. If your present cleaner contains chlorides, ask your supplier for an alternative. Avoid cleaners containing quaternary salt; it also can attack stainless steel and cause pitting and rusting. Keep food equipment clean. Use alkaline, alkaline chlorinated or non-chloride cleaners at recommended strength. Clean frequently to avoid build-up of hard, stubborn stains. The single most likely cause of damage is chlorides in the water. Remember, adding heat to cleaners that contain chlorides dramatically increases their effect on stainless steel.

If chlorinated cleaners are used, immediately rinse and wipe equipment and supplies dry. The sooner you wipe standing water, especially when it contains cleaning agents, the better. After wiping equipment down, allow it to air dry. Oxygen helps maintain the stainless steel passive film.

To clean interior and exterior non-metallic surfaces and removable parts, wash with mild solution of soap and lukewarm water with a little baking soda. Rinse and dry thoroughly. Avoid getting water on the lights.

LAMINATE OR ENGINEERED SOLID SURFACE CLEANING INSTRUCTIONS

General

Everyday cleaning of laminate exterior and bar tops, as well as Engineered Solid Surface bar tops, is as simple as a quick wipe with a damp sponge. All resist muddy fingerprints, coffee spills and so much more. Be sure to read and follow the recommended care and cleaning procedures.

⚠ WARNING Prolonged exposure of the laminate or engineered solid surface to bleach will cause discoloration. Hot pans and heat-producing appliances (such as electric skillets), when set directly upon countertops, can mar the product's beauty. Always use a heat shield, hot pad or trivet.

CARE & MAINTENANCE OF LAMINATE AND ENGINEERED SOLID SURFACE

Recommended Cleaners:

- Windex®
- Glass Plus®
- Fantastik®
- Mr. Clean®
- Formula 409®
- Isopropyl Alcohol (Isopropanol)

⚠ CAUTION Do NOT use cleaners containing the following chemical ingredients on laminate or engineered solid surfaces:

- Hydrochloric Acid
- Sulfuric Acid
- Hydrofluoric Acid
- Phosphoric Acid
- Sodium Hydroxide
- Pumice (abrasive)

RECYCLED LEATHER MAINTENANCE RECOMMENDATIONS

General

We recommend the use of a damp, well-wrung out terry cloth as the first and easiest option to maintain our recycled leather line. Should you need to use additional cleaning products, we recommend using a pH-neutral cleaner such as Bona Hardwood Cleaner or Bona for Cabinets which was designed for similar materials.

The leathers will remain intact without nourishing or additional creams for years. Do not use leather creams or cleaners or any harsh chemicals on our recycled leathers.

You can fill cracks or dents in the leather with a leather marker, a wood filler wax crayon or, alternatively, shoe polish of a matching color. Kelly Shoe Polish offers a wide variety of fashionable colors.

ROUTINE CARE

To clean the surface, use a damp cloth or sponge and a mild soap or detergent. Rinse thoroughly with warm water and wipe dry. Difficult stains such as coffee or tea can be removed using a mild household cleaner/detergent and a soft bristled brush, repeating as necessary. If a stain persists, use a paste of baking soda and water and apply with a soft bristled brush. Light scrubbing for 10 to 20 strokes should remove most stains. Although baking soda is a low abrasive, excessive scrubbing or exerting too much force could damage the decorative surface, especially if it has a gloss finish. Stubborn stains that resist any of the above cleaning methods may require the use of undiluted household bleach or nail polish remover. Apply the bleach or nail polish remover to the stain and let stand no longer than two minutes. Rinse thoroughly with warm water and wipe dry. This step may be repeated if the stain appears to be going away and the color of the laminate has not been affected.

Recommended Cleaners for Specific Situations

Job	Cleaning Agent	Comments
Routine cleaning	Soap, ammonia, detergent	Apply with sponge or soft cloth
Fingerprints and smears	Areal 20, Lac-O-Nu, Lumin Wash, O-Cedar Cream Polish	Provides barrier film to minimize fingerprints. Can be used on all finishes. Rub the surface with a cloth as directed on the package.
Stubborn stains and discolorations	AllChem Concentrated Cleaner, Samae, Twinkle, Cameo Copper Cleaners, Grade FFF Italian Pumice Whiting, Steel Bright, Lumin Cleaner, Zud Restoro, Sta-Clean, Highlite Cooper's Stainless Steel Cleaner or Revere Stainless Steel Cleaner	Apply with a damp sponge or cloth, then rinse with clear water and wipe dry.
	Old Dutch, Lighthouse Sunbrite, Wyandotte Bab-O, Gold Dust, Sapollo, Bon Ami or Comet	For these household cleaners, rub with a damp cloth. They may contain chlorine bleaches so rinse thoroughly after use and wipe dry.
	Liquid NuSteel or Dubois Temp	For these products, rub the surface with a dry cloth using only a small amount of cleanser. Rinse with water and dry.
Heat tint or heavy discoloration	Penny-Brite, Copper Brite, Paste Nu-Steel, Dubois Temp or Tarnite	Rub onto surface with a dry cloth
	Bar Keepers Friend, Revere Stainless Steel Cleaner, Allen Polish, Steel Bright Wyandotte Bab-O or Zud	When using these cleaners, apply with a damp sponge or cloth, rinse thoroughly and wipe dry.
Tenacious deposits, rust, discoloration, industrial atmospheric stains	Oakite No. 33 Dilac, Texo NY, Flash-Klenz Caddy Cleaner, Turco Scale 4368 or Permag 57	Swab and soak with a clean cloth. Let stand for 15 minutes or more according to directions on package, then rinse and wipe dry.
Rust discoloration or corrosion caused by cleaning agents containing hydrochloric (muriatic) acid or chlorine bleach	3M Scotch Pad, type A, grade "fine"	Clean off the surface soil using cleaning methods above. Then rub discolored or corroded areas lightly with a dry pad.
	pH-neutral cleaner such as Bona Hardwood Cleaner or Bona for Cabinets	Use a damp, well-wrung out terry cloth
<i>Use of property names is intended only to indicate a type of cleaner and does not constitute an endorsement. Omission of any proprietary cleaner does not imply its inadequacy. All products should be used in strict accordance with instructions on the package.</i> NOTE: Do NOT use steel wool or scouring pads to clean stainless steel.		

To Obtain Product Information

- Contact your selling dealer.
- Inquire on the web at www.perlick.com.
- Call 800-558-5529 for factory assistance for information, planning, installation or product information.
- Write **Perlick Corporation, Customer Service Department**, 8300 W. Good Hope Road, Milwaukee, Wisconsin 53223.
- E-mail us at warrantyserv@perlick.com.

To Obtain Product Service, Replacement Parts or Accessories:


Use only genuine Perlick replacement parts and accessories. Genuine Perlick parts and accessories are designed to work

correctly with Perlick products and offer superior service life. The use of non-Perlick parts can damage the unit and may void the warranty.



Check the model and serial number of the unit located on the label attached to the inside top of the cabinet.

Call a Perlick Factory Authorized service center. For the location of the nearest Service Center, contact your dealer, or inquire via the web at www.perlick.com, or write to:

Perlick Corporation, Customer Service Department, 8300 W. Good Hope Road, Milwaukee, Wisconsin 53223, call 800-558-5592, or e-mail us at: warrantyserv@perlick.com.

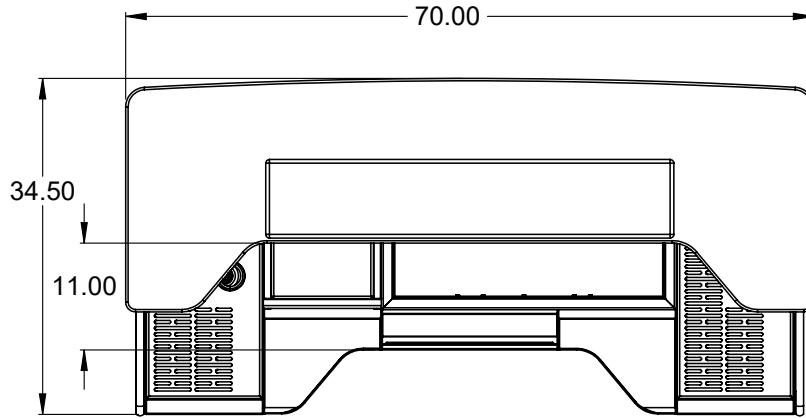

MOBS-66LE-TC-VS-001

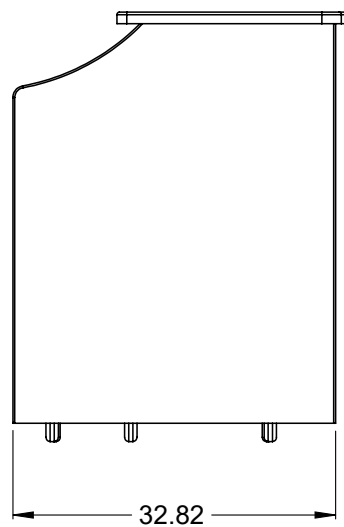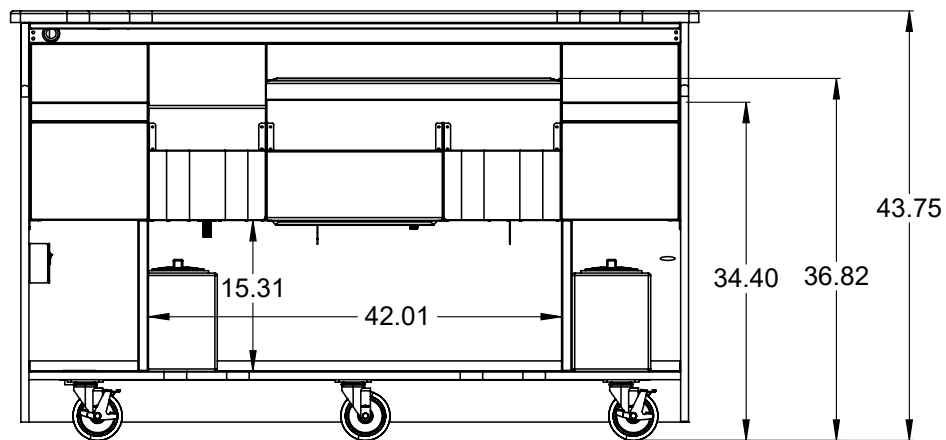

Replacement Parts

Item	Description	Customer Order Number
Caster Option 1	REP Caster 5" SS, Swivel with no brake	1030590
Caster Option 2	REP Caster 5" SS, Swivel with brake	1030591
Grey Water Tank (2.5 Gal)	REP 2.5 Gallon Water Tank	1030594
Grey Water Tank (6 Gal)	REP 6 Gallon Water Tank	1030595
LED Lights	REP LED lights	1054643
Electrical Strip with 15' Power Cord	REP Electrical strip with 15-5P	1054914
Power Supply	REP Power Supply for Light Bar	1054644

NOTES

T H E
PERLICK®
C O R P O R A T I O N

8300 W Good Hope Rd

Milwaukee

Milwaukee, WI 53223

Form No. Z2769
Rev. 05.13.25