
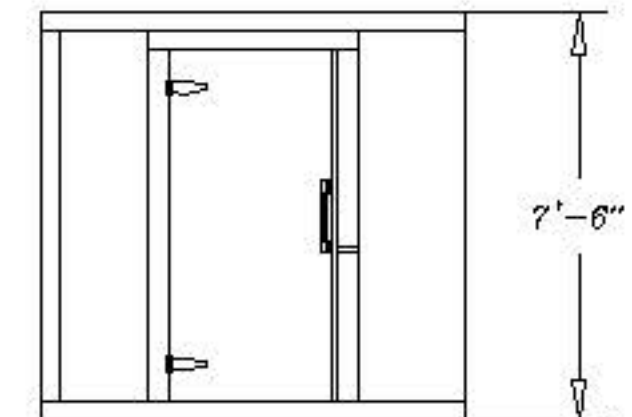


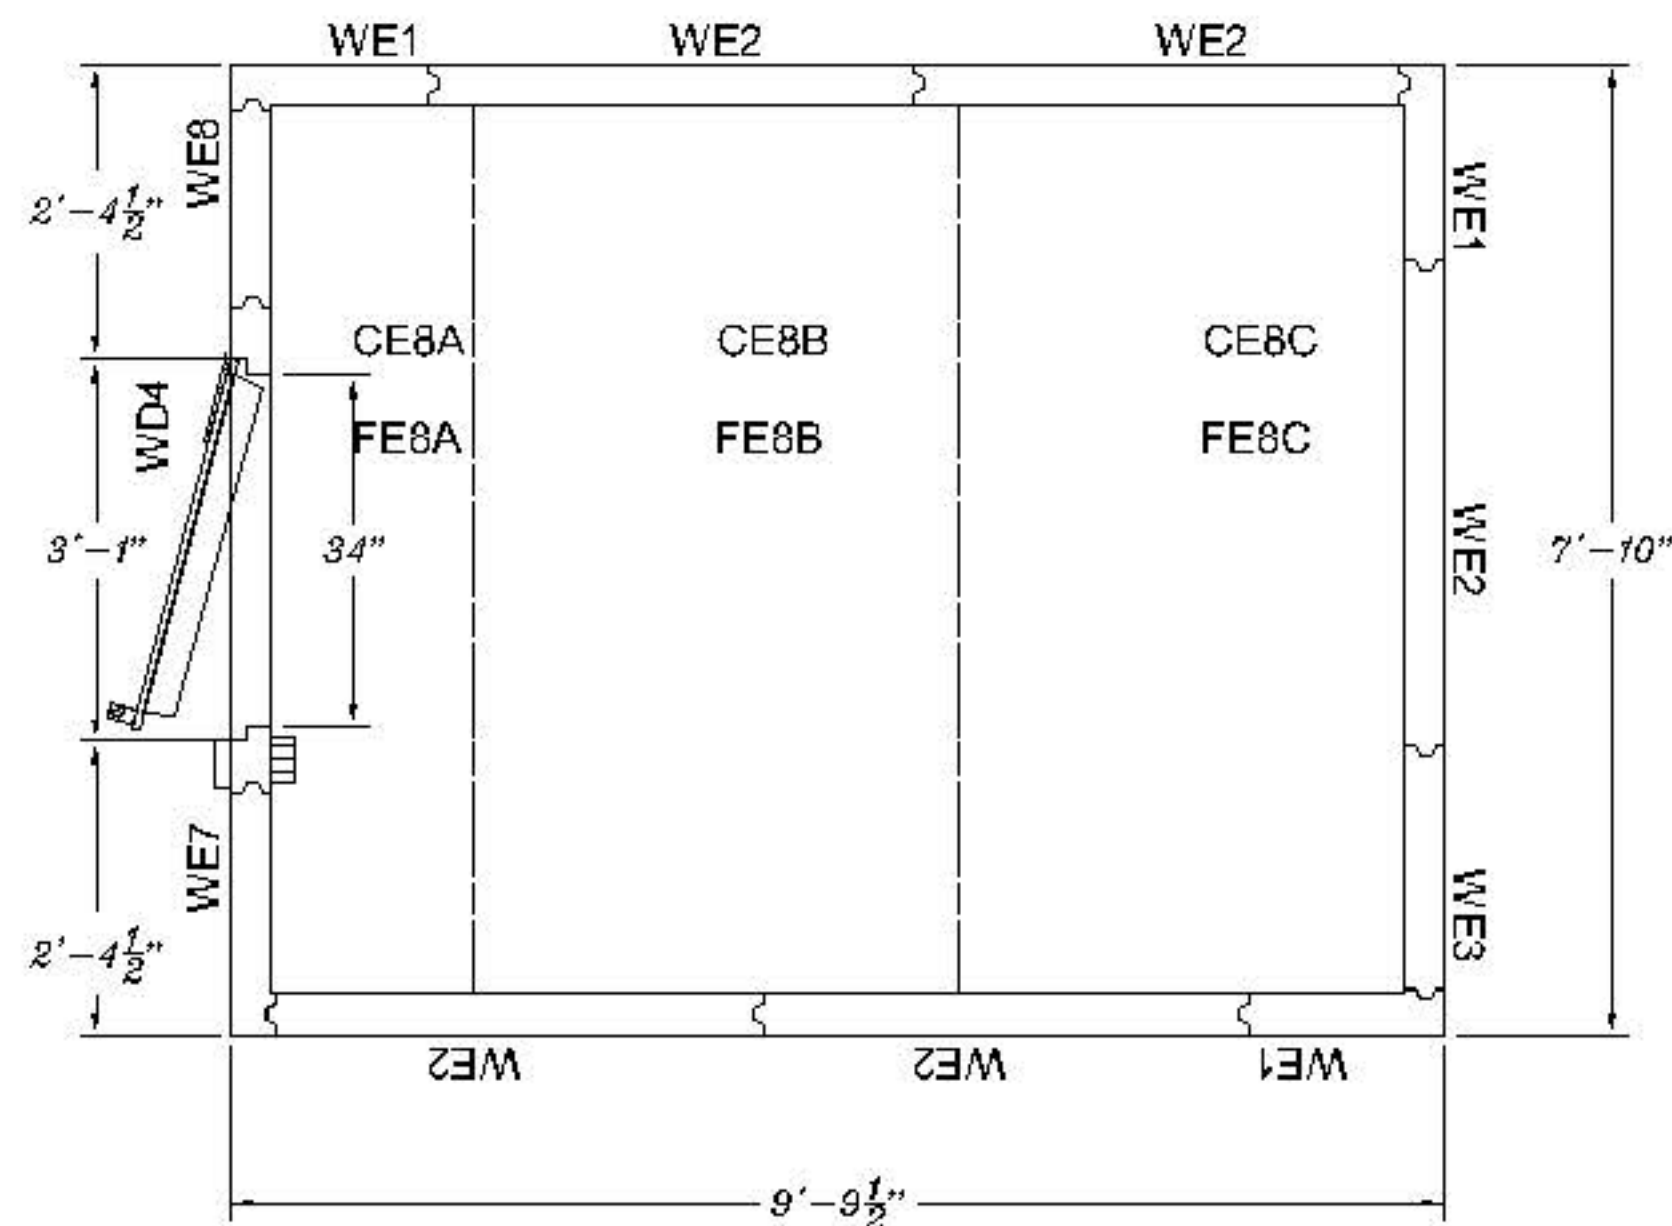

QUOTE DRAWING  
Sign below for acceptance  
X \_\_\_\_\_

Door hinge: Left \_\_\_\_\_ Right \_\_\_\_\_  
Door location wall (centered): Left \_\_\_\_\_ Front \_\_\_\_\_  
By signing here, you agree to our terms and conditions as outlined on  
www.uscooler.com/terms. Panel configuration subject to J & J Cooler final approval. A  
facsimile or emailed approval of this drawing to us or you shall have the same force  
and effect as a signed original and shall, upon receipt by J & J Cooler, be binding on both  
parties.

Materials:  
ExtMetal: Galvalume  
IntMetal: Galvalume  
Foam: Extruded 4in.

Legend  
Ceiling \_\_\_\_\_  
Floor \_\_\_\_\_

Cooler: 9'-9 1/2" x 7'-10" x 7'-6"  
Scale: 3/8"= 1'



**FASTCOOLER**

by U.S. Cooler  
401 DELAWARE ST. \* QUINCY, IL 62301  
TEL: 217 223 2421 \* 800 521 2685 \* FAX 217 223 2424

|                          |                      |
|--------------------------|----------------------|
| CUSTOMER _____           |                      |
| JOB# _____               | P.O.# Job Ref. _____ |
| DATE: 06/06/2023         | DRAWN: C.G. 2.0      |
| DWG. REV: C1810FL.PA95.L | APV: _____           |

To aid in packing, please indicate with an X the corner where installation will be starting.

| Refrigeration Specifications                                           |              |              |      |                     |     |        |        |                       |
|------------------------------------------------------------------------|--------------|--------------|------|---------------------|-----|--------|--------|-----------------------|
| Qty                                                                    | Manufacturer | Model        | HP   | Electrical          | MCA | GmpRLA | GmpLRA | Dimensions DxWxH      |
| Pre-assembled Remote Med Temp R448A Air Cooled Outdoor Condensing Unit |              |              |      |                     |     |        |        |                       |
| 1                                                                      | Russell      | RF11055E4SDA | 0.55 | 208-230/1Phase&201k | 15  | 5.1    | 26.5   | 28.25"x27.875"x18.17" |
| 1                                                                      | Russell      | RL6A052ADARE |      | 115/1Phase&201k     | 0.8 |        |        | 15.5"x27.125"x18.125" |