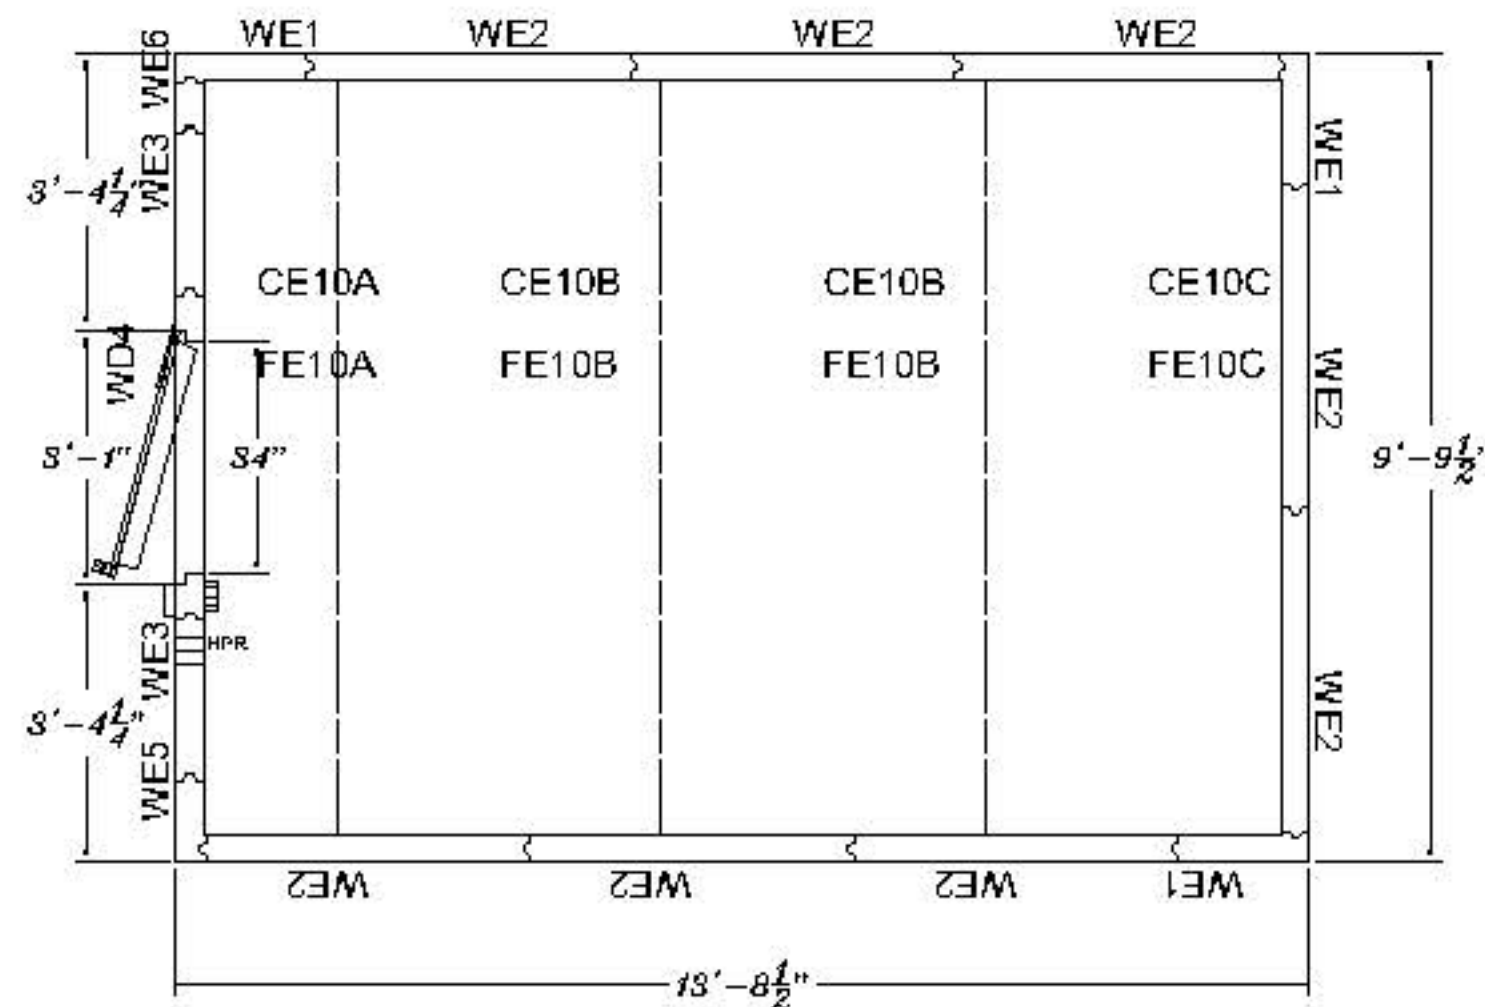


QUOTE DRAWING  
Sign below for acceptance  
X\_\_\_\_\_

Door hinge: Left\_\_\_Right\_\_\_

Door location wall (centered): Left\_\_\_Front\_\_\_

By signing here, you agree to our terms and conditions as outlined on  
www.uscooler.com/terms. Panel configuration subject to J & J Cooler final approval. A  
handwritten or emailed approval on this drawing - 10/14 - J. Russell - shall have the same force  
and effect as a signed original and shall, upon receipt by J & J Cooler, be binding on both  
parties.

Materials:  
ExtMetal:Galvalume  
IntMetal:Galvalume  
Foam:Extruded 4in.

Legend  
Ceiling \_\_\_\_\_  
Floor \_\_\_\_\_

Freezer: 13'-8 1/2" x 9'-9 1/2" x 7'-6"

Scale: 1/4"= 1'



**FASTCOOLER**

by U.S. Cooler  
401 DELAWARE ST. \* QUINCY, IL 62301  
TEL: 217 223 2421 \* 800 521 2685 \* FAX 217 223 2424

CUSTOMER

JOB#

P.O.# Job Ref.

DATE

06/06/2023

DRAWN

C.G. 2.0

DWG. REV

F1014FL.PA95.L

APV.

To aid in packing, please indicate with  
an X the corner where installation will  
be starting.

| Refrigeration Specifications                                           |              |              |    |                     |      |        |        |                       |
|------------------------------------------------------------------------|--------------|--------------|----|---------------------|------|--------|--------|-----------------------|
| Qty                                                                    | Manufacturer | Model        | HP | Electrical          | MCA  | GmpRLA | GmpLRA | Dimensions DxWxH      |
| Pre-assembled Remote Low Temp R448A Air Cooled Outdoor Condensing Unit |              |              |    |                     |      |        |        |                       |
| 1                                                                      | Russell      | RFD300L4SDA  | 3  | 208-230/1Phase/60Hz | 32   | 16     | 88     | 28.25"x39.875"x21.25" |
| 1                                                                      | Russell      | RL6E077DDARE |    | 208-230/1Phase/60Hz | 10.8 |        |        | 15.5"x43.625"x18.125" |