

COMBITHERM®


OPERATOR'S MANUAL

CT PROFORMANCE™

CTP6-10E	CTP6-10G
CTP10-10E	CTP10-10G
CTP7-20E	CTP7-20G
CTP10-20E	CTP10-20G
CTP20-10E	CTP20-10G
CTP20-20E	CTP20-20G



WARNING



Do not store or use gasoline or other flammable vapors or liquids in the vicinity of this or any other appliance.

△ WARNING

Improper installation, alteration, adjustment, service, cleaning, or maintenance could result in property damage, severe injury, or death.

Read and understand the installation, operating and maintenance instructions thoroughly before installing, servicing, or operating this equipment.







This manual covers the following CTP series models:

Boiler-Free Models	Steam Generator Models	
6-10E, 6-10G	6-10EB	
10-10E, 10-10G	10-10EB	
7-20E, 7-20G	7-20EB	
10-20E, 10-20G	10-20EB	
20-10E, 20-10G	20-10EB	
20-20E, 20-20G	20-20EB	

Please post the following instructions in a prominent location in the event the user smells gas.

DANGER



Before starting the appliance, make certain you do not detect the odor of gas.

If you smell gas:

- Shut off the gas supply immediately.
- Do not attempt to light any appliance.
- Do not touch any electrical elements.
- Extinguish any open flame.
- · Evacuate the area.
- Use a telephone outside the property and immediately contact your gas supplier.
- If unable to contact your as supplier, contact the fire department.



Enjoy your Alto-Shaam Combi Oven!

The combi oven combines a steam and convection oven into one versatile unit and can serve a variety of cooking functions. Alto-Shaam's combi ovens allow chefs to control humidity and temperature separately, with powerful results. The same oven can be used to dehydrate vegetables, roast pork, steam rice, smoke brisket and bake loaves of bread.

The PROtouch™ recipe management system with one-touch cooking provides complete control over the oven, allowing chefs and foodservice employees to select pre-programmed recipes for

maximum consistency. To store and secure important information, a HACCP data system pairs up with an onboard USB port, so settings can be downloaded and saved for the future.

When it's time to clean up, Alto-Shaam's CombiClean Plus™ automated cleaning system saves labor previously spent scrubbing the oven cavity. On the oven's exterior, a PROrinse™ retractable hose gives you spray-washing power without opening the oven door.

Before Use

If this is the first time this oven is being used, or if the oven has just been removed from storage, follow these steps for cleaning:

- 1. Remove all packing material from the oven,
- Remove and wash any detachable items such as wire shelves, side racks, pans, and drip trays with hot, soapy water. Dry with a clean, damp lint-free cloth.
- 3. Remove all visible grease or oil from the oven.
- 4. Clean the interior and exterior of the oven with a mild soap and water solution. Apply the solution with a clean, damp cloth. Do not use commercial or household cleaners that contain ammonia. Wipe with a clean, damp cloth to remove all detergent residue. Dry with a clean, lint-free cloth.
- 5. Clean the oven glass with glass cleaner or distilled vinegar. Re-install the side racks and wire shelves – position shelves with the curved end up and toward the rear of the oven.

When cleaning is complete, the oven must acclimate to room temperature in the environment where it is placed. Twenty four (24) hours is recommended.

The oven is now ready for operation.

EXTEND YOUR ORIGINAL MANUFACTURER'S WARRANTY Register online today at www.alto-shaam.com/warranty

Register your Alto-Shaam appliance online, and you will automatically be entered into a monthly drawing to win an additional year extended warranty!

Registering your equipment ensures prompt service in the event of a warranty claim. You will also receive direct notifications of software updates and additional product information.

Your personal information will not be shared with any other company.

ALTO-SHAAM 24/7 EMERGENCY REPAIR SERVICE

Call 800-558-8744 to reach our twenty-four hour emergency service call center for immediate access to local authorized service agencies outside standard business hours. The emergency service access is provided exclusively for Alto-Shaam equipment and is available throughout the United States through Alto-Shaam's toll free number.

Emergency service access is available seven days a week, including holidays.

CTP Combitherm



ntroduction 3	Recipe Programming	
Fable of Contents	Using Programmed Recipes	
	To cook with reprogrammed recipes	
Safety Procedures6	Editing Programmed Recipes	
Labels	Organizing Programmed Recipes	
	TIACCI Access	
Operation		
How To Turn On the Oven	•	. 46
How To Start a Manual Calibration16		
How To Calibrate theTouch Screen16		47
How To Turn Off the Oven		48
Control Panel Identification17	Connecting the Optional Grease Collection System	49
Home Screen	Connecting the Optional Liquid Cleaner	50
Utility Screen	Recipe Guidelines	51
Upload/Download Screen	Bakery Items	
Setting Screen 1	Convenience Product Items	
Setting Screen 2		
Preventative Maintenance Screen19	Fish & Seafood Items	
Preventative Maintenance - Editing19	Meat Recipes	
Software Updates20	Miscellaneous Recipes	
Cooking Screen Identification	Poultry Recipes	
Auxiliary Functions and Features22	Vegetable Recipes	60
Power Settings	Cleaning and Preventative Maintenance	. 62
Multiple Fan Speeds22	CombiClean® Cleaning Agents	62
Multi-Shelf Timer22	Preventive Maintenance	63
Preheat Features23	Weekly Maintenance	64
Cool Down Feature23	Daily Inspection	65
Humidity Control Feature	Weekly Inspection	66
Rapid Cool24	Monthly Inspection	67
Rest24	Yearly Inspection	68
Door24	Sweep Gasket Installation	71
Factory Default Settings25	Protecting Stainless Steel Surfaces	73
Cooking Modes - Steam26		
Steam Mode Operating Tips	Cleaning Materials	73
Cooking Modes - Combination28		
Combination Mode Operating Tips29		
Cooking Modes - Convection	Roll-In Cart/Food Trolley Cleaning	
Convection Mode Operating Tips		
Cooking Modes - Retherm32		
Retherm Mode Operating Tips33		
Cooking Modes - Dehydration	Troubleshooting	
Dehydration Mode Operating Tips35	Error Codes	
Cooking Modes - Delta-T Core Temperature	Touch Motor Control Error Codes	83
	Limited Warranty	



- The appliance is intended to cook, hold or process foods for the purpose of human consumption. No other use for this appliance is authorized and is therefore considered dangerous. The appliance must not be used to cook food containing flammable materials (such as food with alcohol). Substances with a low flash point can ignite spontaneously and cause a fire.
- The appliance is intended for use in commercial establishments where all operators are familiar with the purpose, limitations, and associated hazards of this appliance. Operating instructions and warnings must be read and understood by all operators and users. Alto-Shaam recommends regular staff training to avoid the risk of accident or damage to the appliance. Operators must also receive regular safety instructions.
- Any troubleshooting guides, component views, and parts lists included in this manual are for general reference only and are intended for use by qualified and trained technicians.
- This manual should be considered a permanent part of this appliance. This manual and all supplied instructions, diagrams, schematics, parts lists, notices, and labels must remain with the appliance if the item is sold or moved to another location.

Knowledge of proper procedures is essential to the safe operation of electrically and/or gas energized equipment. The following signal words and symbols may be used throughout this manual.

A DANGER

Indicates a hazardous situation that, if not avoided, will result in death or serious injury.

⚠ WARNING

Indicates a hazardous situation that, if not avoided, could result in death or serious injury.

A CAUTION

Indicates a hazardous situation that, if not avoided, could result in minor or moderate injury.

NOTICE: Indicates information considered important, but not hazard-related (e.g., messages relating to property damage).



For equipment delivered for use in any location regulated by the following directive: 2012/95/EC WEEE

Do not dispose of electrical or electronic equipment with other municipal waste.



- To prevent serious injury, death or property damage, the appliance should be inspected and serviced at least every twelve (12) months by an authorized service partner or trained technician.
- Only allow an authorized service partner or trained technician to service or to repair the appliance.
 Installation or repairs that are not performed by an authorized service partner or trained technician, or the use of non-factory authorized parts will void the warranty and relieve Alto-Shaam of all liability.
- When working on this appliance, observe precautions in the literature, on tags, on labels attached to or shipped with the appliance and other safety precautions that may apply.
- If the appliance is installed on casters, freedom of movement of the appliance must be restricted so that utility connections (including gas, water, and electricity) cannot be damaged when the appliance is moved. If the appliance is moved, ensure that all utility connections are properly disconnected. If the appliance is returned to its original position, ensure that retention devices and utility connections are properly connected.
- Only use the appliance when it is stationary. Mobile
 appliance racks, mobile plate racks, transport trolleys,
 and appliances on casters can tip over when being
 moved over an uneven floor or threshold and cause
 serious injury.
- Always apply caster brakes on mobile appliances or accessories when these are not being moved. These items could move or roll on uneven floors and cause property damage or serious injury.
- Be extremely careful when moving appliances because the food trays may contain hot fluids that may spill, causing serious injury.
- **Always** open the appliance door very slowly. Escaping hot vapors or steam can cause serious injury or death.

- If the gas appliance is installed under an exhaust hood, the hood must be switched **On** when the appliance is in use to avoid the build up of combustion gases. Failure to do so may result in serious injury, death or property damage.
- Accumulations on the main burners of gas appliances can result in firing out of normal sequence. This delayed ignition creates an alarmingly loud sound.
 If your appliance makes an especially loud noise when starting up, shut down the appliance and call a qualified and trained service technician.
- NEVER place objects near the appliance exhaust vents. This area is hot and could be a potential ignition source for a fire.
- Do not allow objects to block or obstruct the area below the appliance base. This may result in fire, damage to the equipment, or serious injury.
- Do not use the attached hand-held hose to spray anything other than the interior of the appliance compartment.
- Do not use the attached hand-held hose on the surface of a hot cooking compartment. The sudden temperature change can damage the appliance interior. Allow the appliance to cool to 150°F (66°C) or lower before using the hand-held hose. Failure to observe this precaution can void the warranty.

MARNING



This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision concerning use of the appliance by person responsible for their safety.

Children should be supervised to ensure that they do not play with the appliance.



MARNING



To prevent serious personal injury, death, or property damage:

Do not steam clean, hose down or flood the interior or exterior with water or liquid solution of any kind. **Do not** use water jet to clean. Failure to observe this precaution will void the warranty.

⚠ WARNING



To prevent **SERIOUS PERSONAL INJURY** or **PROPERTY DAMAGE**:

DO NOT handle pans containing liquid or semiliquid products positioned above the eye level of the operator. Such products may scald and cause serious injury.

WARNING



DO NOT obstruct or block exhaust flues or attach any flue extension that may impede proper burner operation, restrict the exhaust fumes and cause negative backdraft or the appliance to shut down. Failure to do so may result in serious injury or death.

⚠ WARNING



To prevent serious personal injury, death, or property damage:

The appliance must be cleaned thoroughly to avoid deposits of grease and or food residues inside the appliance that may catch fire. If fat deposits and/or food waste inside the appliance ignite, shut down the appliance immediately and keep the appliance door closed to extinguish the fire. If further extinguishing is required, disconnect the appliance from the main power and use a fire extinguisher (do not use water to extinguish a grease fire!). Failure to clean the appliance properly invalidates the warranty and relieves Alto-Shaam of all liability.

A CAUTION



To prevent **personal injury** or **property damage**:

Always use hand protection when operating this appliance to avoid burns. Metal parts of this equipment become extremely hot when in operation.

⚠ CAUTION



To prevent **INJURY** or **PROPERTY DAMAGE**, make certain the area around the appliance is kept clear of combustible items.

Safevent™ Feature

NOTICE: Automatic steam venting is a standard safety feature built into all Combitherm oven models. This feature vents all steam from the oven compartment immediately before cooking time expires or set probe temperature is reached.



Automatic steam venting does not function if the oven door is opened before time expires or when the oven has been set to continuous operation.

NOTICE: Use authorized Combitherm oven cleaner only.
Unauthorized cleaning agents may discolor or
harm interior surfaces of the oven. Read and
understand label and material safety data sheet
before using the oven cleaner.



MADE IN U.S.A	Made in U.S.A.
	WARNING
	Hot surface
	WARNING
	Electric shock hazard
⚠ WARNING / ADVERTENCIA / AVERTISSEMENT	WARNING
when heated, at an eye level where they can be seen. Peligro de quemaduras. Siempre coloque líquidos, o alimentos que se puedan volver líquidos cuando se calientan, a nivel de los ojos donde se puedan ver. Risque de brûlure. Toujours charger les liquides, ou les aliments qui deviennent líquides au chauffage, à hauteur des yeux où ils peuvent être vus. LA-39123	Burn hazard Always load liquids, or foods that can become liquid when heated, at an eye level where they can be seen.
LA-39155	
ALTO-SHAAM. Every Alto-Shaam product is precision calibrated prior to release from the factory to ensure accurate temperature control.	Every Alto-Shaam product is precision calibrated prior to release from the factory to ensure accurate temperature control.
CALIBRATION TECHNICIAN	
LA-26378	



	Line 1 supply terminal
L1	
LA-36443-L1	
	Line 2 supply terminal
L2	
LA-36443-L2	
	Line 2 americal
	Line 3 supply terminal
L3	
LA-36443-L3	
12 /	Neutral
L2/N	
LA-36443-L2/N	
	Ground terminal
LA-36443-G	
	Equipotential terminal
LA-36443-E	
	Drain water connection point.
LA-38911	
	Untreated, drinkable water connection point.
[[
$\parallel \delta \parallel$	
LA-38910	
	Treated, drinkable water connection point.
	The state of the s
\	
LA-38909	





	Σ kg max.	Σ liter max.	Σ GN 1/1
6-10	33	57	6
10-10	54	95	10
7-20	76	133	14
10-20	109	190	20
20-10	109	190	20
20-20	218	380	40

LA-38940

Capacities



⚠ WARNING/ADVERTENCIA/AVERTISSEMENT

Fire Hazard

This unit is only for use with factory-supplied legs, casters, or base.



Peligro de incendio


This unit is only for use with factory-supplied legs, casters, or base.

Risque d'incendie

This unit is only for use with factory-supplied legs, casters, or base.

Fire hazard

This unit is only for use with factory-supplied legs, casters, or base. Read the installation manual.

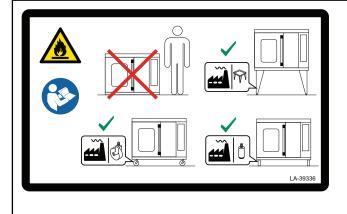







Steam Open carefully.

Vapor Abrir con cuidado.

Vapeur Ouvrir avec précaution.

LA-39122

Warning

Steam. Open door carefully.








WARNING ADVERTENCIA AVERTISSENENT



Failure to follow cleaning instructions can cause injury or equipment damage. Clean oven only with Combitherm cleaner. Cleaner is caustic. Avoid contact with skin or eyes. Wear PPE. Read and understand the Combitherm cleaner safety data sheet and the operator's manual before cleaning.



Respecter les instructions de nettoyage pour écarter les risques de blessures ou de dégâts matériels. Nettoyer le four uniquement avec un produit nettoyant Combitherm. Le produit nettoyant est caustique. Éviter le contact avec la peau et les yeux. Porter un EPI. Lire et comprendre la fiche de données de sécurité du produit nettoyant Combitherm et le manuel de l'utilisateur avant de nettoyer.



Failure to follow cleaning instructions can cause injury or equipment damage. Clean oven only with Combitherm cleaner. Cleaner is caustic. Avoid contact with skin or eyes. Wear PPE. Read and understand the Combitherm cleaner safety data sheet and the operator's manual before cleaning





↑ WARNING/ADVERTENCIA/AVERTISSMENT

Electric Shock Hazard

Appliances with permanent electrical connection that are mounted on casters must be secured to building structure.

Read installation instructions.



Peligro de descarga eléctrica


Los equipos con una conexión eléctrica permanente que estén montados sobre ruedas deben estar fijos a la estructura del edificio.

Lea las instrucciones de instalación.

Risque d'électrocution

Les appareils à branchement électrique fixe qui sont montés sur roulettes doivent être attachés à la structure du bâtiment.


Lire les instructions d'installation.

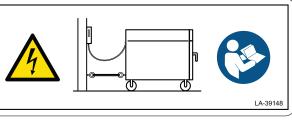

Warning

Electric Shock Hazard

Appliances with permanent electrical connection that are mounted on casters must be secured to building structure. Read installation instructions.

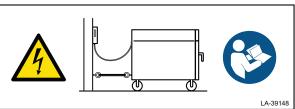

WARNING/ADVERTENCIA/AVERTISSENENT

WARNING:



Improper installation, adjustment, alteration, service or maintenance can cause property damage, injury or death. Read the installation, operating and maintenance instructions thoroughly before installing or servicing the equipment.



Water and waste connection shall comply with the basic plumbing code of the Building Officials and Code Administrators International, Inc. (BOCA) and the Food Service Sanitation Manual of the Food and Drug Administration (FDA).

ADVERTENCIA:

Una instalación, ajuste, modificación, reparación o mantenimiento inadecuado podría producir daños en el equipo, lesiones personales e incluso la muerte. Lea las instrucciones de instalación, funcionamiento y mantenimiento detenidamente antes de instalar o reparar el equipo.

La conexión de agua y de aguas residuales debe cumplir el Código de Tuberías Básico (Basic Plumbing Code) de Building Officials y Code Administrators International, Inc. (BOCA), y el Manual de Sanidad de Servicio de Alimentos (Food Service Sanitation Manual) de la Administración de Drogas y Alimentos (FDA, por sus siglas en inglés).

AVERTISSEMENT:

L'installation, le réglage, la modification, la réparation ou l'entretienincorrect de cet appareil peut causer des dommages matériels, des blessures ou la mort. Lire attentivement lesinstructions d'installation, de fonctionnement et d'entretien avant de procéder à son installation ou entretien.

Le raccordement d'eau et d'évacuation doit être conforme au Basic Plumbing Code de BOCA (Building Officials and Code Administrators International, Inc.) et au Food Service Sanitation Manual de la FDA (Food and Drug Administration).

Warning

Improper installation, adjustment, alteration, service or maintenance can cause property damage, injury or death. Read the installation, operating and maintenance instructions thoroughly before installing or servicing the equipment.

Water and waste connection shall comply with the basic plumbing code of the Building Officials and Code Administrators International, Inc. (COCA) and the Food Service Sanitation Manual of the Food and Drug Administration (FDA).



MARNING/ADVERTENCIA/AVERTISSEMENT



Fire Hazard

For use only on noncombustible surfaces. Maintain the correct clearances to combustibles.

Peligro de incendio

Solo para uso en superficies no combustibles.

Mantenga las distancias correctas de elementos combustibles.

Risque d'incendie

Utilisation sur des surfaces non combustibles seulement.

Maintenir des dégagements corrects par rapport aux matières combustibles

	Combustibles	Non-combustibles
Top/tope/haut	20" (508mm)	20" (508mm)
Left/izquierda/gauche	0" (0mm)	0" (0mm)
Right/derecho/droite	2" (51mm)	0" (0mm)
Rear/posterior/arrière	4" (102mm)	4" (102mm)


LA-38906



Fire Hazard

For use only on noncombustible surfaces. Maintain the correct clearances to combustibles.

Read the installation instructions.

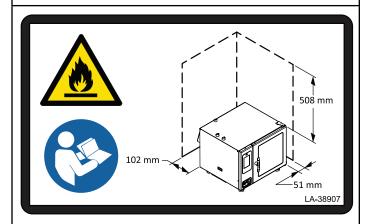

COA #5760

LA-39312

 $\label{lem:city} \textbf{City of New York Fire Department condition of acceptance number.}$

NOTICE/AVISO/AVIS

For trained personnel only: The installation manual and the wiring diagram for this appliance can be found inside the oven attached to the opposite side of this panel.

Solo para personal capacitado: El manual de instalación y el diagrama de cableado de este equipo se pueden encontrar dentro del horno, en el lado opuesto de este panel.

Personnel formé seulement : Le manuel d'installation et le schéma de câblage de cet appareil se trouvent à l'intérieur du four attachés de l'autre côté de ce panneau.

LA-38941

Notice

For trained personnel only: The installation manual and the wiring diagram for this appliance can be found inside the oven attached to the opposite side of this panel.

XXX



WARNING/ADVERTENCIA/AVERTISSEMENT

Electric Shock Hazard

To reduce the risk of electric shock, do not remove or open cover. No user-serviceable parts inside.

Refer servicing to qualified personnel. Qualified personnel: Disconnect power before servicing.

Peligro de descarga eléctrica

Para reducir el riesgo de descarga eléctrica, no retire ni abra la cubierta. No hay piezas en el interior a la que se les pueda realizar mantenimiento. Derive el mantenimiento a personal calificado.

Personal calificado: Desconecte la energía antes de realizar mantenimiento.

Danger de décharge électrique
Pour réduire le risque de décharge électrique, ne par
ouvrir ni retirer le capot. Ne contient pas de pièces
réparables par l'étilisateur. Confier les réparations à du personnel qualifié. Personnel qualifié : Sectionnez l'alimentation avant

toute intervention

Warning

Electric shock hazard.

To reduce the risk of electric shock, do not remove or

open cover. No user-serviceable parts inside. Refer servicing to qualified personnel.

Qualified personnel: Disconnect power before servicing.

/		_
/	UseAWG for supply connections.	
	Use only copper wires suitable for temperatures ≥ 90°C.	7
	Do not connect to a circuit operating at more than 150 VAC to ground.	AWG
	For use on individual branch circuits only.	
	Use AWG para las conexiones de suministro. Use solo cables de cobre aptos para temperaturas mayores que 90 °C. No conecte a un circuito que funcione a más de 150 V CA a tierra. Para su uso en circuitos derivados individuales solamente.	
	Utiliser du calibreAWG pour les raccordements électriques.	
	Utiliser exclusivement des conducteurs en cuivre qui conviennent à des températures $\geq 90~^\circ\text{C}.$	
	Ne pas raccorder à un circuit fonctionnant sous plus de 150 VCA par rapport à la terre.	
	Utiliser exclusivement sur des circuits de dérivation propres.	ΙΔ-38852

Use _____AWG for supply connections.

Do not connect to a circuit operating at more than 150 VAC to ground. For use on individual branch circuits only. Use only copper wires suitable for temperatures ≥ 90°C.

NOTICE: Use only factory-supplied casters when needed. When this appliance includes casters, the following must also be installed:

- · a connector complying with ANSI Z21.69 / CSA 6.16;
- a quick-disconnect device complying with ANSI Z21.41 / CSA 6.9;
- a restraining device to guard against transmission of strain to the connector as specified in the manual.

AVISO: Solo use ruedas proporcionadas de fábrica cuando sea necesario. Si este equipo incluye ruedas, también se debe instalar

- un conector que cumpla con las normas ANSI Z21.69 y CSA 6.16;
- un dispositivo de desconexión rápida que cumpla con las normas ANSI Z21.41 y CSA 6.9;
- un dispositivo de sujeción para proteger contra la transmisión de tensión al conector como se especifica en el manual.

AVIS: S'il y a lieu, utiliser uniquement les roulettes fournies par le fabricant. Si cet appareil comporte des roulettes, les articles suivants doivent également être installés

- un connecteur conforme à ANSI Z21.69 / CSA 6.16;
- un raccord découpleur rapide conforme à ANSI Z21.41 / CSA 6.9;
- un moyen de retenue pour empêcher la transmission de la contrainte au connecteur comme indiqué dans le manuel.

LA-25784

NOTICE: Use only factory-supplied casters when needed. When this appliance includes casters, the following must also be installed:

- a connector complying with ANSI Z21.69 / CSA 6.16;
- a quick-disconnect device complying with ANSI Z21.41 / CSA 6.9;
- a restraining device to guard against transmission of strain to the connector as specified in the manual.



How to Turn On the Oven

Prerequisites

- 1. Turn on the exhaust hood.
- 2. Make sure that the water supply to the oven is turned on.
- 3. Make sure that the electrical power supply to the oven is turned on
- 4. For gas ovens, make sure the gas supply valve is in the open position.

Steps

1. Press the ON/OFF button **()**

The ON/OFF indicator glows green and the loading screen ① displays while the controller software loads. When the software is 100% loaded, the home screen ② displays.

NOTE: If the oven has a steam generator, the steam generator fills with water and the oven heats the water to an initial temperature of 188°F (77°C).

How to Start a Manual Calibration

- 1. Make sure the oven is off.
- 2. Press and hold the ON/OFF button of for eight (8) seconds. The ON/OFF indicator glows red and the calibration prompt ③ displays.

The prompt moves from the center to all four corners of the screen. This sequence repeats three (3) times. Then the calibration screen (4) displays.

NOTE: The first time the oven is turned on, or if the oven loses power during startup, the touchscreen calibration prompt ③ displays at the end of the next startup.

NOTE: Touch the check mark icon to start the calibration immediately. Touch the cancel icon to cancel the calibration.

How to Calibrate the Touchscreen

- 1. Touch the target icon (+) each time it appears on screen. The icon appears in all four corners, then the center of the screen.
 - NOTE: If the controller software has not been updated to the current version (11/16 update), the calibration stops when this step is complete. Download the current controller software from the Alto-Shaam website and install it.
- 2. The verification screen (5) displays. Touch all five target icons (D). The icons change to green boxes when they are touched.

NOTE: The calibration screen and verification screen both display a 30-second countdown. If you do not touch all five icons before the countdown is complete, the controller stops the calibration. If you do not see the countdown, download the current controller software from the Alto-Shaam website and install it.

How to Turn Off the Oven

1. Press and hold the ON/OFF button for five to ten (5-10) seconds.

DANGER



Before starting the appliance, make certain you do not detect the odor of gas.

If you smell gas:


- Shut off the gas supply immediately.
- Do not attempt to light any appliance.
- Do not touch any electrical elements.
- Extinguish any open flame.
- Evacuate the area.
- Use a telephone outside the property and immediately contact your gas supplier.
- If unable to contact your as supplier, contact the fire department.


CAUTION



Accumulations on the main burners of gas appliances can result in firing out of normal sequence. This delayed ignition creates an alarmingly loud sound. If your appliance makes an especially loud noise when starting up, shut down the appliance and call a qualified and trained service technician.






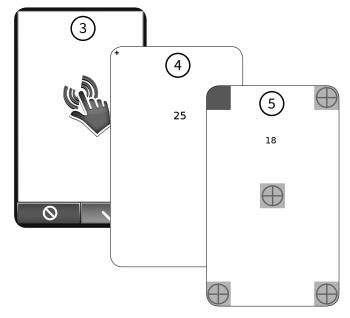





Control Panel Identification

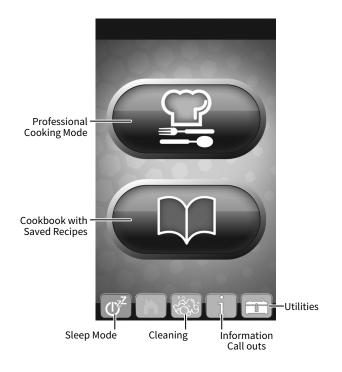

Utility Screen

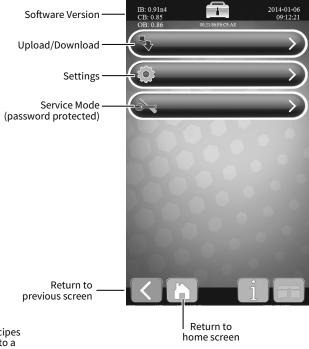

Upload/Download Screen

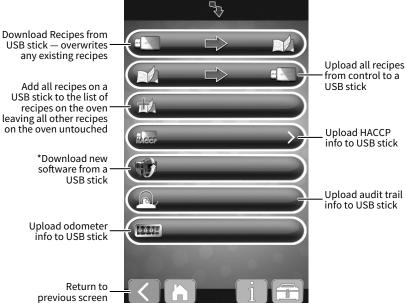


*The PROtouch control plays an important part in our continuous improvement process. New features and abilities can be loaded to your oven as they become available. Software for your oven can be accessed from the Alto-Shaam website, under the Downloads tab.



Control Panel Identification


Settings Screen 1

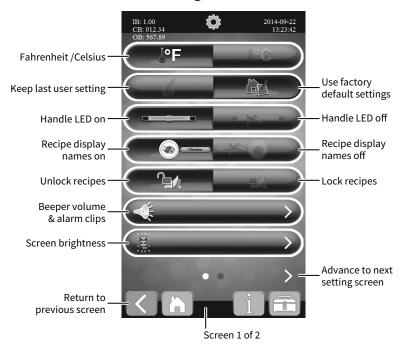

When a setting has been selected, the graphic will be vibrant in color while the alternate choice will appear faded and gray. In the illustration above, Fahrenheit, factory default setting, handle LED on, recipe display with text, and recipes are not locked have been chosen.

NOTE: A password is required to lock and unlock the recipes. Simply call an Alto-Shaam Culinary Chef for assistance.

Settings Screen 2

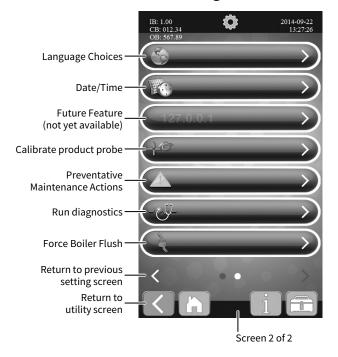

Language choices available: English, French, German, Korean, Mandarin, Russian, or Spanish.

Time format available: 12-hour clock 24-hour clock


Different date formats available: YYYY/MM/DD MM/DD/YYYY DD/MM/YYYY






Control Panel Identification

Preventative Maintenance Screen

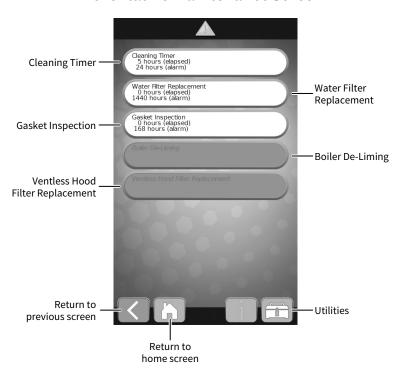

Preventative Maintenance - Editing

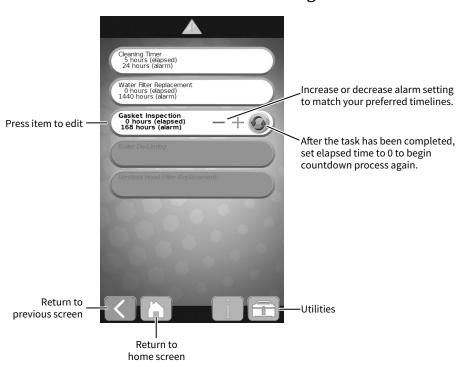



Software Updates

The PROtouch controller plays an important part in our continuous improvement process. New features and abilities can be loaded to your oven as they become available. Software for your oven can be accessed from the Alto-Shaam website, under the Resource Library Tab, then Software Center. http://www.alto-shaam.com/en/software-downloads

Use a USB drive to copy the PROtouch software from the website to the USB drive.



Press the ON button to power the oven on.



Touch the utilities icon.



Touch the download icon.



Touch the download new software icon.

Most software updates will require the full oven update as shown below. Additional options are available in the event a special need arises. Call our Service Department for assistance with these special circumstances.

Remove the cover of the USB port on the oven.

Insert the USB drive. If the USB drive is not recognized by the Combitherm, a question mark will appear on screen. Try again with another flash drive device or call Alto-Shaam Service.

When the data has made a successful transfer to the USB drive, the screen will change.


Touch the green check mark icon to complete the process.

Remove the USB drive and replace the cover on the USB port on the oven.




NOTICE: After the software update has been completed, the oven may automatically initiate a shutdown and reboot sequence if required.

Software Upload Screen

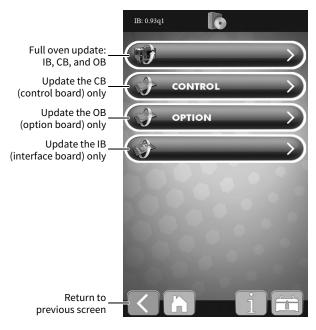



Cooking Screen Identification

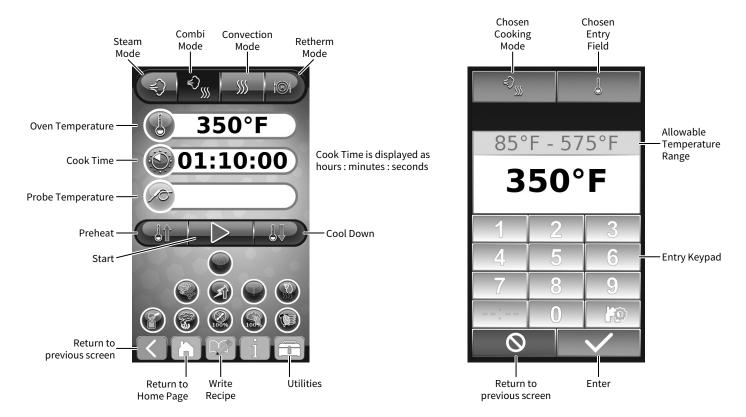

NOTE: When a cooking mode has been selected, it will appear darker blue. When the cooking mode is calling for heat, it will appear red. When the cooking mode is calling for moisture, it will appear light blue. In the illustration above, Combi Mode has been chosen and is calling for heat. Also, the PROpower™ level has been chosen, and the fan speed has been set at 100%.




Auxiliary Functions and Features

Power Settings

Two power levels: reduced power to manage kitchen power peaks, and eco power for optimal oven efficiency.

A third choice is optional on electric models, but standard on gas models. PROpowerTM is an accelerated turbo power for an instant boost of heat or quick heat recovery [patent pending].

NOTE: Reduced power will result in longer cooking times and PROpower will decrease your cooking time by several minutes.

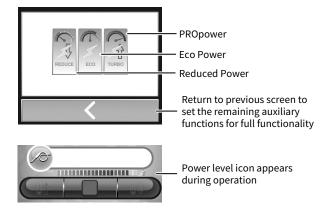


Multiple Fan Speeds

The PROtouch™ control includes five different fan speeds. The reduced fan speed function is useful for flow-sensitive products such as soufflés and meringues, or any products affected by a high velocity of air movement.


NOTE: Fan speed choices are based upon the power level you have chosen.

Fan speed choices



Multi-Shelf Timer

The multi-shelf timer allows the operator to program alarm times for the oven shelves. This can be one common time for corresponding oven shelves or by food item that is cooking. The multi-shelf timer can be edited when in a recipe mode.

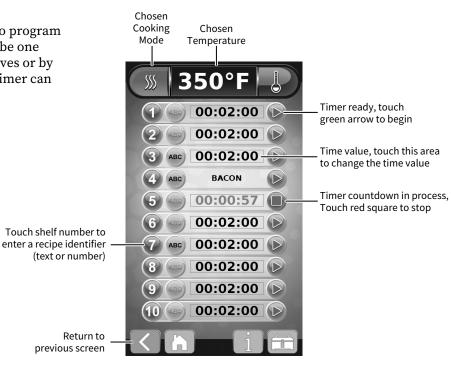



Auxiliary Functions and Features

Preheat Feature

The oven should be preheated before most cooking functions. When cooking full loads, use a temperature 50°F (10°C) greater than the cook temperature in order to recover from heat loss when the door is opened to add food to the oven. For items that use the Steam mode, it is necessary to use a preheat temperature lower than the cook temperature in order to create the proper amount of steam.



Press the On button to power oven on.




Touch the Preheat icon.

Type in desired temperature.



Touch the green Check Mark icon to start preheating.

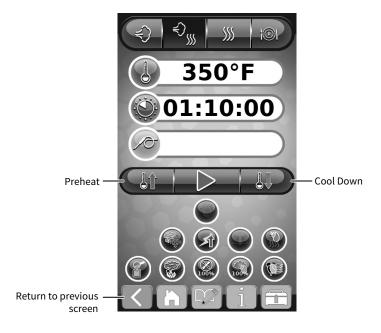

Cooldown Feature

The cooldown feature provides the operator with the ability to lower the temperature of the oven compartment at an accelerated pace. This function is useful when it is necessary to immediately change from a high temperature cooking function to a lower temperature function or to the steam program. This function is also useful to help cool the oven compartment in preparation for cleaning.

TIP: Always allow the oven walls to cool to a minimum of 140°F (60°C) before spraying the compartment with oven cleaner.

Open the oven door.



Touch the Cooldown icon.

Type in desired temperature.



Touch the green Check Mark icon to begin the Cooldown process.

The target oven temperature chosen will appear just above the red Stop button.

The current oven temperature will appear at the top of the screen.





Auxiliary Functions and Features

Humidity Control Feature

The humidity control feature is an automatic function designed to regulate humidity to provide additional color to food as needed. This feature is particularly useful for adding color to high moisture products such as chicken and other poultry, or for additional browning of full loads and other moist products. In addition, this feature may be used to add texture to fried items such as french fries or breaded chicken. Humidity control can be used in any cooking mode and can be programmed into a cooking procedure.

Touch the nearest 10% increment on the left side of the screen, and then adjust up or down using the + or – icons.

0% humidity is the driest cooking environment available. The percentage level chosen will appear on the icon. In the illustration at right, 72% is shown.

Rapid Cool (available on boiler-free models only)


This function, when used with a program, rapidly removes heat from the oven cavity. Swiftly move from a high cooking temperature to a lower temperature without overcooking your food.

Rest


This step allows you to pause the oven during a program. The rest step is ideal for cold smoking or automatic cleaning. Infuse your food with smoke flavor after the actual smoking step has stopped.

Door

The door function allows the user to program a reminder—in the form of an animated door opening and closing—that it is time to open the door. This reminder may be programmed at the end of a programmed segment or at the end of the program.

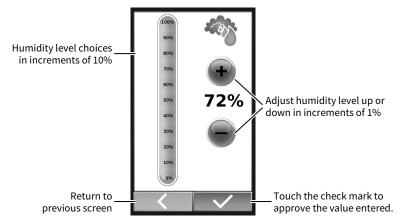



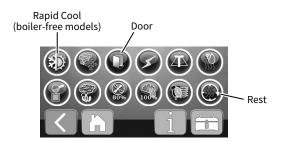



CT PROformance™ Factory Default Settings

Cooking Mode	Oven Temperature	Core Temperature	Cooking Time
Steam	212°F (100°C)	160°F (70°C)	25 minutes
Combination Steam	350°F (175C)	160°F (70°C)	70 minutes
Convection	350°F (175C)	160°F (70°C)	30 minutes
Retherm	275°F (135°C)	160°F (70°C)	5 minutes



Steam Mode



The Steam mode provides the operator with the ability to steam, poach, or blanch. This mode will automatically steam at the boiling point of water; quick-steam above the boiling point for faster cooking results; or low temperature steam, below the boiling point, for more delicate products such as pâté, mousse, seafood, or custard.



Press the On button to power oven on.



Touch the Professional Cooking mode icon.



Touch the Steam mode icon.



Touch the Start icon to steam at the displayed settings.

To Change the Displayed Settings:



Touch the area to the right of the temperature icon.

Type in desired temperature.



Touch the green Check Mark icon to confirm change.

- Automatic Steaming 212°F (100°C)
- Quick Steaming 213°F to 250°F (101°C to 120°C)
- Low Temperature Steaming 85°F to 211°F (30°C to 99°C)

To Cook by Time:



Touch the area to the right of the time icon.

Type in desired time or set continuous time by touching --:--.



Touch the green Check Mark icon to confirm change.

To Cook by Product Core Temperature:



Touch the area to the right of the probe icon.

Type in desired temperature.



Touch the green Check Mark icon to confirm change.

Insert probe into product.

Set available auxiliary functions as desired, such as energy level, fan speed, multi-shelf timer, etc.



Touch the Start icon to begin cooking in the Steam mode.

- The cavity set-temperature will appear in the display.
- If cooking by probe, the actual internal product temperature will appear next to the probe icon during operation. To change the set value for core temperature, touch the temperature next to the probe icon and make changes as required.

When the cooking time has expired or the desired core temperature has been reached, an alarm will sound and handle light will flash several times indicating the end of the operating mode.



Touch the red Stop icon to stop the buzzer or open the oven door.



To stop cooking program at any time, touch the red Stop icon.

A CAUTION HOT

Use caution when opening the oven door when the cooking chamber is hot to avoid possible burns.



Steam Mode Chef Operating Tips



This mode will steam a full or partial load of a single product, or multiple products without transfer of flavors. When steaming multiple products, however, individual product cooking times must be taken into consideration.

The non-pressurized atmosphere of the Combitherm also provides the ability to open the door during the steam mode in order to monitor products more closely throughout the steaming process.

Steam

Perforated, 2-1/2" (65mm) deep pans are particularly suitable for use in this program mode. These pans will provide a shorter cooking time and will prevent product over-cooking at the bottom of the pan.

Separate ice-encrusted vegetables before steaming to ensure even cooking.

A variety of products can be steamed at the same time but attention must be paid to the different cooking times required for each food product.

When cooking by probe, the probe must be inserted so that the tip is positioned in the center of the food mass. For liquid or semi-liquid foods, suspend the probe in the center of the product and secure the probe wire to the edge of the container.

High Temp Steam

High temperature steaming is suitable for hearty, root-type vegetables such as potatoes, turnips, carrots, and cabbage. High temperature steaming provides a cooking time which is approximately 10% shorter than the regular steam mode temperature of 212°F (100°C).

Low Temp Steam

The low temperature steam mode will function whenever the oven compartment temperature is below 212°F (100°C).

It will take longer to steam products using the low temperature steam mode.

Steaming sausages in low temperature steam prevents cracked or peeling skins.

Use low temperature steam for delicate foods such as shrimp, fish, seafood, crème caramel, and sous vide.

For best results, low temperature steam all delicate food items at a temperature of 210°F (99°C) or below.

Safevent ™ Feature

The safevent[™] feature of the Alto-Shaam Combi oven automatically vents the oven 60 seconds prior to the end of a recipe. This allows the door to be opened without exposing the operator to hot steam.



Combination Mode



The Combination mode will prove to be the most versatile and widely used mode the Combitherm oven has to offer. It will produce the best possible results on the widest variety of products — all within the shortest period of time. The unique control function of this mode enables the operator to roast or bake with a combination of steam and convection heat. In addition to shorter cooking times, this combination of steam and heat offers less product shrinkage and more moisture retention than obtained in a convection oven.



Press On button to power oven on.



Touch the Professional Cooking mode icon.



Touch the Combination mode icon.



Touch the Start icon to cook at the displayed settings.

To Change the Displayed Settings:



Touch the area to the right of the Temperature icon.

Type in desired temperature.



Touch the green Check Mark icon to confirm change.

 Cooking temperature range: 85°F to 575°F (30°C to 301°C)

To Cook by Time:



Touch the area to the right of the time icon.

Type in desired time or set continuous time by touching --:--.



Touch the green Check Mark icon to confirm change.

To Cook by Product Core Temperature:



Touch the area to the right of the Probe icon.

Type in desired temperature.



Touch the green Check Mark icon to confirm change.

Insert probe into product.

Set available auxiliary functions as desired, such as energy level, fan speed, multi-shelf timer, steam injection, etc.



Touch the Start icon to begin cooking in the Steam mode.

- The cavity set-temperature will appear in the display.
- If cooking by probe, the actual internal product temperature will appear next to the PROBE icon during operation.
 To change the set value for core temperature, touch the temperature next to the PROBE icon and make changes as required.

When the cooking time has expired or the desired core temperature has been reached, an alarm will sound and handle light will flash several times indicating the end of the operating mode.



Touch the red Stop icon to stop the buzzer or open the oven door.



To stop cooking program at any time, touch the red Stop icon.

A CAUTION HOT

Use caution when opening the oven door when the cooking chamber is hot to avoid possible burns.



Combination Mode Chef Operating Tips



The Combination mode injects the optimum amount of steam automatically. There is no need to select humidity levels. Foods do not dry out. Flavors are retained with no transfer of flavors when mixing product loads.

Due to automatic steam adjustment, the door can be opened at any time during a cooking operation. Be certain to observe the safety warning when opening the oven door.

The Combination mode is particularly efficient when used for baking, broiling, grilling, stewing, braising, and roasting.

When using the Combination mode, cooking temperatures can be reduced 10%–20% below the temperatures used for conventional cooking methods.

Cooking time will be reduced approximately 40% when cooking at the same temperature used for convection oven cooking and up to 50%–60% less time when cooking at the same temperature used for a conventional oven.

Food browning in the Combitherm begins at a cooking temperature of approximately 250°F (120°C).

A higher cooking temperature results in heavier browning but also results in greater product weight loss. To achieve additional browning set humidity control into the product procedure. Humidity control is particularly useful for adding color to high moisture products such as chicken and other poultry items or for additional browning of full loads and other moist products.

The Combination mode provides even browning without the necessity to turn the pans.

For more even cooking, do not cook in pans deeper than 4" (100mm).

When cooking by probe, the probe must be inserted so that the tip is positioned in the center of the food mass. For liquid or semi-liquid foods, suspend the probe in the center of the product and secure the probe wire to the edge of the container.



Convection Mode



The Convection mode operates with hot circulated air within a temperature range of 85°F to 575°F (30°C to 300°C). For many applications, better results may be achieved with the Combination mode; therefore, the operator may want to consider using the Convection mode on a more limited basis. The use of high temperatures (500°F to 575°F) are not intended for continuous use.



Press On button to power oven on.



Touch the Professional Cooking mode icon.



Touch the Convection mode icon.



Touch the Start icon to cook at the displayed settings.

To Change the Displayed Settings:



Touch the area to the right of the temperature icon.

Type in desired temperature.



Touch the green Check Mark icon to confirm change.

• Cooking temperature range: 85°F to 575°F (30°C to 300°C)

To Cook by Time:



Touch the area to the right of the Time icon.

Type in desired time or use up and down arrows to adjust temperature or set continuous time by Touching --:--.



Touch the green check mark key to confirm change.

To Cook by Product Core Temperature:



Touch the area to the right of the Probe icon.

Type in desired temperature.



Touch the green check mark key to confirm change.

Insert probe into product.

Set available auxiliary functions as desired, such as energy level, fan speed, multi-shelf timer, steam injection, etc.



Touch the Start icon to begin cooking in the Steam mode.

- The cavity set-temperature will appear in the display.
- If cooking by probe, the actual internal product temperature will appear next to the probe icon during operation. To change the set value for core temperature, touch the temperature next to the probe icon and make changes as required.



Touch steam Injection at any time during cooking. Steam will inject into the cavity as long as the icon is touched.

When the cooking time has expired or the desired core temperature has been reached, an alarm will sound and handle light will flash several times indicating the end of the operating mode.



Touch the red Stop icon to stop the buzzer or open the oven door.



To stop cooking program at any time, touch the red Stop icon.

A CAUTION HOT

Use caution when opening the oven door when the cooking chamber is hot to avoid possible burns.



Convection Mode Chef Operating Tips



The Convection Mode can be used to roast or bake products needing very short cooking times or for high moisture products such as muffins, cakes, and cookies, or for browning the surface of the food.

The Convection mode works best with low moisture foods or for very moist food which require a dryer finished product.

For baking, preheat the Combitherm at a temperature of 325°F to 375°F (163°C to 191°C). Once preheated, reset the temperature as required.

A higher cooking temperature results in heavier browning but also results in greater product weight loss. To achieve additional browning set the Humidity control into the product procedure.

When cooking by probe, the probe must be inserted so that the tip is positioned in the center of the food mass. For liquid or semi-liquid foods, suspend the probe in the center of the product and secure the probe wire to the edge of the container.



Retherm Mode



The Retherm mode operates with hot circulated air within a temperature range of 245°F to 320°F (120°C to 160°C).



Press On button to power oven on.



Touch the Professional Cooking mode icon.



Touch the Retherm mode icon.



Touch the Start icon to retherm at the displayed settings.

To Change the Displayed Settings:



Touch the area to the right of the Temperature icon.

Type in desired temperature.



Touch the green Check Mark icon to confirm change.

 Cooking or retherming temperature range: 245°F to 320°F (120°C to 160°C)

To Cook by Time:



Touch the area to the right of the Time icon.

Type in desired time or set continuous time by touching --:--.



Touch the green Check Mark icon to confirm change.

To Cook by Product Core Temperature:



Touch the area to the right of the Probe icon.

Type in desired temperature.



Touch the green Check Mark icon to confirm change.

Insert probe into product.

Set available auxiliary functions as desired, such as energy level, fan speed, multi-shelf timer, steam injection, etc.



Touch the Start icon to begin cooking in Steam mode.

- The cavity set-temperature will appear in the display.
- If cooking or retherming by probe, the actual internal product temperature will appear next to the PROBE icon during operation. To change the set value for core temperature, touch the temperature next to the PROBE icon and make changes as required.



Touch Steam Injection at any time during cooking. Steam will inject into the cavity as long as the icon is touched.

When the cooking time has expired or the desired core temperature has been reached, an alarm will sound and handle light will flash several times indicating the end of the operating mode.



Touch the red Stop icon to stop the buzzer or open the oven door.



To stop cooking program at any time, touch the red Stop icon.

A CAUTION HOT

Use caution when opening the oven door when the cooking chamber is hot to avoid possible burns.



Retherm Mode Chef Operating Tips



Since plated meals consist of dissimilar products, there are several important factors to consider in order to produce the finest results. Product density (compactness), thickness, quantity of product on each plate, and quantity of plates all relate to the length of time necessary to reheat. Again, experience is the best method to determine reheating time. Once the time has been determined and recorded for a specific meal, the results will be consistent for future reheating times.

Helpful Hints For Reheating On The Plate

- All food components on the plate should be of similar densities and thickness.
- Arrange all food components evenly on the plate.
- Avoid excessive overlapping of product.
- Sauces must be heated and added to product after reheating.
- A mixed variety of meals can be reheated at the same time.

À La Carte Rethermalization

À la carte rethermalization is designed to take a single plate from a refrigerated temperature to serving temperature for immediate service. Plates are prepared in advance, covered, and refrigerated. Preheat the Combitherm oven. Remove plate from refrigeration and place in the oven at 275°F (135°C) for an uncovered plate or 300°F (150°C) for a covered plate. Plates with meat components will take more time than plates containing all vegetable components. Follow internal temperature requirements for reheating and allow for override time. After reheating, remove the plate from the oven, add any sauces, garnish, and serve. This process can be repeated as required.

For the most efficient continuous service, it is suggested that the Combitherm oven be dedicated to the rethermalization process during serving hours.

Banquet Rethermalization

Banquet rethermalization is designed for high volume, full or partial load (multiple plate) reheating.

Plates are assembled in advance, covered, and refrigerated or loaded on the roll-in cart and refrigerated. Preheat the Combitherm oven at 275°F (135°C) for uncovered plates or 300°F (150°C) for covered plates. Remove plates or the roll-in cart from refrigeration, load in the oven and set timer as required. Follow internal temperature requirements for reheating and allow for override time. Remove the plates or roll-in cart from the Combitherm.

Placing our thermal blanket cover over the roll-in cart keeps food hot for 20 to 40 minutes, depending on the type of food, retherm temperature, and environmental factors. For longer holding times, roll the cart into the CombiMate® companion holding cabinet.

Rethermalizing Prefabricated and Vacuum-Packed Frozen Foods

For bulk product rethermalization, completely defrost product bags in walk-in cooler. DO NOT REMOVE PRODUCT FROM THE BAG. Load thawed bags in preheated oven and rethermalize in the Low Temperature Steam mode until the required internal temperature is reached. Place rethermalized bags in a preheated holding cabinet set at 140° to 165°F (60° to 74°C) until ready for service.

For large volume on-the-plate regeneration, defrost bags in walk-in cooler. Open bags and plate per menu requirements in a (maximum) 55°F (13°C) refrigerated room. Place on Alto-Shaam roll-in cart (trolley), and roll into Combitherm oven preheated at 275°F (135°C).

Regenerate in the Convection mode for 3 to 5 minutes. Switch to the Retherm mode for an additional 3 minutes or more if required. Placing our thermal blanket cover over the rollin cart keeps food hot for 20 to 40 minutes, depending on the type of food, retherm temperature, and environmental factors. For longer holding times, roll the cart into the CombiMate® companion holding cabinet.

Plate covers must be used for on-the-plate regeneration.



Dehydration Mode



Dehydration is a long, slow process that takes place at low heat and zero humidity. It changes the physical properties of food items and intensifies flavors. Dehydrated items can be combined and presented in new and unexpected ways, from pliable leathers to crispy chips to powders. Dehydration is also an effective way to preserve food items for long-term storage with minimal impact on flavor.


How To Cook Using Dehydration Mode


- 1. Touch the dehydrate icon e. The controller does the following:
 - Sets the cooking mode ① to convection.
 - Sets the power mode 6 to ECO.
 - Sets the cooking temperature 2 to 140°F (60°C).
 - Sets the cooking time 3 to continuous (--:--).
 - Sets the fan speed ® to 60%.
 - Sets the humidity level (9) to 0%.
 - Turns off the smoker 7 and Delta-T functions, if they have been selected.

NOTE: These functions should remain off during dehydration

- 2. To change the cooking temperature, touch the displayed temperature ②. The touchpad screen displays.
- 3. Use the number keys (11) to enter the cooking temperature, then touch the check mark icon (12).
- 4. To set a cooking time, instead of having the dehydration run continuously, touch the displayed time ③. The touchpad screen displays.
- 5. Use the number keys (11) to enter the cooking time (hh:mm:ss), then touch the check mark icon (12).
 - NOTICE: Changing any of the default settings other than temperature and time is not recommended.
- 6. Load food into the oven.
- 7. Touch the start icon ④. The start icon changes to a red square (stop icon) and the oven begins cooking.

NOTE: If the cooking time is continuous, cooking continues until the stop icon is touched. If the cooking time is set, the controller sounds an alarm and cooking stops when the cooking time has elapsed.

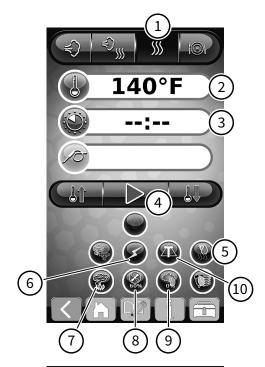

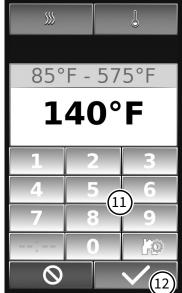



Dehydration Mode Chef Operating Tips



- Place a silpat or other silicon liner on each cooking tray. Do not use liners made of parchment or paper.
- All food items should be well spaced and placed flat on the cooking tray.
- Allow dehydrated food items to cool fully before removing them from the cooking tray.
- Many food items benefit from processing before dehydration. Examples include:
 - Puree vegetables, then dehydrate in an even, thin layer to create papers and powders.
 - Cut fruit into thin slices and dip in a simple syrup prior to dehydration.
 - Mix pureed items prior to dehydration to create new flavor profiles.
 - Pre-cook vegetables such as carrots before pureeing and dehydrating.



Delta-T Core Temperature Cooking Mode

This special program function cooks by internal product temperature with the use of the probe. The Delta-T cooking program increases the oven temperature in direct proportion to the internal temperature of the product, in contrast to the traditionally constant oven temperature. For example, the oven temperature will always be 100°F higher than the product itself. This slow cooking allows more time for enzymes to tenderize the meat. The Delta-T mode can be used with both convection and combination modes, providing a more gentle method of cooking. Browning occurs toward the end of the cooking cycle.



Press On button to power oven on.



Touch the professional cooking mode.



Available in convection mode or combination mode, touch the desired Cooking Mode icon.



Touch the area to the right of the probe icon.

Type in desired final internal product temperature.



Touch the green check mark key to confirm change.

Insert probe into product.



Touch auxiliary function Delta-T icon.

Type in desired Delta-T temperature.



Touch the Start icon to begin cooking.

 The actual internal product temperature will appear next to the probe icon during operation. To change the set value for core temperature, touch the temperature next to the probe icon and make changes as required.



Touch steam Injection at Any Time During Cooking. Steam will inject into the cavity as long as the icon is touched.

When the operator-set internal temperature has been reached, an alarm will sound and handle light will flash several times indicating the end of the operating mode.



Touch the red Stop icon to stop the buzzer or open the oven door.



To stop cooking program at any time, touch the red stop icon

A CAUTION HOT

Use caution when opening the oven door when the cooking chamber is hot to avoid possible burns.

Calibrate the Touch Oven Probe

Fill a pitcher with blended ice and water and place inside the combi oven.

Snap probe in place at top of oven and insert probe into the pitcher of blended ice water.

With the CT PROformance oven "ON", touch the "Utilities" icon on the home page.

Touch the "Settings" icon.

Touch the ">" icon to advance to page 2 of the Settings screen.

Touch the "probe" icon on the Settings screen.

Once the temperature reading has stabilized, adjust setting to 32°F (0°C) using the + or - icons. Touch the "Home" icon to return to the home screen.

The control has now been calibrated to use the probe at appropriate temperatures.



CombiSmoke® Procedures

Loading Wood Chips


- 1. To determine the amount of chips to use, fill the smoker box with dry wood chips. The lid must be able to close.
- Remove the wood chips from the smoker box and place them in a container of clean water. Be sure the wood chips are fully immersed, and soak as instructed by National Fire Protection Agency Standard NFPA-96 or local codes. As of 2017, the NFPA-96 Standard reads 24 hours.
- 3. Shake the excess water off the wood chips and place them back into the smoker box.
- 4. Position the smoker box securely on the two prongs located on the interior side panel of the oven.



DO NOT open the oven door during the smoking function. The introduction of outside air into the oven compartment may cause the wood chips to flame.



When cooking is complete, remove the smoker box from oven. Dispose of wood chips in a fire proof receptacle to prevent the risk of fire.



MARNING

Fire Hazard

The use of improper materials for the smoke function could result in a fire which may lead to personal injury or property damage.

Only use wood chips supplied by Alto-Shaam. Soak one full tray of wood chips in water as instructed by National Fire Protection Agency Standard NFPA-96 or local codes. As of 2017, the NFPA-96 Standard reads 24 hours.

Wood chip	os, bag		
	2.0 lb (.9 kg)	1.25 cu. ft. (35 L)	2.5 cu. ft. (71 L)
Cherry	WC-22540	WC-22541	WC-37746
Apple	WC-22542	WC-22543	WC-37747
Maple	WC-22544	WC-22545	WC-37748
Hickory	WC-2828	WC-2829	WC-37749

Chef Operating Tip

Products such as ribs that require heavier smoke penetration to reach full smoke flavor should remain in the oven after cooking has been completed. Do not open the oven door.

Set the oven in the Low Temperature Steam Mode at 140° to 160°F (60° to 71°C) and allow the product to remain in the oven for a period of one hour.

If you would like assistance, you are invited to contact an Alto-Shaam corporate chef for recommendations.

After using the oven as a smoker, it is necessary to clean the oven in order to prevent a transfer of smoke flavor to non-smoked products. Cleaning instructions are provided in this manual.



CombiSmoke® Procedures

The ability to smoke product, hot or cold, is offered on all CTP models. The smoking function can be engaged in either the Combination mode or the Convection mode of operation. The smoking function cannot be operated when the oven is operating in the steam mode or the retherm mode.



Press on button to power oven on.



Touch the professional cooking mode.



Touch the desired cooking MODE icon, convection or combination.

To Change the Displayed Settings:



Touch the area to the right of the temperature icon.

Type in desired temperature.



Touch the green check mark key to confirm change.

To Cook by Time:



Touch the area to the right of the time icon.

Type in desired time.



Touch the green check mark key to confirm change.

To Activate CombiSmoke:



Touch auxiliary function smoking icon.



Touch the Start icon to begin smoking.

A CAUTION



To prevent **personal injury** or **property damage**:

Always use hand protection when operating this appliance to avoid burns. Metal parts of this equipment become extremely hot when in operation.

Cold Smoking Procedures



Touch convection cooking MODE icon.

To Change The Displayed Settings:



Touch the cold smoking icon.

The temperature will display -----°.

To Cook by Time:



Touch the area to the right of the time icon.

Type in desired time.



Touch the green check mark key to confirm change.

Place a pan of ice on a shelf immediately below the product.



Touch the START icon to begin smoking.

A CAUTION HOT

Use caution when opening the oven door when the cooking chamber is hot to avoid possible burns.



Recipe Programming



1. While on the cooking mode screen, touch the Write a Recipe icon.



- 2. Enter the desired cooking mode, cooking temperature, and cooking time.
- 3. Add any desired special functions. For example:
- If the recipe requires a reminder to open the door at the end of the segment, touch the Door icon.



- If the recipe requires a rest period, touch the Rest icon.
- If the recipe requires rapid remomal of heat, touch the Rapid Cool icon.



4. If the recipe is complete, go to step 6. If the recipe calls for additional segments, touch the Append icon.



 Enter the desired cooking mode, cooking temperature, and cooking time. If required, add a special function—see step 3. Then, touch the Append icon. Repeat for each additional cooking segment.



6. Touch the Save icon when all segments have been written. A touch pad will appear.



7. Choose a photo or input the name of the recipe, then touch the Check Mark icon.




NOTE: Each recipe can have up to 10 segments.



Using Programmed Recipes




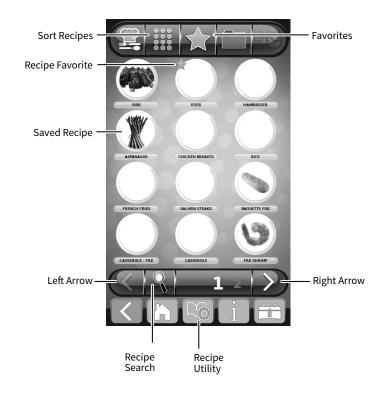

To Cook with Preprogrammed Recipes

- Touch the cookbook with saved recipes icon in the home screen. The recipe screen displays.
- Locate the recipe by doing one of the following:
 - Touch the favorites icon to display favorite recipes.
 - Touch the sort recipes icon to sort recipes, then select frequency, alphabetic order, or last modified date as the sort criteria.
 - Touch the recipe search icon to open the search screen, then use the touch pad keys to enter the recipe name.
 - Touch the left arrow icon or the right arrow icon to navigate between recipe pages.
- · Load food into the oven.
 - NOTE: Some recipes include the preheat function. Make sure the desired preheat temperature has been reached before loading food into the oven.
- Touch the icon for the selected recipe. The oven begins cooking.

NOTE: To stop cooking program at any time, touch the red stop icon .

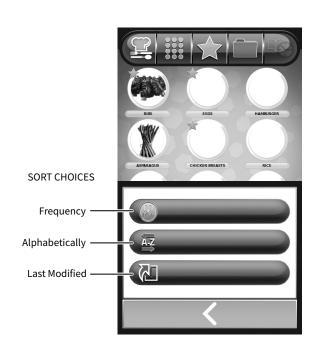



Editing Programmed Recipes

The CT PROformance™ recipes that have been programmed can be edited, saved as a favorite recipe, and organized in folders or by time day they are used to help speed the search for specific recipes.

To Change Saved Recipes:



Touch Recipe Utility icon located at the bottom of the recipe page.

The recipe utility screen is bright red to indicate that the user is now in edit mode.



Touch the edit recipe icon.

Touch the icon of the recipe to be edited.

The first cooking step of the recipe will be displayed. Change cooking mode, temperature, time, probe temperature, and /or any of the auxiliary functions.

If an additional step needs to be added, touch



Append to add next step



Change the previous step



Insert a step



Edit as necessary. When there are no further changes to be made, touch the Save icon.

Enter the name of the recipe if it is to be changed.



Touch the green check mark key to confirm change.

To Delete Saved Recipes:



Touch Recipe Utility icon located at the bottom of the recipe page.


The recipe utility screen is bright red to indicate that the user is now in Edit Mode.




Touch the Delete Recipe icon.

Touch the icon of the recipe to be deleted.

The recipe will be removed from the screen.

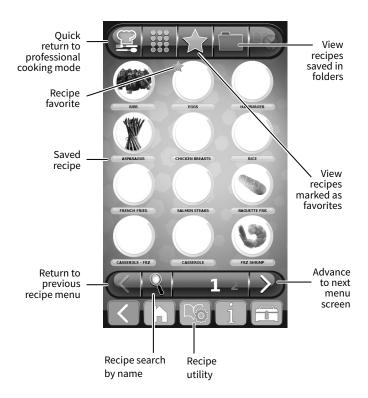

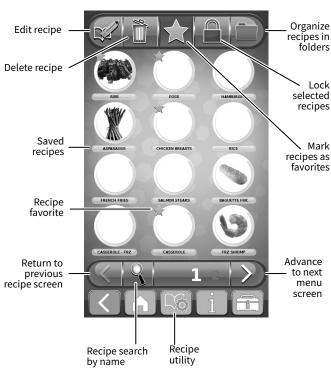

NOTICE: Each recipe can have up to 10 sequential steps.

(continued on next page)



Organizing Programmed Recipes

The CT PROformance™ recipes that have been programmed can be organized in folders to help your kitchen staff be more productive.

To Create A Recipe Folder:



Touch the folder icon located at the top of the recipe page.

The recipe utility screen is bright red to indicate that the user is now in edit mode.



Touch the add folder icon.

The keyboard will appear - allowing you to enter in a name for the recipe folder.



Touch the green check mark to confirm the folder name.

Continue to add recipe folders as necessary.



Touch the recipe utility icon to add programmed recipes to the folder.



Touch the folder icon on the red background.


Touch the named folder icon to reveal the programmed recipe choices available.

Touch each of the programmed recipes to be added to the folder.


A small blue folder will appear on the lower left of the recipe icon, indicating that it has been selected to be added to the recipe folder.




Touch the return to previous screen icon when your choices have been completed.

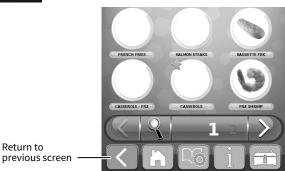



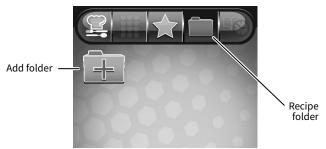

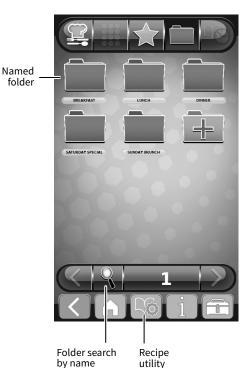



Organizing Programmed Recipes (Continued From Previous Page)

To Mark Saved Recipes as a Favorite:



Touch the Favorites recipe icon.

Touch the icon of the recipe to be marked.

A gold star will appear at the top left of the recipe icon. All favorites can be viewed when you touch the gold star while viewing the list of saved recipes.

To Lock Saved Recipes:




Touch the lock recipe icon.

Touch a single icon of the recipe or a group of icons to be locked.

A red lock will appear at the top right of the recipe icon.



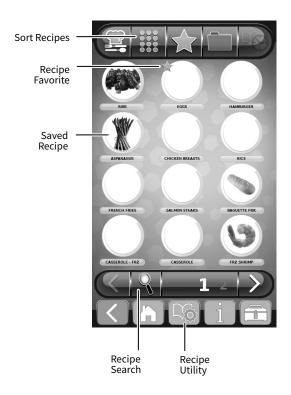



HACCP Access

The Combitherm CT PROformance™ oven meets the requirements of established HACCP criteria by providing automated sampling, record keeping, setpoint validation, recipe used, dates and time. Data is captured when Core Temperature Probe cooking method is chosen. The information can be viewed on screen for verification or troubleshooting. The HACCP preview page will be displayed in LIFO (last in, first out) order. This data is retained indefinitely - until the information is downloaded. Once downloaded, the information is removed from the ovens memory. Best practice would be to download the information every 30 days to a USB drive. This information can then be copied to your computer. The file format is text (.txt).

CAUTION: The Combi Oven USB port is not recommended for use with personal handheld devices.

To Access the Data Collected:



Touch the utilities icon located on the home page.



Touch the upload/download icon.




Touch the HACCP USB icon.

The HACCP screen can help diagnose a problem or error code if limited information is available.

(next steps continued on next page)



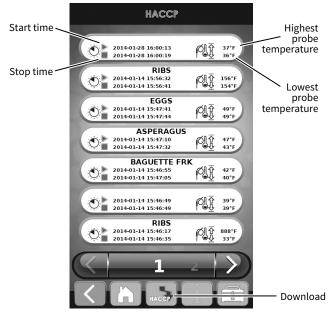



(steps continued from previous page)

HACCP Access And Download


UNIT ID IB CB OB		.DD 0.9← 0.57← Firi 0.06←	mware vers	ions			UNIT ID IB CB OB RECIPE NAME	10:07:66:A5:3	0.9← 0.9← 0.57← Firm 0.06←	ware vers	ions	
	_						DATE	Time	PROGRAM NAME	COOK MODE	CAVITY SETPOINT (°F	COOK TIME (hh:
DATE	Time	PROGRAM NA	ME COOK MODE	E CAVITY SETPO	INT (°F) CO	COOK TIME (hh:mm:ss)	10/31/2013	17:49:14	Preheat	Continuous	212	-:-
10/31/2013	17:49:14	Preheat	Continuous	212	-:	<-	10/31/2013	17:59:27	Steam	Time	212	0:04:00
10/31/2013	17:59:27	Steam	Time	212	0:	1:04:00	10/31/2013	18:00:27	Steam	Time	212	0:04:00
10/31/2013	18:00:27	Steam	Time	212	0:	1:04:00	10/31/2013	18:01:28	Steam	Time	212	0:04:00
10/31/2013	18:01:28	Steam	Time	212	0:	1:04:00		18:02:29	Steam	Time	212	0:04:00
10/31/2013	18:02:29	Steam	Time	212	0:	1:04:00		18:03:29			212	0:04:00
10/31/2013	18:03:29	Steam	Time	212	0:	0:04:00	10/31/2013	18:05:29	Steam	Time	212	0:04:00
							PROBE SETPOINT (°F)	Cavity Temper	ature (°F) Core Tem	perature (°F)	Door Open RECIPES	TEP
ROBE SETPOINT (°	F) Cavity Tempera	ture (°F) Core Te	emperature (°F)	Door Open Ri	ECIPE STEP	ll l		100			0 1	
	100			0 1		ll l		110			0 2	
	110			0 2				110			0 2	
	110			0 2		ll l		110			0 2	
	110			0 2		ll l		110			0 2	
	110 110			0 2		ll l		110			0 2	

To Download the Data Collected:

Pull back the cap of the USB port on the oven.

Insert the USB drive. The USB drive, if recognized, will automatically take the user to the download page. If the USB drive is not recognized by the Combitherm oven, a question mark will appear on screen. Try again with another USB drive or call Alto-Shaam Service.


When the data has made a successful transfer to the USB drive, the screen will change. See below.



Touch the green Check Mark icon to complete the process. Remove the USB drive and close the cap on the USB port on the oven. The download process will automatically create a folder on the USB drive titled "HACCP". Each text file contains cooking program specifics and each function the oven performed.



CombiHood PLUS™ Ventless Hood



The CombiHood PLUS option is factory installed directly on the top of the Alto-Shaam Combitherm CTP or CTC series oven.

- Using EPA method 202 testing, grease laden vapors emitted by the Combi Ventless hood are 0.58 mg/m³ – far less than U.L.'s established standard of 5 mg/m³.
- A high-powered fan moves all steam and vapors from the oven cavity into the hood intake and out the back exhaust vent, trapping grease as the air moves through the filter system.
- As steam and vapors are circulated through the hood, condensed steam drains at the back of the hood.
- An activated charcoal filter cleans the air before venting it out the back of the hood.
- CombiHood PLUS™ performance is "smart"; engaging the fan during the last two minutes of the cook cycle, which provides quiet operation and consumes less power.


To access the filters, swing the outer door up until the hinges latch in place. Then turn the three thumb screws (1) one quarter-turn to release the inner door.

FRONT OF HOOD ALIGNS WITH FRONT OF COMBI DOOR

Condensate Drain

A condensate drain line to the floor drain must be installed. The drain line must always be a positive gradient away from the Combitherm oven.

Test the drain for proper drainage and signs of leaking on a monthly basis.

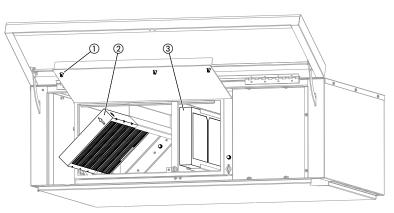

CombiHood Plus Washable Grease Filter with metal housing (5017362) (2)

Washing frequency should be based on oven usage with a maximum of two weeks between cleaning if the oven is used for non-grease laden products or steam applications only. Grease laden products require cleaning frequency of at least once a week.

Remove the grease filter by pulling it straight out of the housing. Place the filter in the dishwasher or wash separately by placing in hot, soapy water until all grease and particles have been removed. Rinse thoroughly. Allow the filter to air dry before reinstalling.

The air flow arrow on the filter casing should point toward the hood fan when the filter is reinstalled.

CombiHood Plus Charcoal Filter with paper housing, Class II (FI-25866) (3)

CombiHood Plus Charcoal Filter with metal housing, Class I required for New York City and Los Angeles (FI-36620)

The charcoal filter should be inspected once a month for contaminants. Replacement must be made at a minimum of three month intervals — more often if heavy contaminants are visible or if the filter no longer controls odors.

To remove the filter, pull and slide out while holding the bottom housing. When replacing the filter, make certain the air flow arrow(s) point toward the hood fan, and that the filter is replaced in the three-sided metal frame provided with the hood.

NOTICE: A pressure switch is used to detect when the airflow through the charcoal filter is reduced by 25% - indicating a possible blockage. This will generate an E101 error message on the oven control display. The filters will need to cleaned or replaced.

If the washable filter is not seated properly, an error code E102 appears on the oven control display during the selftest at the beginning of a cooking cycle or during the last two minutes of a cooking cycle.

When an E101 or E102 appears on the control display, a cook cycle cannot be started until the cause of the fault has been fixed.



How To Use the CombiLatch™ Door Interlock

The Combilatch™ door interlock is typically installed as an add-on to ovens that feature the CombiHood PLUS™ ventless hood. The interlock activates when the door handle is turned, and holds the oven door in a latched, partially open position. The default delay is 20 seconds. This allows the CombiHood to fully capture and remove the steam, fumes and vapors from the oven cavity before the door opens fully.


The Combilatch is installed at the factory. The latch a is located on the bottom of the oven.

NOTE: The delay time can be set to a value lower than 20 seconds during installation.

To open the oven door

- 1. Turn the door handle clockwise a quarter turn. The oven door opens to the latched position.
- 2. Wait until the latch delay is complete. The oven door opens fully.

NOTE: The pull ring b, which is mounted below the right side panel of the oven, can be used to open the oven door before the latch delay is complete.

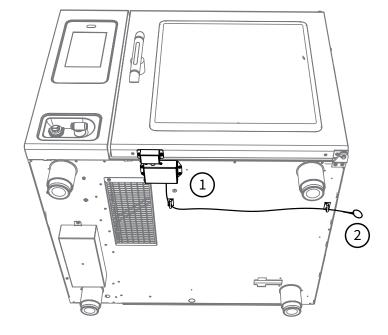



SPECIAL CONDITIONS FOR UNITS INSTALLED WITHIN THE CITY OF NEW YORK

- 1. Installation and start up must be performed by an Alto-Shaam authorized installation company.
- 2. Operating instructions in the manual must be read and understood by all persons using the appliance. The person responsible for training of the operators is responsible for the safekeeping of the manual.
- 3. A ventless hood condensate drain line to the floor drain shall be installed as applicable. The drain line must always be a positive gradient away from the Combitherm.
- 4. The grease filter shall be cleaned at least once a week. The disposable dry-type air filter should be inspected for contaminants on a regular basis. Replacement must be made at a minimum of three month intervals. A hood maintenance log must be included with the unit and shall be completed at the intervals indicated.
- 5. The filter interlocks shall be inspected/tested at least every 6 months.
- 6. Suitable fire protection shall be provided for each installation. This protection system is subject to FDNY Range Hood Inspection Unit's inspection and approval.
- 7. Installation, maintenance, and cleaning procedures shall comply with all applicable New York City Fire Code, New York City Electric Code, Construction Codes (including the Building Code and the Mechanical Code), rules and regulations.
- 8. Underwriters Laboratories, Inc.'s listing requirements and limitations shall be complied with and manufacturer's installation, maintenance procedures and safety limitations shall be complied with.
- 9. The ductless hood and Combitherm unit shall be used for light duty cooking only and the entire ductless hood on a combi oven with grease filter I air filter shall be inspected, cleaned and replaced if necessary, by qualified person holding a Certificate of Fitness type W-64 or F-64. A record of such inspection and cleaning shall be kept on the premises for inspection.
- 10. Certificate of Approval number shall be plainly and permanently labeled upon the appliance.
- 11. All installations shall be subject to inspection by representatives of the Bureau of Fire Prevention which may result in added requirements being imposed.
- 12. The Fire Department reserves the right to make periodic inspections of the above referenced ductless hood on a combi oven without warning to ensure that maintenance requirements are being followed. These audit inspections will be solely at the discretion of the Fire Department.


HOW TO TEST THE FILTER INTERLOCKS

- 1. Start the oven and set the temperature to 500°F.
- 2. Set the timer to three minutes and allow the oven to run for 90 seconds.
- 3. Verify that the hood is operating (Listen for noise from fan.)
- 4. Open the hood door.
- 5 Loosen the three quarter-turn screws on the filter access door and open the filter access door.
- 6. Observe the controller screen. An E101 or E102 error code displays.
- 7. Close the filter access cover.
- 8. Close the hood door.
- 9. Press the checkmark button to clear the error codes.



Connecting the Optional Grease Collection System

- Grease Collection Hose Assembly is attached to the oven in the back.
- The hose guide bracket can be attached on either the left side or the right side toward the back. Placement on the left side is recommended whenever possible. Thumb screws are in position for this purpose. Remove thumb screws, position hose guide bracket and secure screws (photo A). Thread grease hose through the guide.
- The hose hanger bracket can be attached on either the left side or the right side toward the front of the oven. Placement on the left side is recommended whenever possible. Philips screws are in position beneath the oven for this purpose. Remove Philips screws, position hose hanger bracket and secure screws (photo B). The hanger bracket is used to secure the grease collection hose while changing grease collection containers.
- Place Grease Collection Containers inside the tray of the Mobile Grease Collection Cart. Roll into place next to the oven and apply the caster brake.
- Loosen vent cap on container. Pull out the Grease Collection Hose Assembly from the back of the unit. Remove collection container fill cap (photo C).
- Screw Grease Collection Hose Assembly on to collection container until snug.
- Turn ball valve handle to the ON position.
- If this auxiliary function has been chosen while setting your cooking mode, the automatic grease collection system is electronically activated during the cooking process [u.s. patent 8,997,730 b2]. It is designed to save labor and provide greater employee safety by eliminating the need to handle hot grease in shallow pans.
- Grease Collection container has a 5 gallon (19 liter) capacity and holds approximately 3 full loads of poultry grease.
- At a minimum, empty and clean the container when material reaches the fill line on the bottle or at 4 gallons to avoid hot grease overflow.
- Turn the ball valve handle to the OFF position.
- The ball valve handle must be in the OFF position when changing the collection container.
- · Unscrew the container fill cap.
- Using a new container, screw Grease Collection Hose Assembly on to collection container until snug.
- Turn ball valve handle to the ON position.

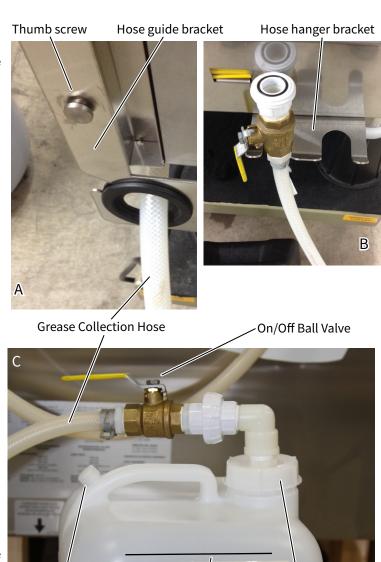

MARNING

Full

Grease

Collection

Container

Plein

To prevent SERIOUS INJURY or PROPERTY DAMAGE:

Lleno

Container

Fill Cap

Recommended

Capacity

ALWAYS apply caster brakes on mobile carts, appliances, or accessories when stationary. Equipment on casters can move or roll on uneven floors.

Check grease collection connections and replace the containers when filled to the recommended capacity.


Vent

Cap



Connecting the Optional Liquid Cleaner

Cleaner Cap and Tubing Assembly

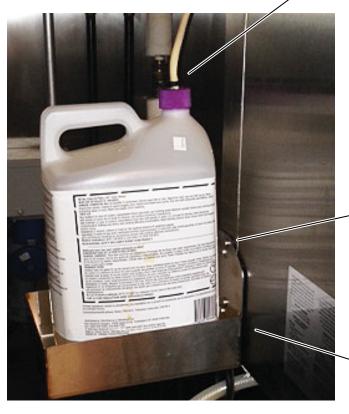

Support Tray Slotted Opening and Mounting Studs

Support Tray

- Removable, cleaner support tray can be mounted on the left or right exterior wall of the oven. Slide slotted openings on the tray over the mounting studs.
- Support tray holds a 2-1/2-gallon (9,5 liter) bottle and measures 10-1/2" x 7-3/4" (267mm x 194mm).
- Place liquid oven cleaner bottle inside tray.
- Wearing protective rubber gloves and eye wear, remove cap from liquid oven cleaner bottle. Pull out the Cleaner Cap and Tubing Assembly from the back of the unit screw on to liquid oven cleaner bottle.
- •• Position cap to ensure the hose is not kinked after tightening.
 - Combitherm liquid oven cleaner jugs are quickly and easily replaced.
 - Combitherm liquid oven cleaner is automatically pumped through the system, saving labor and providing greater employee safety by eliminating the need to handle caustic cleaning liquids each day.

⚠ WARNING

ALWAYS wear protective eye wear and rubber gloves when using liquid oven cleaner to prevent eye, skin, and respiratory tract irritation.

Keep out of reach of children.

See Safety Data Sheet for additional information.

WARNING



To prevent SERIOUS INJURY or DEATH, NEVER operate this appliance in a cleaning mode without the liquid cleaner connected, with a kink in the cleaning hose line, or with an empty liquid cleaner container. Failure to do so may result in poor oven cleaning, grease and/or carbon accumulating inside the oven cavity and increased risk of fire.

⚠ WARNING



To prevent **serious personal injury**, **death**, or **property damage**:

The appliance must be cleaned thoroughly to avoid deposits of grease and or food residues inside the appliance that may catch fire. If fat deposits and/or food waste inside the appliance ignite, shut down the appliance immediately and keep the appliance door closed to extinguish the fire. If further extinguishing is required, disconnect the appliance from the main power and use a fire extinguisher (do not use water to extinguish a grease fire!). Failure to clean the appliance properly invalidates the warranty and relieves Alto-Shaam of all liability.



Bakery Items

RECIPE	STEP		COOKING MODE	COOK TEMP	TIME / PROBE	FAN SPEED	SMOKE	HUMIDITY LEVEL	POWER LEVEL
Bakery (retherm)	ł	275°F (135°C)	€)∭	275°F (135°C)	4 minutes	100%	-1	70%	(
Brownies	ł	325°F (163°C)		325°F (163°C)	25 minutes	8 60%	1	2000	\bigcirc
Cinnamon Rolls	ł	350°F (177°C)	€)∭	350°F (177°C)	6 minutes	8 60%	1		\bigcirc
Cookies (not frozen)	1	325°F (163°C)		325°F (163°C)	12 minutes	8	1	20%	(
Croissants	Step 1	340°F (171°C)	₹)	340°F (171°C)	20 seconds	80%	1	20%	\bigcirc
Croissants	Step 2			340°F (171°C)	11 minutes	80%	1	200	
Danish Pastry	1	340°F (171°C)	₹)	340°F (171°C)	11 minutes	100%	1	50%	
Dinner Rolls	ł	350°F (177°C)	€)	350°F (177°C)	10 minutes	100%	1	70%	
French Bread	ł	350°F (177°C)	€)∭	350°F (177°C)	16 minutes	100%	1	70%	
Fruit Pie		350°F (177°C)		350°F (177°C)	50 minutes	100%		70%	S
Muffins		325°F (163°C)	> >>>	325°F (163°C)	20 minutes	(X) 60%		50%	



Bakery Items (Continued)

RECIPE	STEP		COOKING MODE	COOK TEMP	TIME / PROBE	FAN SPEED	SMOKE	HUMIDITY LEVEL	POWER LEVEL
	Step 1	450°F (232°C)		400°F (204°C)	2 minutes		1	100%	\odot
Par-baked Baguette (Frozen)	Step 2	ł	₩	400°F (204°C)	20 seconds		1	100%	\odot
	Step 3	ł		400°F (204°C)	7 minutes		ł		\bigcirc
Par-baked Bread	1	350°F (177°C)	₩ ₩	350°F (177°C)	10 minutes		1	70%	
Par-baked Rolls	1	350°F (177°C)	₩ ₩	350°F (177°C)	10 minutes		1		\bigcirc
Proofing		ł	$\langle \hat{\gamma} \rangle$	90°F (32°C)	30 minutes		1	70%	\odot
Puff Pastry		375°F (191°C)	₹)	375°F (191°C)	14 minutes			70%	
Sheet Cake		325°F (163°C)	> >>>	325°F (163°C)	20 minutes	8		20%	②



Convenience Product Items

RECIPE	STEP		COOKING MODE	COOK TEMP	TIME / PROBE	FAN SPEED	SMOKE	HUMIDITY LEVEL	POWER LEVEL
Chicken Wings - Thawed		400°F (204°C)	€)∭	400°F (204°C)	10 minutes	100%		80%	
Corn Dogs - Frozen		300°F (149°C)	₹)	300°F (149°C)	9 minutes	100%		100	S I
Egg Rolls		375°F (191°C)	€)∭	375°F (191°C)	15 minutes	100%	1	50%	
Entrée (4 lb frozen)		350°F (177°C)	€)∭	300°F (149°C)	50 minutes	80%	1		
Entrée (4 lb refrigerated)		350°F (177°C)	₹)	350°F (177°C)	Probe 165°F (74°C)	80%		100%	
French Fries - Frozen - 1/2"	Step 1	475°F (246°C)	₹)	375°F (191°C)	1 minute	100%		100%	F I
crinkle cut	Step 2		-555	375°F (191°C)	9 minutes	100%			
Hamburger Patties - Frozen		350°F (177°C)	€)∭	350°F (177°C)	12 minutes	100%	1	80%	
Hamburger Patties - Precooked & Grilled		350°F (177°C)	€)	350°F (177°C)	6 minutes	100%	1	80%	S
Hamburger Patties - Thawed		350°F (177°C)	€)∭	350°F (177°C)	5 minutes	100%		80%	S
Mini Pizza 5"		350°F (177°C)	€)∭	350°F (177°C)	10 minutes	80%		100%	S
Pizza - Fresh		575°F (301°C)	€)	550°F (288°C)	3 minutes 30 seconds	(X) 80%		100%	



Convenience Product Items (Continued)

RECIPE	STEP	Jî	COOKING MODE	COOK TEMP	TIME / PROBE	FAN SPEED	SMOKE	HUMIDITY LEVEL	POWER LEVEL
Spring Rolls - Frozen		350°F (177°C)	₩	350°F (177°C)	15 minutes	100%	1		
Tater Tots		375°F (191°C)	₹)	375°F (191°C)	10 minutes	(X) 60%		50%	

Fish & Seafood Items

RECIPE	STEP		COOKING MODE	COOK TEMP	TIME / PROBE	FAN SPEED	SMOKE	HUMIDITY LEVEL	POWER LEVEL
Baked Fish - Fresh		575°F (301°C)	€)∭	550°F (288°C)	4 minutes	100%	-1	100%	
Lobster - Whole		135°F (57°C)	\neq	195°F (91°C)	13 minutes	60%		100%	②
Salmon - Cold	Step 1				15 minutes	20%		100%	
Smoked	Rest		STANDBY		30 minutes	OFF	OFF		OFF
Salmon Filets		105°F (41°C)	$\widehat{\Rightarrow}$	145°F (63°C)	7 minutes		1	100%	\bigcirc
Salmon Steaks		105°F (41°C)	\Rightarrow	145°F (63°C)	8 minutes	100%	1	100%	\bigcirc
Cold Smoked Shrimp - Pre-cooked					10 minutes	(X) 20%		100%	
Shrimp - Frozen		118°F (48°C)	\Rightarrow	158°F (70°C)	12 minutes	8		100%	



Meat Recipes

RECIPE	STEP		COOKING MODE	COOK TEMP	TIME / PROBE	FAN SPEED	SMOKE	HUMIDITY LEVEL	POWER LEVEL
Bacon		318°F (159°C)	₩	318°F (159°C)	15 minutes	80%		700	
Beef Brisket - Smoked		250°F (121°C)	€)∭	250°F (121°C)	Probe 180°F (82°C)	20%		100%	X)
Beef - Roasted (Prime Rib, Top Round, Tri-Tips, etc)			Combi Delta-T	125°F (52°C)	Probe 125°F (52°C)	60%			
Breakfast Sausage Links		350°F (177°C)	₩	350°F (177°C)	8 minutes	80%			
Ham by Core Temp			Combi Delta-T	125°F (52°C)	Probe 150°F (66°C)	8 60%	1		
Leg of Lamb by Core Temp			Combi Delta-T	125°F (52°C)	Probe 130°F (54°C)	8 60%	1		\bigcirc
Meat Loaf by Core Temp		275°F (135°C)	₩	275°F (135°C)	Probe 155°F (68°C)	8	ł	70%	\odot
Pork - Back Ribs - Raw		250°F (121°C)	₹)	250°F (121°C)	1 hour 15 minutes	(X) 60%		100%	\odot
Pork - Back	Step 1	250°F (121°C)	€)	250°F (121°C)	1 hour 15 minutes	(X) 20%		100%	
Ribs - Smoked	Step 2		\Rightarrow	160°F (71°C)	Continuous	(X) 60%	OFF	100%	S
Pork - Loin - by Core Temp		300°F (149°C)	€)	300°F (149°C)	Probe 150°F (66°C)	(X) 60%		90%	9



Meat Recipes (Continued)

RECIPE	STEP		COOKING MODE	COOK TEMP	TIME / PROBE	FAN SPEED	SMOKE	HUMIDITY LEVEL	POWER LEVEL
Pork Ribs Reheat		400°F (204°C)	€)∭	400°F (204°C)	7 minutes	(X) 80%		100%	
Pork Shoulder	Step 1	225°F (107°C)	€)	225°F (107°C)	90 minutes	(X) 20%		100%	A
- Smoked	Step 2		€)∭	225°F (107°C)	Probe 180°F (82°C)	60%	OFF	100%	
Rack of Lamb - by Core Temp	ŀ		Combi Delta-T	122°F (50°C)	Probe 130°F (54°C)	60%		90%	S
Sausage - Fresh	ŀ	120°F (49°C)	$\langle \psi \rangle$	160°F (71°C)	15 minutes	8 60%	1		



Miscellaneous Recipes

RECIPE	STEP		COOKING MODE	COOK TEMP	TIME / PROBE	FAN SPEED	SMOKE	HUMIDITY LEVEL	POWER LEVEL
Crème Brûlée		190°F (88°C)	\Rightarrow	190°F (88°C)	55 minutes	8 60%		100%	
Eggs - Hardboiled		212°F (100°C)	\Rightarrow	212°F (100°C)	12 minutes	100%	1	100%	
Eggs - Poached in Poaching Pan		130°F (54°C)	\Rightarrow	170°F (77°C)	10 minutes	8 60%		100%	
Eggs - Scrambled in bag: shake at 18 minutes	1-	212°F (100°C)	\Rightarrow	212°F (100°C)	25 minutes	100%	ŀ	1000	
Eggs - Scrambled in pan	1	212°F (100°C)	$\widehat{\mathbb{A}}$	212°F (100°C)	15 minutes		ŀ	100%	
Eggs - Sous Vide	1		$\widehat{\mathbb{Y}}$	148°F (64°C)	60 minutes		ŀ	100%	
Pasta - Linguine or Spaghetti	1	212°F (100°C)	$\langle \psi \rangle$	212°F (100°C)	20 minutes	(X)	ł		
Rice		212°F (100°C)	\Rightarrow	212°F (100°C)	23 minutes	(X)	-	100%	Si)
Tamales		212°F (100°C)	\Rightarrow	212°F (100°C)	30 minutes	(8)		100	S



Poultry Recipes

RECIPE	STEP		COOKING MODE	COOK TEMP	TIME / PROBE	FAN SPEED	SMOKE	HUMIDITY LEVEL	POWER LEVEL
Chicken -	Step 1	350°F (177°C)	€)	350°F (177°C)	4 minutes	80%		100%	S
Patties	Step 2		<i></i>	350°F (177°C)	5 minutes	80%			A
Chicken - Pieces		350°F (177°C)	€)∭	350°F (177°C)	35 minutes	00%		80%	
Chicken - Oven Fried Pieces		450°F (232°C)	€)∭	450°F (232°C)	18 minutes	100%	-1	100%	
Chicken Pieces - MRB		350°F (177°C)	€)∭	350°F (177°C)	28 minutes	100%		100%	
Chicken - Whole Roasted (full load)		575°F (301°C)	€)∭	400°F (204°C)	Probe 175°F (79°C)	80%		50%	S
Chicken - Whole Roasted (half load)		400°F (204°C)	€)∭	400°F (204°C)	Probe 175°F (79°C)	80%		50%	SI)
Chicken -	Step 1			34°F (1°C)	15 minutes	(X) 20%		100%	Ø
Whole Smoked	Step 2		€)∭	400°F (204°C)	Probe 175°F (79°C)	80%	OFF	(3) 100°	
	Step 1	250°F (121°C)	€)	250°F (121°C)	15 minutes	60%		100%	9
Duck Whole - by Core Temp	Step 2		€)	300°F (149°C)	10 minutes	8		100%	9
	Step 3		€)∭	300°F (149°C)	Probe 175°F (79°C)	60%		100%	8



Poultry Recipes (Continued)

RECIPE	STEP		COOKING MODE	COOK TEMP	TIME / PROBE	FAN SPEED	SMOKE	HUMIDITY LEVEL	POWER LEVEL
Grilled Chicken Breasts		575°F (301°C)	€)∭	465°F (240°C)	4 minutes	100%		100%	
Turkov Broast	Step 1	350°F (177°C)		250 - 350°F (135 - 177°C)	5 minutes	60%	1	100	S
Turkey Breast	Step 2		€)∭	250 - 350°F (135 - 177°C)	Probe 165°F (74°C)	60%	1	20%	\bigcirc
Turkey Breast	Step 1	275°F (135°C)	€)∭	275°F (135°C)	60 minutes	(X) 20%		100%	
- Smoked	Step 2		€)	275°F (135°C)	Probe 155°F (68°C)	(X) 60%	OFF		S



Vegetable Recipes

RECIPE	STEP		COOKING MODE	COOK TEMP	TIME / PROBE	FAN SPEED	SMOKE	HUMIDITY LEVEL	POWER LEVEL
Asparagus - Fresh	1	150°F (66°C)	$\langle \psi \rangle$	190°F (88°C)	3 minutes		1		3
Asparagus - Roasted	-1	575°F (301°C)	€)∭	575°F (301°C)	5 minutes	100%		50%	
Broccoli, Cauliflower, Squash, Zucchini - Fresh		212°F (100°C)	\Rightarrow	212°F (100°C)	3 - 6 minutes		ł	100%	
Cabbage, Green Beans, - Fresh		212°F (100°C)	\Rightarrow	212°F (100°C)	8 -10 minutes	(X)	-		
Carrots - Fresh	1	225°F (107°C)		225°F (107°C)	10 minutes	(X)	1		
Cauliflower -	Step 1	575°F (301°C)		475°F (246°C)	4 minutes	(S)			
Roasted	Step 2	1	€)∭	430°F (221°C)	5 minutes	(X)	ł		
Corn-on-the- Cob - Fresh	-1	212°F (100°C)	\Rightarrow	212°F (100°C)	14 minutes	100%		100%	
Frozen Vegetables		300°F (149°C)	€)∭	220°F (104°C)	8 minutes	100%		100%	
Mushrooms - button - roasted	Toss with oil - place on sheet pan	575°F (301°C)	€)∭	550°F (288°C)	10 minutes	(X)		10%	



Vegetable Recipes (Continued)

RECIPE	STEP		COOKING MODE	COOK TEMP	TIME / PROBE	FAN SPEED	SMOKE	HUMIDITY LEVEL	POWER LEVEL
Potatoes, for mashed		225°F (107°C)	\Rightarrow	225°F (107°C)	30 minutes	100%		100%	
Potatoes, Red or Salad		212°F (100°C)		212°F (100°C)	30 minutes	100%		100%	
Potatoes, Roasted		500°F (260°C)	€)∭	450°F (232°C)	18 minutes	00%		20%	



CombiClean® Cleaning Agents



ALWAYS wear rubber gloves when using CombiClean tablets or spray oven cleaner.

DANGER

ALWAYS wear protective eye wear when using spray oven cleaner.

Danger

- May be harmful if swallowed.
- May be harmful in contact with skin. Always wear rubber gloves when handling.
- Causes severe skin burns and eye damage.
- Tablet will begin to dissolve onto skin if handled with damp or wet hands.
- May cause respiratory irritation. May cause drowsiness or dizziness.
- Harmful to aquatic life with long lasting effects. Do not mix with anything but water.
- Do not breathe dust/fumes/gas/mist/vapors/spray. Wash face, hands and any exposed skin thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.
- Use only outdoors or in a well-ventilated area. Avoid release to the environment. Store in a locked and well ventilated place. Keep container tightly closed. Dispose of contents/container to an approved waste disposal plant.

First Aid

Immediately call a POISON CENTER or doctor/physician. Specific treatment (See section 4 on the SDS).

- IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor/physician.
- IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower. Wash contaminated clothing before reuse.
- IF INHALED: Move victim to fresh air and keep at rest in a position comfortable for breathing. Immediately call a POISON CENTER or doctor/physician if you feel unwell.
- IF SWALLOWED: Rinse mouth. DO NOT induce vomiting. Drink 2-3 glasses of water or milk. Immediately call a POISON CENTER or doctor/physician.



Preventative Maintenance

In addition to the routine cleaning and maintenance procedures, there are several additional steps to be taken for both sanitation and to keep the oven running efficiently. Refer to the following inspection checklists for a comprehensive approach to longevity and equipment efficiency. These additional safeguards will help prevent down time and costly repairs.

Do not dispose of grease, fat, wood chips or solid waste down the oven drain.

Fats and solids will eventually coagulate in the drain system, causing blockage. Consequently, water will back-up into the condenser and interior oven compartment, resulting in an oven that is inoperable.


Make certain the drain screen is always in place. Remove any solid waste material from the oven bottom and drain screen before it enters the drain system.

The routine removal of solids from the drain screen will help prevent blockage.

Use the authorized combitherm oven cleaner only.

The use of unauthorized cleaning agents may discolor or harm the interior surfaces of the oven.

WARNING



To prolong the life of the door gasket, clean this item daily.

The acids and related compounds found in fat, particularly chicken fat, will weaken the composition of the gasket unless cleaned on a daily basis. Wipe with a hot, soapy cloth.

To additionally protect gasket life, allow oven door to remain slightly open at the end of the production day.

An open door will relieve the pressure on the door gasket.

Routinely clean door hinges.

Open oven door to relieve tension. Clean all parts of the hinge.

On a monthly basis, decalcify or descale the oven.

Using the Scale Free cleaner, CE-27889, place 7 ounces of the product in the drain. Run a heavy-duty cleaning cycle. After the cleaning cycle has been completed, use the hand shower to spray down the oven interior. Swing open the interior fan guard and spray down the area behind the panel. Direct a stream of water down the interior drain cover to thoroughly rinse the cleaner out of the oven. After the oven interior has been sprayed down, run a rinse cleaning cycle.



MARNING



To prevent serious personal injury, death, or property damage:

Do not steam clean, hose down or flood the interior or exterior with water or liquid solution of any kind. **Do not** use water jet to clean. Failure to observe this precaution will void the warranty.



Weekly Maintenance

On a weekly basis, the heat exchanger on gas models and convection elements on electric models must be inspected.

- Remove all wire shelves from inside the appliance.
- · Remove left side rack from the oven cavity.
- Flip the tabs or loosen the thumb screws on the fan panel to the open position and swing the fan guard cover plate toward the back of the oven.
- Inspect the heat exchanger on gas models for signs of grease and/or carbon buildup, scale buildup, and any signs of major deformation. Refer to images A and B.
- Inspect that the flue pipe seal is tight and intact. Refer to image C.
- Inspect the convection elements for signs of cracking, grease and/or carbon buildup, scale buildup, and any signs of major deformation. Refer to image D.







D





Daily Inspection							
Unit Information							
Business Name:			Seria	al Number:			
Model Number:		Daily	Inspection	Start Date:			
Daily Inspection Checklist							
	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Sunday
Inspect and clean:			<u> </u>				
Product probe (thermometer)							
Door gasket (inner door seal)							
Inner door glass							
Front drip tray							
Screen and overlay (inspect for cracks, peeling, moisture, etc.)							
Execute automatic wash cycle (with approved cleaning chemical ONLY)							
Employee initials							
Component Malfunction and Replacement							
List details of the failure(s) next to the day they occ	curred. Leave b	lank if comp	onents are wo	orking proper	ly.		
Monday							
Tuesday							
Wednesday							
Thursday							
Friday							
Saturday							
Sunday							

Week 4



Weekly Inspection Unit Information Business Name: Serial Number: Weekly Inspection Start Date: Model Number: **Weekly Inspection Checklist** Inspect - Oven cavity lamp Inspect - Oven cavity for signs of grease/carbon buildup Inspect - Loosen thumb screws to inspect behind the fan panel inside the oven cavity for signs of grease/carbon buildup Inspect - Loosen thumb screws to inspect behind the fan panel inside the oven cavity for signs of scale buildup Inspect - The heat exchanger for any signs of major deformation. If yes, immediately remove from service and take corrective action steps. Inspect - The heat exchanger for any loose/disconnected pipes or flanges. If yes, immediately remove from service and take corrective action steps. E Inspect - Convection elements for signs of cracking, deformation, or damage Clean ventless hood grease filters **Employee initials E** Electric units only G Gas units only **Component Malfunction and Replacement** List details of the failure(s) next to the day they occurred. Leave blank if components are working properly. Week 1 Week 2 Week 3



Monthly Inspection Unit Information Business Name: Serial Number: Model Number: Monthly Inspection Start Date: **Monthly Inspection Checklist** Inspect/Test - Proper draining of the oven cavity Inspect - All drain lines for leaks or clogs **EB** Descale the steam generator Inspect - Oven cavity for any signs of scale buildup Descale the oven interior Inspect ventless hood paper filter (replace as needed) Test ventless hood drain for proper drainage and signs of leaking **Employee initials EB** Electric boiler units only **Component Malfunction & Replacement** Summarize any component failure(s) that may have occurred during this month.

EB Electric boiler units only



Yearly Inspection

Unit Information				
Business Name:	Serial Number:			
Model Number: 12-Month Inspection Start Date:				
12-Month Inspection Checklist				
Replace - Steam bypass hose				
Inspect - Cleaning pump hose				
Inspect/Test - Proper draining of the oven cavity				
Inspect - All drain lines for leaks or clogs				
Inspect - All solenoid hoses (both ends)				
Inspect - Upper browning valve hose				
Inspect - Low pressure relief valve & hose				
E Inspect - Convection element seal (from the electrical co	ompartment)			
G Inspect - Gas heat exchanger seal (from the electrical co	mpartment)			
Inspect - N6 oven temperature probe seal				
EB Descale the steam generator				
EB Remove & Inspect - Steam generator elements				
Inspect - Hand shower hose				
Inspect - Hand shower handle				
nspect - Product probe				
nspect - Water injection tube				
nspect - Oven cavity for any signs of scale buildup				
nspect - Oven cavity lamp				
nspect - Oven cavity for signs of grease/carbon buildup				
nspect - Behind the fan panel inside the oven cavity for signs of grease/carbon buildup				
nspect - Behind the fan panel inside the oven cavity for signs of scale buildup				

G Gas units only E Electric units only



Unit information		
Business Name:	Serial Number:	
Model Number:	12-Month Inspection Start Date:	
12-Month Inspection Checklist		
Inspect - The heat exchanger for any signs of major deformati action steps.	ion. If yes, immediately remove from service and take corrective	
Inspect - The heat exchanger for any loose/disconnected pipe corrective action steps.	es or flanges. If yes, immediately remove from service and take	
Inspect and Ensure - Exhaust pipes are exiting the oven cavity		
G Inspect - Heat exchanger flange gasket (replace as needed)		
G Inspect and Tighten - Heat exchanger flange bolts		
G Inspect and Tighten - Heat exchanger burner flange hardware	∙ & gasket (replace as needed)	
G Inspect and Tighten - Heat exchanger igniter flange hardware	& gasket (replace as needed)	
G Inspect - Heat exchanger exhaust pipes (ensure they are exiting	ng out past the oven cavity ceiling flange) - ESG models only	
G Inspect - Oven cavity ceiling flange & flange gasket - ESG mod	els only	
G Tighten - Burner flange bolts		
G Tighten - Igniter flange bolts		
Inspect - Heat exchanger weep holes to ensure they are free of obsfrom service and replace the heat exchanger) - Not applicable to C		
E Inspect - Convection elements for signs of cracking, deformat	ion, or damage	
Replace - Oven lamp cover(s) & gasket(s)		
Descale the oven interior		
Inspect - Upper and lower door hinges and pins		
Inspect - Door gasket (replace as needed)		
Inspect - Door upper and lower hinges (replace as needed)		
Wipe the inner door glass		
Inspect - Front drip tray (clean as needed)		
Inspect - Front drip tray hose		
Inspect - Control overlay		
Inspect and Tighten - All electrical connections		
Inspect and Tighten - All cooling fans for proper operation		
EB Electric boiler units only G Gas units only E Electric boiler units only	ectric units only	




Unit Information					
Business Name:	Serial Number:				
Model Number:	12-Month Inspection Start Date:				
12-Month Inspection Checklist					
Inspect and Tighten - Door hinges and lower hinge pin bolt					
Inspect and Tighten - Door handle					
If there is a smoker, inspect the smoke element for visual signs of de	eformation, cracks or breaks (replace as needed)				
Review - Error code history					
Note the software version (update if not current)					
Record - Water pressure (static & dynamic)					
Record - Line voltage across all lines					
Record - Line voltage to ground on each line					
Record - Amperage across all three legs (when heating)					
Function test all components (list components)					
For ovens shipped to New Zealand or Australia, inspect the backflow preventer check valve per AS/NZ3500.1 and AS/NZ3500.2					
Component Failure and Replacement					
Summarize any component failure(s) that may have occurred durin	g this month.				
Customer Signature:					
Technician Signature:					




Sweep Gasket Installation (10-10 or 10-20 models only)


1. Position the sweep gasket as shown in the illustration below, noting the position of the top groove ①, door side ②, and bottom groove ③.

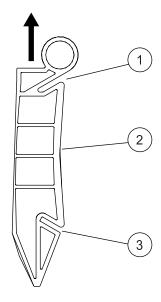


2. Grasp the sweep gasket with your right hand, and open the bottom groove with your index finger.

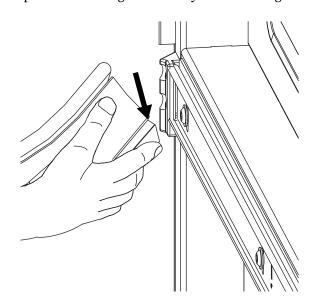

3. Starting at the left end, press the bottom groove of the sweep gasket over the bottom lip of the gasket retention channel.

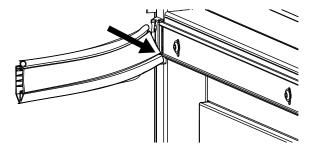


4.Bend the sweep gasket to open up the bottom groove. Continue to press the bottom groove over the bottom lip of the gasket retention channel.

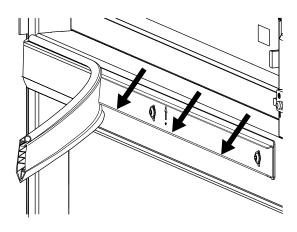




Sweep Gasket Installation (10-10 or 10-20 models only) Continued from previous page


5. Press the top groove of the sweep gasket onto the top lip of the gasket retention channel.

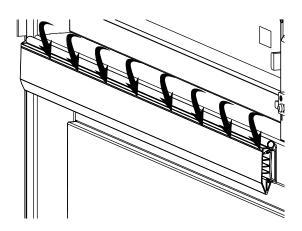


6. Insert the retention strap into the sweep gasket, and push it all the way through until fully seated.

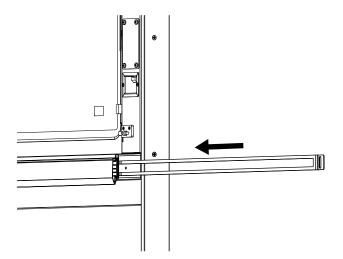

7. Push the ends of the retention strap into the block.



8.Install the retaining strap screw to secure the retaining strap in place.

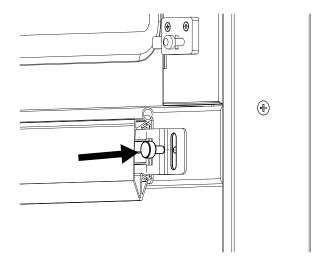



Protecting Stainless Steel Surfaces



It is important to guard against corrosion in the care of stainless steel surfaces. Harsh, corrosive, or inappropriate chemicals can completely destroy the protective surface layer of stainless steel. Abrasive pads,

steel wool, or metal implements will abrade surfaces causing damage to this protective coating and will eventually result in areas of corrosion. Even water, particularly hard water that contains high to moderate concentrations of chloride, will cause oxidation and pitting that result in rust and corrosion. In addition, many acidic foods spilled and left to remain on metal surfaces are contributing factors that will corrode surfaces.

Proper cleaning agents, materials, and methods are vital to maintaining the appearance and life of this appliance. Spilled foods should be removed and the area wiped as soon as possible but at the very least, a minimum of once per day. Always thoroughly rinse surfaces after using a cleaning agent and wipe standing water as quickly as possible after rinsing.

Cleaning Agents

Use non-abrasive cleaning products designed for use on stainless steel surfaces. Cleaning agents must be chloride-free compounds and must not contain quaternary salts. Never use hydrochloric acid (muriatic acid) on stainless steel surfaces. Failure to observe this precaution will void the warranty. Always use the proper cleaning agent at the manufacturer's recommended strength. Contact your local cleaning supplier for product recommendations.

Cleaning Materials

Cleaning can usually be accomplished with the proper cleaning agent and a soft, clean cloth. When more aggressive methods are needed, use a non-abrasive scouring pad on difficult areas and make certain to scrub with the visible grain of surface metal to avoid surface scratches. Never use wire brushes, metal scouring pads, or scrapers to remove food residue. Failure to observe this precaution will void the warranty.

NOTICE



To protect stainless steel surfaces, completely avoid the use of abrasive cleaning compounds, chloride based cleaners, or cleaners containing quaternary salts. **Never** use hydrochloric acid (muriatic acid) on stainless steel. **Never** use wire brushes, metal scouring pads or scrapers.



↑ WARNING



To prevent serious personal injury, death, or property damage:

The appliance must be cleaned thoroughly to avoid deposits of grease and or food residues inside the appliance that may catch fire. If fat deposits and/or food waste inside the appliance ignite, shut down the appliance immediately and keep the appliance door closed to extinguish the fire. If further extinguishing is required, disconnect the appliance from the main power and use a fire extinguisher (do not use water to extinguish a grease fire!). Failure to clean the appliance properly invalidates the warranty and relieves Alto-Shaam of all liability.



MARNING




To prevent serious personal injury, death, or property damage:

Do not steam clean, hose down or flood the interior or exterior with water or liquid solution of any kind. **Do not** use water jet to clean. Failure to observe this precaution will void the warranty.

Daily Cleaning of the Oven

Cleaning is to be performed at the end of the production day or between production shifts.

- 1. Allow the oven to cool.
- 2. Remove the optional grill grate from the oven interior and wash separately in hot, soapy water to preserve the special non-stick coating.
- 3. Release the hinged inner glass on the CoolTouch3™ triple pane window door. Clean both sides of each pane of glass with a window cleaner or vinegar.
- 4. Wipe the control panel and door handle thoroughly.
- 5. Use the optional Drip Tray
 Clean-out Brush [5021126] to
 remove grease and food debris
 from the drip tray drain line.
 Insert brush first, and push into
 the drip tray drain opening until
 6" (152mm) or less remains of the
 wire handle. Remove the brush
 and repeat as necessary.



- 6. Clean the door gasket. Wipe the gasket and crevices with a clean cloth soaked in non-abrasive cleaning agent. Wipe again with a cloth and clean rinse water. Certain conditions will accelerate the wear of the door seal and routine cleaning will prolong the life of the door gasket:
 - continuous operation at high cooking temperatures
 - use of low humidity levels
 - production with predominantly high-fat foods

Do not attempt to remove the gasket or place in the dishwasher.

7. To help maintain the protective film coating on polished stainless steel, clean the exterior of the appliance with a cleaner recommended for stainless steel surfaces. Spray the cleaning agent on a clean lintfree cloth and wipe with the grain of the stainless steel.

Probe and Probe Prong Cleaning

- Remove all food debris from the probe between loads and at the end of each production shift. Wipe the entire probe, probe cable assembly, probe prongs, and probe holding bracket with a clean cloth and warm detergent solution.
- 2. Remove detergent by wiping the probe, cable, probe prongs, and bracket with a cloth and clean rinse water.
- 3. Wipe the probe and probe bracket with a disposable alcohol pad or sanitizing solution recommended for food contact surfaces.
- 4. Allow the probe, probe prongs, and cable to air dry in the probe holding bracket.
- 5. Wipe the probe with a disposable alcohol pad prior to inserting into a new food product.

Roll-In Cart/Food Trolley Cleaning

- 1. Move the food trolley to a cart wash area. Clean the food trolley with a mild, non-abrasive cleaning detergent and warm water.
- 2. Hand wipe all framing, slides, drip pan, and base. Thoroughly clean debris from the casters. A spray hose can be used to clean the food trolley.
- 3. Remove detergent solution with warm water.
- 4. Wipe or spray with a sanitizing solution designed for use on metal and vinyl food contact surfaces.
- 5. Allow the food trolley to air dry.

As an alternative, food trolleys can be cleaned while inside the oven. Allow the trolley to remain in the oven through the heavy-duty cleaning cycle, followed by steps 2 through 5.

Monthly Cleaning

- · spray head
- · water intake filters
- · drain pipe
- decalcify (descale) oven



CT PROtouch™ with CombiClean®

Five (5) cleaning levels are offered: rinse (20 minutes), light (30 minutes), normal (1 hour 20 minutes), heavy-duty (2 hours 6 minutes), and heavy-duty PLUS (3 hours 30 minutes) cleaning. CombiClean® 18 gram CombiTabs™ (CE-36354) or Combitherm® liquid spray cleaner (CE-24750) may be used. Side racks and shelves may remain inside oven during cleaning. Remove the optional Grill Grate from the oven interior and wash separately in hot, soapy water to preserve the special non-stick coating. Remove the smoker tray and any solid wastes from the drain screen and oven interior to prevent blockage.

NOTICE: If a power outage were to occur during any of the cleaning cycles, the oven will begin a six (6) minute forced-rinse cycle.

Be sure the water is turned on.



Touch the Cleaning icon found on the home screen.

If oven is too hot to proceed, the **Oven Too Hot** warning screen will appear. Open the oven door to allow the oven to cool below 150°F (66°C). When the oven is finished cooling, begin the cleaning procedure again.



Rinse









nt Normal Heavy-duty Heavy-duty PLUS


Select Rinse, Light, Normal, Heavy-duty, or Heavy-duty PLUS cleaning level.

- Wear rubber gloves to remove oven interior drain cover screen.
- Tear open or cut open the plastic wrap surrounding the cleaning tablets.
- Remove tablets from the packaging. Discard packaging. Insert the appropriate number of CombiClean®
 CombiTabs™ directly into the oven cavity drain or spray CombiClean liquid cleaner inside the oven.
- The number of tablets to be used can be increased depending upon how dirty the interior is.
- · Close oven door.



Touch the green check mark key to begin the cleaning cycle.

Oven shuts down when the cleaning cycle is complete. Leave door slightly ajar when finished.

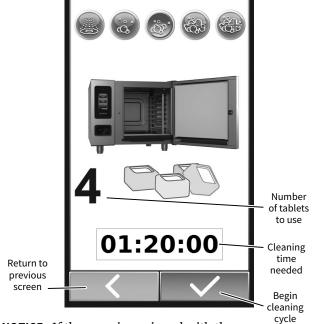


NOTICE: If the oven is equipped with the optional grease collection system, 3 cleaning levels are available.

Wear rubber gloves









NOTICE: All tablets should be placed inside the drain as best as possible and drain screen re-installed before starting the cleaning cycle. Tablets placed on top of the drain cover or placed on the bottom of the oven will not dissolve properly and will cause the oven interior to deteriorate.



CT PROtouch™ with Automatic Liquid Cleaning

There are five (5) cleaning levels for liquid cleaning.

- Rinse (20 minutes)
- Light (30 minutes)
- Normal (1 hour 20 minutes)
- · Heavy-duty (2 hours 6 minutes)
- · Heavy-duty PLUS (3 hours 30 minutes)

Use liquid cleaning solution (CE-36457) or Combitherm® liquid spray cleaner (CE-24750).

Side racks and shelves can remain inside the oven.

NOTICE: If a power outage happens during a cleaning cycle, the oven will begin a six (6) minute forced-rinse cycle the next time it starts.

NOTICE: Make sure the water is turned on and that enough liquid cleaner is available for the cleaning cycle.

Steps

- 1. Remove the optional grill grate from the oven interior and wash separately in hot, soapy water to preserve the special non-stick coating.
- 2. Remove the smoker tray
- Remove all solid waste from the drain screen and oven interior.
- 4. Touch the cleaning icon on the home screen. The cleaning screen a displays.

If the cavity temperature is above 150°F (66°C), the Oven Too Hot warning displays. Open the door and allow the oven to cool before selecting a cleaning level.

5. Make sure the liquid cleaner container is filled.









Heavy-duty



Rinse

Light

Normal


Heavy-duty PLUS

- 6. Select a cleaning level.
- 7. Touch the green check mark icon

 The oven shuts down when the cleaning cycle is complete.

 Leave the door open when the cleaning cycle is complete to speed drying.



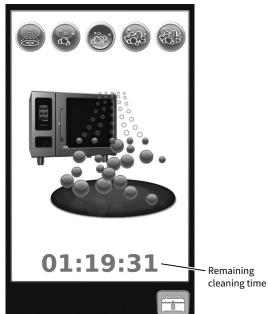



ALWAYS check the circuit breaker is turned "ON" and your unit is receiving power BEFORE calling your Authorized Alto-Shaam Service Agent.

NOTICE

This section is provided for the assistance of qualified and trained service technicians only and is not intended for use by untrained or unauthorized service personnel. Do not attempt to repair or service the oven beyond this point. Contact Alto-Shaam for the nearest authorized service agent. Repairs made by any other service agents without prior authorization by Alto-Shaam will void the warranty.

When the oven malfunctions, an error code will appear in the display.



Press the Start icon to acknowledge the error.

When the oven error notification has been acknowledged, the Combitherm will attempt to return to normal operation.

Error Code	Error Call Out in Display	Description of Error	Possible Cause(s)
E01	Low Water Boiler	Upper water level probe B1 is not satisfied within 5 minutes, after water solenoid valve Y1 is activated.	 Water supply is shut off. Low water pressure. Boiler drain cap is missing. Boiler drain pump is defective. Drain pump elbow leaking. Water level probe has calcium build up. Double water solenoid valve is defective (Y1). Relay board, high voltage is defective.
E02	Control Temperature High	Low voltage relay board temperature higher than 176°F (80°C).	 Check wiring to all components listed below. Cooling fan on relay board assembly is defective. Cooling fan on display board assembly is defective. Main cooling fan is defective. Cooling fan on motor drive is defective.
E03	Fan Motor Error	Fan motor does not spin after 60 seconds, detected by the Hall Sensor. Error 03 does not appear if error E53 is detected first.	 Check wiring to all components listed below. If LED on motor control flashes, see error codes for motor control. Motor or fan wheel locked. Hall sensor does not detect motor rotation. Motor Thermo Temperature protection. Fan wheel damaged.
E04	Lower Fan Motor Error	Lower Fan motor does not spin after 60 seconds, detected by the Hall Sensor. Error 04 does not appear if error E54 is detected first.	 Check wiring to all components mentioned below. If LED on motor control flashes, see error codes for motor control. Motor or fan wheel locked. Hall sensor does not detect motor rotation. Motor Thermo Temperature protection. Fan wheel damaged.
E05	VFD Comm Failure	When VFD does not respond to a query on the CAN interface.	 Loss of power to VFD. VFD malfunction. CAN cable disconnected. CAN address not correct on VFD.



Error Call Out in Display	Description of Error	Possible Cause(s)
Lower VFD Comm Failure	When VFD does not respond to a query on the CAN interface.	 Loss of power to VFD. VFD malfunction. CAN cable disconnected. CAN address not correct on VFD.
Error Received from VFD	When VFD is flashing the green light	Refer to VFD error code list and match to number of blinks on the green LED of VFD.
Error Received from Lower VFD	When VFD is flashing the green light	Refer to VFD error code list and match to number of blinks on the green LED of VFD.
Convection Temperature High	In Combination program, cavity temperature N6 is measuring in excess of 572°F (300°C) for a minimum of 25 seconds In Convection program, cavity temperature N6 is measuring in excess of 572°F (300°C) for a minimum of 25 seconds	 Check wiring to all components mentioned below. Steam element contactor locked/on. N6 oven cavity temperature probe is defective. N6 oven cavity temperature probe wires connected backwards Relay board, high voltage, defective.
Boiler Temperature High	Boiler temperature is more than 248°F (120°C) for more than 25 seconds, detected by B4 Probe	 Calcium build up in boiler Check wiring to all components mentioned below. Steam element contactor locked/on. B4 boiler temperature probe is defective. B4 probe wires connected backwards Water level probe has calcium build up.
Condensor Temperature High	Condensor water temperature is more than 212°F (100°C) for more than 180 seconds, detected by B3 probe	 Water supply is shut off. Check wiring to all components mentioned below. B3 condensor temperature probe is defective. B3 condensor probe wires connected backwards Single water solenoid valve defective (Y2). Relay board, high voltage, defective.
B11 Core Temperature Probe Single Point Fault	Single point core temperature probe defective or disconnected	 Clean probe receptacle pins with sand paper. B11 Single Point Core Temperature probe with quick connect defective. B11 Single Point Core Temperature probe wires with quick connect disconnected. B11 Single Point Core Temperature probe receptacle defective. B11 Single Point Core Temperature probe receptacle wires disconnected.
N6 Cavity Probe Fault	Cavity temperature probe defective or disconnected	 N6 oven cavity temperature probe defective. N6 oven cavity temperature probe wires.
B10 Core Temperature Probe Multi-point Fault	Multipoint core temperature probe defective or disconnected	B10 multipoint core temperature probe defective. B10 multipoint core temperature probe wires disconnected.
B4 Boiler Probe Fault	Boiler temperature probe defective or disconnected	 B4 boiler temperature probe defective. B4 probe wires connected backwards.
B5 Bypass Probe Fault	Bypass steam temperature probe defective or disconnected	 B5 bypass steam temperature probe defective. B5 bypass steam temperature probe wires connected backwards.
B3 Condensor Probe Fault	Condensor water temperature probe defective or disconnected.	 B3 condensor temperature probe defective. B3 condensor probe wires connected backwards.
B10 - Point 1 - Core Temperature Probe Multipoint Fault	Multipoint core temperature probe defective or disconnected.	 B10 Multipoint Core Temperature probe defective. B10 Multipoint Core Temperature probe wires disconnected.
B10 - Point 2 - Core Temperature Probe Multipoint Fault	Multipoint core temperature probe defective or disconnected.	 B10 Multipoint Core Temperature probe defective. B10 Multipoint Core Temperature probe wires disconnected.
	Error Received from VFD Error Received from Lower VFD Convection Temperature High Boiler Temperature High Condensor Temperature Probe Single Point Fault B10 Core Temperature Probe Multi-point Fault B4 Boiler Probe Fault B5 Bypass Probe Fault B5 Bypass Probe Fault B10 - Point 1 - Core Temperature Probe Multipoint Fault B10 - Point 2 - Core Temperature	Lower VFD Comm Failure When VFD does not respond to a query on the CAN interface. Error Received from VFD When VFD is flashing the green light Error Received from Lower VFD When VFD is flashing the green light Convection Temperature High In Combination program, cavity temperature N6 is measuring in excess of 572°F (300°C) for a minimum of 25 seconds In Convection program, cavity temperature N6 is measuring in excess of 572°F (300°C) for a minimum of 25 seconds Boiler Temperature High Boiler temperature is more than 248°F (120°C) for more than 25 seconds, detected by B4 Probe Condensor Temperature High Condensor water temperature is more than 212°F (100°C) for more than 180 seconds, detected by B3 probe B11 Core Temperature Probe Single Point Fault Cavity temperature probe defective or disconnected B10 Core Temperature Probe Multi-point Fault B3 Bypass Probe Fault B0iler temperature probe defective or disconnected B4 Boiler Probe Fault B5 Bypass Probe Fault Condensor water temperature probe defective or disconnected B5 Bypass Probe Fault Condensor water temperature probe defective or disconnected B10 - Point 1 - Core Temperature Probe Multipoint core temperature Probe Multipoint Fault Condensor water temperature probe defective or disconnected Multipoint core temperature Probe Multipoint Fault Multipoint core temperature Probe Multipoint Fault Multipoint core temperature Probe Multipoint Core Temperature Multipoint core temperature



Error Code	Error Call Out in Display	Description of Error	Possible Cause(s)
E28	B10 - Point 3 - Core Temperature Probe Multipoint Fault	Multipoint core temperature probe defective or disconnected.	 B10 Multipoint Core Temperature probe defective. B10 Multipoint Core Temperature probe wires disconnected.
E29	B10 - Point 4 - Core Temperature Probe Multipoint Fault	Multipoint core temperature probe defective or disconnected.	 B10 Multipoint Core Temperature probe defective. B10 Multipoint Core Temperature probe wires disconnected.
E34	Steam Generator Drain Pump Fault	If water level does not drop below lower water level probe after three minutes when steam generator drain pump is activated in cleaning program.	 Calcium build up in steam generator drain pump. Boiler drain pump defective. Relay board, high voltage, defective. Water level probe defective.
E36	Steam Temperature High	In Steam program, cavity temperature N6 is measuring in excess of 395°F (200°C) for more than 60 seconds. In Combination program, cavity temperature N6 is measuring in excess of 520°F (270°C), for more than 60 seconds. In Retherm program, cavity temperature N6 is measuring in excess of 395°F (200°C), for more than 60 seconds. In Cleaning program, cavity temperature N6 is measuring in excess of 395°F (200°C), for more than 60 seconds.	 Water supply is shut off. Low water pressure. Water injection pipe, calcium build up. Water flow valve defect or calcium build up. Double water solenoid valve defective (Y1). Relay board, high voltage, defective.
E40	B3 Fault	B3 probe shorted to ground	— Defective or miswired probe.
E41	B4 Fault	B4 probe shorted to ground	Defective or miswired probe.
E42	B5 Fault	B5 probe shorted to ground	— Defective or miswired probe.
E43	N6 Fault	N6 probe shorted to ground	— Defective or miswired probe.
E44	N8 Fault	N8 probe shorted to ground	— Defective or miswired probe.
E45	B10 Fault	B10 probe shorted to ground	— Defective or miswired probe.
E46	B10 - Point 1 Fault	B10 probe shorted to ground	— Defective or miswired probe.
E47	B10 - Point 2 Fault	B10 probe shorted to ground	— Defective or miswired probe.
E48	B10 - Point 3 Fault	B10 probe shorted to ground	— Defective or miswired probe.
E49	B10 - Point 4 Fault	B10 probe shorted to ground	— Defective or miswired probe.
E51	No Water In Boiler	Lower water level probe B2 is not satisfied within 5 minutes, after water solenoid valve Y1 is activated	 Water supply is shut off. Low water pressure. Boiler drain cap missing. Boiler drain pump defective. Drain pump elbow leaking. Water level probe has calcium build up. Double water solenoid valve defective (Y1). Relay board, high voltage, defective.
E53	Fan Motor High Temperatures	Fan motor does not spin, result in overheating, detected by motor coil safety thermo element. Temperature more than 320°F (160°C).	 Motor high limit open or wired incorrectly. If LED on motor control flashes, see error codes for motor control. Motor or fan wheel locked. Fan wheel damaged.
E54	Lower Fan Motor High Temperature	Lower fan motor does not spin, result in over-heating, detected by motor coil safety thermo element. Temperature more than 320°F (160°C).	- Motor high limit open or wired incorrectly. - If LED on motor control flashes, see error codes for motor control. - Motor or fan wheel locked. - Fan wheel damaged.

CTP Combitherm



Error Code	Error Call Out in Display	Description of Error	Possible Cause(s)
E55	Vent Not Open (Lower vent on dual vent system)	60 seconds after the venting motor is activated the vent motor safety switch did not open.	- Alignment issue between motor cam and vent motor safety switch (micro switch) Faulty vent valve (motor) Faulty vent valve safety switch (micro switch).
E56	Vent 2 Not Open (Upper vent on dual vent system)	60 seconds after the venting motor is activated the vent motor safety switch did not open.	- Alignment issue between motor cam and vent motor safety switch (micro switch) Faulty vent valve (motor) Faulty vent valve safety switch (micro switch).
E57	No Rinse Water	Flow switch for solenoid valve Y4 does not detect any water flow for a minimum of 60 seconds.	 Water supply is shut off. Low water pressure. Flow switch is dirty or defective. Double water solenoid valve defective (Y3). Relay board, high voltage, defective.
E88	NOTE: If after 2 attempts to clear this error, the error appears a third time, remove the oven from service and immediately contact an Alto-Shaam authorized service provider.	Reset output from Ignition Module is ON	 Hot surface ignitor not functioning. No gas supply. Flame sensor not functioning. Faulty ignition control.
E89	Upper Gas Ignition Failure NOTE: If after 2 attempts to clear this error, the error appears a third time, remove the oven from service and immediately contact an Alto-Shaam authorized service provider.	Reset output from Ignition Module is ON	 Hot surface ignitor not functioning. No gas supply. Flame sensor not functioning. Faulty ignition control.
E90	Lower Gas Combustion Blower Not at Speed	Speed is too slow.	 — Power supply cable is not connected to blower motor. — Speed control cable is not connected to blower motor. — Blower motor is blocked, rotation is impeded, or motor is faulty. — Faulty control board.
E91	Upper Gas Blower Not at Speed	Speed is to slow.	 — Power supply cable is not connected to blower motor — Speed control cable is not connected to blower motor — Blower motor is blocked, rotation is impeded, or motor is faulty — Faulty control board
E92	Communication Error CB does not properly respond	Twelve (12) instances of no- response from the relay board (CB) to the display board (IB).	 Check CAN cable connections. CAN cable defective. Relay board, low voltage, connector defective. Display board connector defective.
E93	Interface Board (IB) and Control Board (CB) are in different states	The IB is in a different running state than the CB for more than 20 seconds.	 Check CAN cable connections. CAN cable defective. Relay board, low voltage, connector defective. Display board connector defective.
E94	Communication Error, TO Interface Board	No signal transfer for more than 20 seconds between the Interface Board (IB) and the Control Board (CB).	 Check CAN cable connections. CAN cable defective. Relay board, low voltage, connector defective. Display board connector defective.



Error Code	Error Call Out in Display	Description of Error	Possible Cause(s)
E100	One or more maintenance reminder has timed out.	When any maintenance reminder has expired without action having been taken by the operator.	— Enter maintenance reminder screen and address the item that has timed out and reset
E101	Ventless Hood Fault - No Pressure	If the power switch or pressure switch is not closed.	 Check power switch is on. Check vent motor is turning in the proper direction. Pressure switch is miss wired or defective. Filter(s) require cleaning or replacement
E102	Ventless Hood Fault — Filters Not Present	If the air filter switches are not closed.	 Check filters are installed and properly seated. Check filter switches are not damaged, defective or dislodged.
E103	Option Board Doesn't Send Switch Setting	OB not communicating its switch settings to the CB.	 Check CAN cable connection between OB and CB. Ensure CB dip switch is set to see an OB. Incompatible OB and CB software (update software). OB defective. CB defective.
E104	Option Board Not Communicating	Option board is not communicating with CB.	 Check option board CAN connection at CB and OB. Defective OB. Defective CB.
E105	No or Low Water Pressure	Water pressure switch not activated.	 Water supply not connected. Water supply is shut off. Water supply to unit blocked or obstructed Faulty or miswired pressure switch
E106	Boiler Drain Pump Fault	Hall effect or rotational sensor is not sending a signal to the relay board	 — Drain pump motor not running or defective. — Hall effect sensor broken or incorrectly wired. — Motor improperly wired.
E108	Cooling Fan Failure	If the temperature on the control board (relay board) is greater than 140°F (60°C) and less than 176°F (80°C). (See error code E02)	 Cooling fan damaged. Cooling fan blocked or blades have been kept from rotating. Incoming air temperature exceeds 100°F (38°C). Air inlet has become blocked.
E109	High Limit Switch NOTE: Any oven experiencing this error should be investigated by an authorized Alto-Shaam service provider.	The High Limit Switch input to the CB (N7) is "open"	 Unit has experienced an over heat condition. Convection element contactors stuck closed. Failed Y1 solenoid. Obstruction between Y1 solenoid and injection pipe. Improperly connected drain. Condensate pan clean out not closed. Improperly wired high limit switch at the switch or at the CB. Defective high limit switch.

CTP Combitherm




Error Code	Error Call Out in Display	Description of Error	Possible Cause(s)
E200	The SD card has been detected to be larger than 2GB in size.	The SD card inserted is larger than 2GB in size.	 SD card is larger than 2GB in size. Contact service to order replacement SD card.
E210	VFD Under Voltage	VFD has detected an undervoltage situation.	— Possible VFD failure.
E211	VFD Over Voltage	VFD has detected an over-voltage situation.	— Possible VFD failure.
E212	VFD Overheating	VFD has detected an overheat situation.	 Unit has experienced an over heat condition. Defective high limit switch. Defective cooling fans. Possible VFD failure.
E213	Motor Over Current	Motor over current detected.	— Blocked fan wheel.— Possible VFD failure.
E214	VFD Current Peak	VFD current peak detected.	— Possible VFD failure.
E215	VFD EEPROM Error	VFD EEPROM error detected.	— Possible VFD failure.
E216	VFD Over Current	VFD over current detected.	— Possible VFD failure.
E217	VFD Short Circuit	VFD Short Circuit detected.	— Possible VFD failure.
E218	VFD Voltage Error	VFD voltage does not correspond to jumper settings.	VFD voltage jumper is not correct.Possible VFD failure.
E220	Lower VFD Under Voltage	Lower VFD has detected an under-voltage situation.	— Possible Lower VFD failure.
E221	Lower VFD Over Voltage	Lower VFD has detected an overvoltage situation.	— Possible Lower VFD failure.
E222	Lower VFD Overheating	Lower VFD has detected an overheat situation.	 Unit has experienced an over heat condition. Defective high limit switch. Defective cooling fans. Possible Lower VFD failure.
E223	Lower Motor Over Current	Lower Motor over current detected.	— Possible Lower VFD failure.
E224	Lower VFD Current Peak	Lower VFD current peak detected.	— Possible Lower VFD failure.
E225	Lower VFD EEPROM Error	Lower VFD EEPROM Error detected.	— Possible Lower VFD failure.
E226	Lower VFD Over Current	Lower VFD over current detected.	— Possible Lower VFD failure.
E227	Lower VFD Short Circuit	Lower VFD short circuit detected.	— Possible Lower VFD failure.
E228	Lower VFD Voltage Error	Lower VFD voltage does not correspond to jumper settings.	Lower VFD voltage jumper is not correct.Possible Lower VFD failure.
E289	Unknown Error from VFD	VFD has provided an unknown error.	— Possible VFD failure.
E290	Unknown Error from Lower VFD	Lower VFD has provided an unknown error.	— Possible Lower VFD failure.



Touch Motor Control Error Codes

The LED is located on the variable frequency drive (VFD) 1 of the oven.

Type of Error	Indication	Release of Error
Undervoltage	LED flashing sequence, with 1 flash per period.	Voltage of intermediate circuit is less than 250V
Overvoltage	LED flashing sequence, with 2 flashes per period.	Voltage of intermediate circuit exceeds 445V
Excess Temperature	LED flashing sequence, with 3 flashes per period.	Temperature sensor in the power unit is more than 199°F (93°C)
Current Peak	LED flashing sequence, with 4 flashes per period.	Blocked motor, detected by current peak monitoring from 900 rpm rotating field
Overcurrent	LED flashing sequence, with 5 flashes per period.	Intermediate circuit current exceeds 4.0 A
Short-circuit	LED flashing sequence, with 6 flashes per period.	Release of interrupt at intermediate circuit current larger than 53 A
Power on	LED flashing sequence, with 7 flashes per period.	Effective mains voltage does not correspond to jumper setting 115V/230V
Watchdog	LED flashing sequence, with 8 flashes per period.	Watchdog of the microcontroller released, program crash

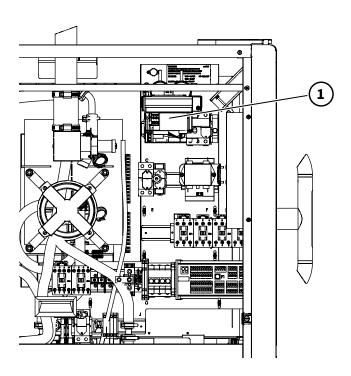





Introduction

Alto-Shaam, Inc. warrants to the original purchaser only, that any original part found to be defective in material or workmanship will be replaced with a new or rebuilt part at Alto-Shaam's option, subject to provisions hereinafter stated.

Warranty Period

The original parts warranty period is as follows:

- For all other original parts, one (1) year from the date of installation of appliance or fifteen
- (15) months from the shipping date, whichever occurs first.
- The labor warranty period is one (1) year from the date of installation or fifteen (15) months from the shipping date, whichever occurs first.
- Alto-Shaam will bear normal labor charges performed during standard business hours, excluding overtime, holiday rates or any additional fees.
- For the refrigeration compressor, if installed, the warranty period is five (5) years from the date of original installation of the appliance.
- For heating elements on Halo Heat® Cook and Hold ovens, the warranty period is for as long as the original owner owns the oven. This warranty period applies to units sold after 2/1/2009 and excludes holding-only ovens.
- To be valid, a warranty claim must be asserted during the applicable warranty period. This warranty is not transferable.

Exclusions

This warranty does not apply to:

- Calibration.
- Replacement of light bulbs, rubber gaskets, grease filters, air filters, racks, jet plates, and/ or the replacement of glass due to damage of any kind.
- Equipment damage caused by accident, shipping, improper installation or alteration.
- Equipment used under conditions of abuse, misuse, carelessness or abnormal conditions, including but not limited to, equipment subjected to harsh or inappropriate chemicals, including but not limited to, compounds containing chloride or quaternary salts, poor water quality, or equipment with missing or altered serial numbers.
- Equipment damage caused by use of any cleaning agents other than those recommended by Alto-Shaam, including but not limited to damage due to chlorine or other harmful chemicals.
- Any losses or damage resulting from malfunction, including loss of food product, revenue, or consequential or incidental damages of any kind.
- Equipment modified in any manner from original model, substitution of parts other than factory authorized parts, unauthorized removal of any parts including legs, or unauthorized addition of any parts.
- Equipment damage incurred as a direct result of poor water quality*, inadequate maintenance of steam
 generators and/or surfaces affected by water. Water quality and required maintenance of steam generating
 equipment is the responsibility of the owner/ operator.
- Equipment damage incurred as a result of not following the required maintenance schedule published in the manuals for the equipment.

Conclusion

This warranty is exclusive and is in lieu of all other warranties, express or implied, including the implied warranties of merchantability and fitness for a particular purpose. No person except an officer of Alto-Shaam, Inc. is authorized to modify this warranty or to incur on behalf of Alto-Shaam any other obligation or liability in connection with Alto-Shaam equipment.

*Refer to the product spec sheet for water quality standards.



ALTO-SHAAM ASIA

Shanghai, China Phone +86-21-6173 0336

ALTO-SHAAM CANADA

Concord, Ontario Canada Toll Free Phone 866-577-4484 Phone +1-905-660-6781

ALTO-SHAAM CENTRAL & SOUTH AMERICA

Miami, FL USA Phone +1-954-655-5727

ALTO-SHAAM MIDDLE EAST & AFRICA

Dubai, UAE Phone +971 4 321 9712

ALTO-SHAAM MEXICO

Phone +52 1 477-717-3108

ALTO-SHAAM FRANCE, L.L.C.

Aix en Provence, France Phone +33(0)4-88-78-21-73

ALTO-SHAAM GMBH

Bochum, Germany Phone +49(0)234-298798-0

ALTO-SHAAM RUSSIA

Moscow, Russia Phone +7-903-793-2331

